

**Tools Required:**

2.5mm hex key  
3mm hex key  
Phillips head screw driver medium

CSA certified to U.S. and Canadian standards.  
Suitable for wet locations.

**Protection Class:** IP65

**Weight:** 3 lbs.



• A • • B •

**Dimensions**

**A:** 6-1/8"

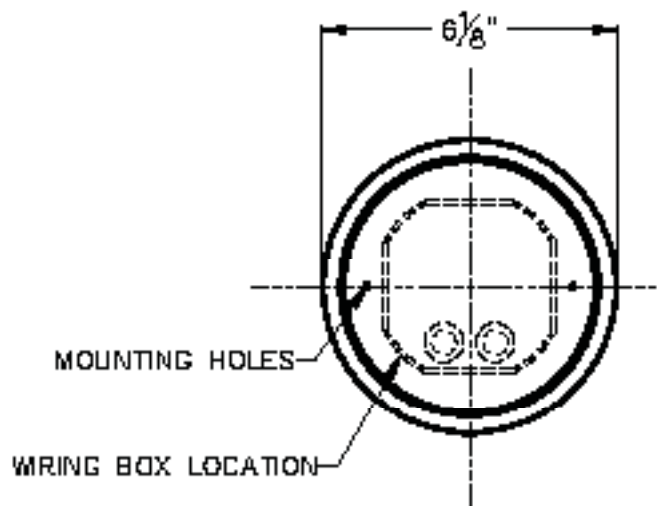
**B:** 2-7/8"


**Notice to Installer for 3502LED:**

- BEGA luminaires may be damaged if connected to conduit systems containing water- Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".**
- Mounts directly to a standard octagonal 4" wiring box (by others) using BEGA mounting kit (supplied).
- In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.
- LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

**3502LED - installation:**

- Loosen 3mm set screw on luminaire outer trim ring and turn ring to the stop (ccw).  
Remove trim ring with glass from luminaire base.
- Loosen (2) hex screws on LED module plate and **CAREFULLY** remove LED module - trying not to come into direct contact with the LED chips.
- Route LED wiring through luminaire base and into small opening wiring box for connections to be made.
- Make supply wiring and luminaire wiring connections in the octagonal wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
WIRE GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
Dimming (if applicable):  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
- Mount luminaire base to surface using hardware by others (minimum 6-32 screw size).
- Replace the LED module carefully along with luminaire lens and trim ring. Turn trim ring to the stop (cw) and tighten outer set screw to secure.


**Relamping/Maintenance**

No relamping necessary.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
Lens	11286311
Gasket	831312
LED driver (0-10V)	75929
LED replacement (3000K)	LED-0229/830
LED replacement (4000K)	LED-0229/840

**Lamp:** 5.3W LED