

COLORBODY™ PORCELAIN
SPARK™



SPARK™

COLORBODY™ PORCELAIN

floor • wall • countertop

If you want tile with style and a textured fabric-like surface, there's no better choice than Daltile's new Spark™ collection. Revel in the hues of this graphic contemporary ColorBody™ Porcelain tile. Ideal for both commercial and residential applications, it brings taste, sophistication and style to any design. Offered in a variety of rich complementary colors, all with a subtle luminescence, it commands attention. Create a modern and glamorous space that will leave a lasting impression.



Field Tile



FIRELIGHT FLICKER SK50




EMBER FLARE SK51



TOASTED LUSTER SK52



SMOKY GLIMMER SK53

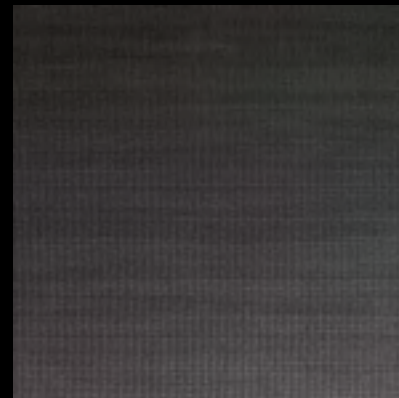


MIDNIGHT GLOW SK54

Mosaic Blend



COOL BLEND MOSAIC SK55
(FIRELIGHT FLICKER, SMOKY GLIMMER & MIDNIGHT GLOW)



FIRELIGHT FLICKER
MIDNIGHT GLOW
SMOKY GLIMMER




WARM BLEND MOSAIC SK56
(EMBER FLARE, TOASTED LUSTER & FIRELIGHT FLICKER)



EMBER FLARE
FIRELIGHT FLICKER
TOASTED LUSTER

CREATIVE IDEAS

Decorative Accents

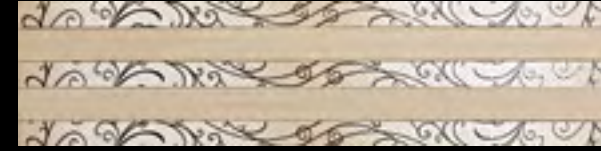

FIRELIGHT FLICKER/EMBER FLARE SK57
6 X 24 DECORATIVE ACCENT



FIRELIGHT FLICKER/TOASTED LUSTER SK58
6 X 24 DECORATIVE ACCENT



SMOKY GLIMMER/MIDNIGHT GLOW SK59
6 X 24 DECORATIVE ACCENT


Wall Decorative Accents



FIRELIGHT FLICKER SK60
12 X 24 WALL DECORATIVE ACCENT
(THIN TILE)*




EMBER FLARE SK61
12 X 24 WALL DECORATIVE ACCENT
(THIN TILE)*

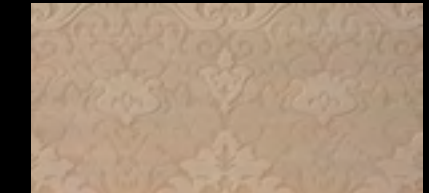

TOASTED LUSTER SK62
12 X 24 WALL DECORATIVE ACCENT
(THIN TILE)*



SMOKY GLIMMER SK63
12 X 24 WALL DECORATIVE ACCENT
(THIN TILE)*

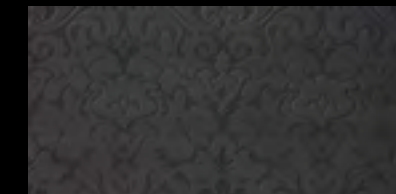

MIDNIGHT GLOW SK64
12 X 24 WALL DECORATIVE ACCENT
(THIN TILE)*

* Thin Tile 12 x 24 Wall Tile and Decorative Accents are available in all colors via Special Order.

Backsplash Design Ideas



Backsplash features Ember Flare 12 x 24 Thin Wall Tile and Firelight Flicker/Ember Flare 6 x 24 Thin Wall Decorative Accent.



Photo features Firelight Flicker 12 x 24 in a grid pattern on the floor.

SPARK™ COLORBODY™ PORCELAIN

SIZES

		SQ.FT. CARTON	PIECES PER CARTON
24 x 24 Field Tile	23-1/2" x 23-1/2" (59.5 cm x 59.5 cm)	11.62	3
12 x 24 Field Tile	11-5/8" x 23-1/2" (29.6 cm x 59.5 cm)	11.62	6
12 x 24 Wall Tile (Thin Tile)*	11-5/8" x 23-1/2" (29.6 cm x 59.5 cm)	11.62	12
12 x 12 Field Tile	11-5/8" x 11-5/8" (29.6 cm x 29.6 cm)	10.65	11
12 x 24 Wall Decorative Accent (Thin Tile)*	11-5/8" x 23-1/2" (29.6 cm x 59.5 cm)	11.62	12
6 x 24 Decorative Accent	5-13/16" x 23-1/2" (29.6 cm x 59.5 cm)	--	6
1 x 2 Mosaic (Mesh-mounted)	Sheet 11-5/8" x 11-5/8" (Sheet 29.6 cm x 29.6 cm)	--	11

*Thin Tile 12 x 24 Wall Tile and Decorative Accents are available in all colors via Special Order.

LINEAR OPTIONS™ SIZE

		SQ.FT. CARTON	PIECES PER CARTON
6 x 24 File Tile	6" x 23-1/2" (14.63 cm x 59.5 cm)	10.65	11
4 x 24 File Tile	4" x 23-1/2" (9.73 cm x 59.5 cm)	6.46	10
2 x 24 File Tile	2" x 23-1/2" (4.67 cm x 59.5 cm)	6.66	20

Additional linear and rectangular sizes available through Linear Options™ ... Daltile's linear cutting service. Visit www.daltileproducts.com/lineartoptions for sizes and order information.

RESIDENTIAL

RESIDENTIAL USAGE

	FLOOR	WALL	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
	F	W	C	EP	ED

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios*	✓	✓	✓	✓	
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed.

*Thin Tile suitable for wall use only.

TRIM

TYPE	SIZE	PIECES PER CARTON
Bullnose S-43C9	3 x 12	30
Cove Base S-36C9TB	6 x 12	30
Cove Base Corner SC-36C9TB	1 x 6	15

SHADE VARIATION

	HIGH (V3) Some variation from tile to tile and within each tile
--	--

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
7/16" 3/16" (Thin Tile)	1/8" (3/16" when rectangular sizes are used in a staggered brick-joint pattern, where the overlap does not exceed 33%)

SLIP RESISTANCE (WET) : 3
The higher the rating, the higher the slip resistance.

1	< .50
2	.50 - .59
3	≥ .60

TEST RESULTS (Excludes Thin/Wall Tile)

	ASTM#	TILE RESULTS	THIN TILE RESULTS
Water Absorption	C373	<0.5%	<0.5%
Breaking Strength	C648	>500 lbs	100-200 lbs
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant
Coefficient of Friction	C1028	Wet: ≥0.60 Dry: ≥0.70	--

NOTES

Thin Tile is for wall use only. Please see your architectural representative regarding installation and maintenance recommendations.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Special care needs to be given when installing tiles 20" and larger. Please refer to www.daltile.com/LargeTiles for information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A 1371.1 standards.

For additional information, refer to "Factors to Consider" at www.daltile.com/CommercialFactors.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

SPARK™

COLORBODY™ PORCELAIN



floor • wall • countertop



daltile
greenworks
ENVIRONMENTAL LEADERSHIP THAT WORKS

By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.



LINEAR
OPTIONS



TRU-EDGE



EXTERIOR
PRODUCT



daltile®

7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE
For more information about Daltile products and services, visit our website at daltileproducts.com

Printed using soy inks.

©2011 DalTile Corporation (1/11) SDDTSPARK