


CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-1260-RB-AR

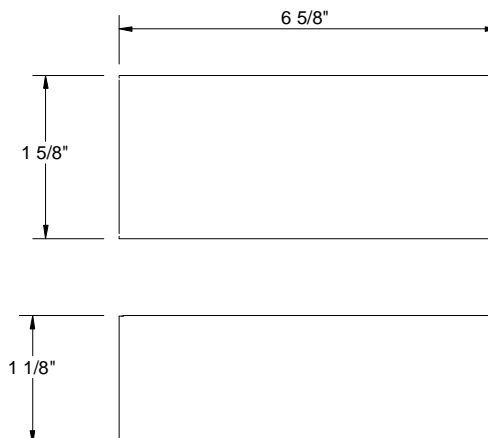

Ordering Matrix		
Model	Finish	Accessories
<div></div>	<div></div>	
EN-1260-RB-AR	BK	See table below


Ordering Example (model) : EN-1260-RB-AR

Product Details		Specification Features
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.	<ul style="list-style-type: none"> U.L. 2108 listed electronic low voltage transformer. Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. 5 year W.A.C. Lighting product warranty.
Catalog Number:	EN = Advanced electronic circuitry 1260 = 12 volt , 60 watt RB = Remote Boxed AR = Auto-Reset	
Input:	120V (50/60Hz)	
Output:	12V	
Min Load:	20W	
Max Load:	60W	
Max Input Amp:	0.53A (@ 120V)	
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.	
Listing:	U.L. listed, File Number E204239.	
Accessories:	MTB-01 – Terminal Block	

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-1275-RB-AR

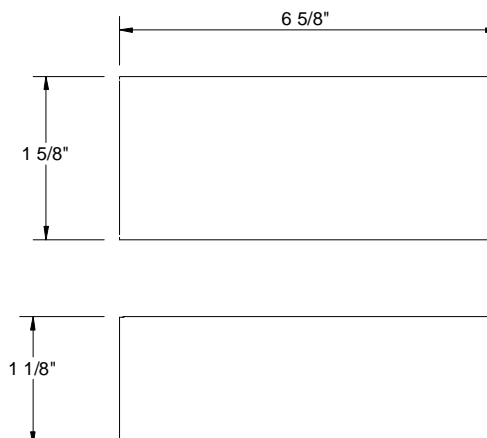

Ordering Matrix		
Model	Finish	Accessories
<input type="text"/>	<input type="text"/>	
EN-1275-RB-AR	BK	See table below


Ordering Example (model) : EN-1275-RB-AR

Product Details		Specification Features
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.	<ul style="list-style-type: none"> U.L. 2108 listed electronic low voltage transformer. Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. 5 year W.A.C. Lighting product warranty.
Catalog Number:	EN = Advanced electronic circuitry 1275 = 12 volt , 75 watt RB = Remote Boxed AR = Auto-Reset	
Input:	120V (50/60Hz)	
Output:	12V	
Min Load:	35W	
Max Load:	75W	
Max Input Amp:	0.625A (@ 120V)	
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.	
Listing:	U.L. listed, File Number E204239.	
Accessories:	MTB-01 – Terminal Block	

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-12150-RB-AR

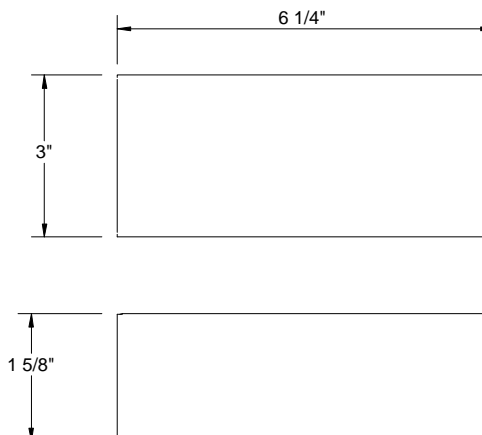

Ordering Matrix		
Model	Finish	Accessories
<div></div>	<div></div>	
EN-12150-RB-AR	BK	See table below


Ordering Example (model) : EN-12150-RB-AR

Product Details		Specification Features
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.	<ul style="list-style-type: none"> U.L. 2108 listed electronic low voltage transformer. Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. 5 year W.A.C. Lighting product warranty.
Catalog Number:	EN = Advanced electronic circuitry 12150 = 12 volt , 150 watt RB = Remote Boxed AR = Auto-Reset	
Input:	120V (50/60Hz)	
Output:	12V	
Min Load:	50W	
Max Load:	150W	
Max Input Amp:	1.25A (@ 120V)	
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.	
Listing:	U.L. listed, File Number E204239.	
Accessories:	MTB-01 – Terminal Block	

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-24150-RB-AR

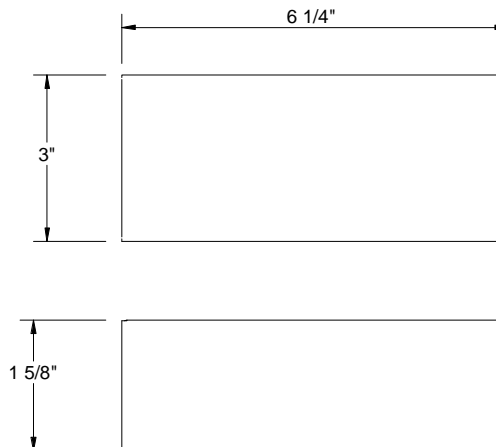

Ordering Matrix		
Model	Finish	Accessories
<input type="text"/>	<input type="text"/>	
EN-24150-RB-AR	BK	See table below


Ordering Example (model) : EN-24150-RB-AR

Product Details		Specification Features
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.	<ul style="list-style-type: none"> U.L. 2108 listed electronic low voltage transformer. Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. 5 year W.A.C. Lighting product warranty.
Catalog Number:	EN = Advanced electronic circuitry 24150 = 24 volt , 150 watt RB = Remote Boxed AR = Auto-Reset	
Input:	120V (50/60Hz)	
Output:	24V	
Min Load:	50W	
Max Load:	150W	
Max Input Amp:	1.25A (@ 120V)	
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.	
Listing:	U.L. listed, File Number E204239.	
Accessories:	MTB01 – Terminal Block	

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-B12PY-AR

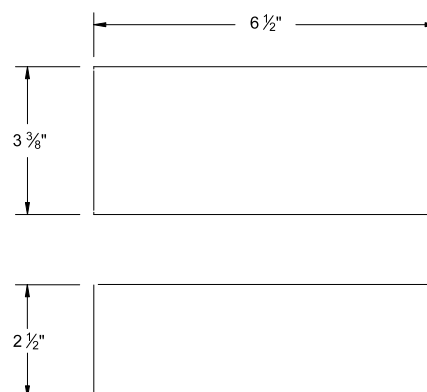

Ordering Matrix	
Model	Accessories
EN-B12PY-AR	See table below

Ordering Example (model) : EN-12BPY-AR

Product Details		Specification Features
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.	<ul style="list-style-type: none"> Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. 5 year WAC Lighting product warranty.
Catalog Number:	EN = Electronic 12B = 12volt, boxed PY = 250w AR = Auto-Reset	
Input:	120V (50/60Hz)	
Output:	12V	
Min Load:	100W	
Max Load:	250W	
Max Input Amp:	2.0A (@ 120V)	
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.	
Listing:	U.L. and C.U.L. listed. File Number E204239	
Accessories:	MTB01 – Terminal Block	


CATALOG NUMBER

TYPE

PROJECT

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-B24PZ-AR

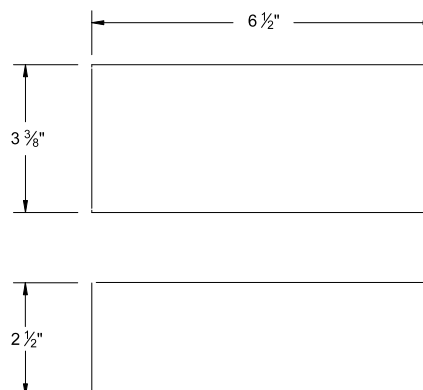

Ordering Matrix

Model	Finish	Accessories
<div></div>	<div></div>	
EN-B24PZ-AR	BK	See table below

Ordering Example (model) : EN-B24PZ-AR

Product Details

Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Electronic B24 = 24volt, boxed PZ = 300w AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	24V
Min Load:	100W
Max Load:	300W
Max Input Amp:	2.5A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Listing:	U.L. and C.U.L. listed. File Number E204239
Accessories:	MTB01 – Terminal Block

Specification Features

- Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life.
- In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours.
- Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer.
- 5 year WAC Lighting product warranty.