

PixMobile Adjustable Table AT2C-42JFS & AT2C-42JF

Form E-433

Tools Required

5/32" and 1/8" Allen wrench and 3/8" and 7/16" wrench.

1. The AT2C-42JFS or AT2C-42JF tables may be assembled in any one of eight heights for optimum utilization. These heights are from 28" to 42", in 2" increments, based on the use of 4" casters. See Figure 1 for hole alignment.
2. The desired height may be obtained by raising the top table portion to the height preferred, then installing the four screws provided (one in each leg) in the holes that are aligned. Secure the screws and nuts with the allen wrench provided.

TOP SHELF HEIGHT

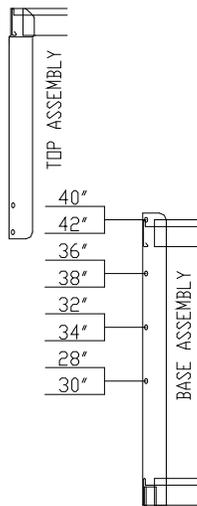


Figure 1

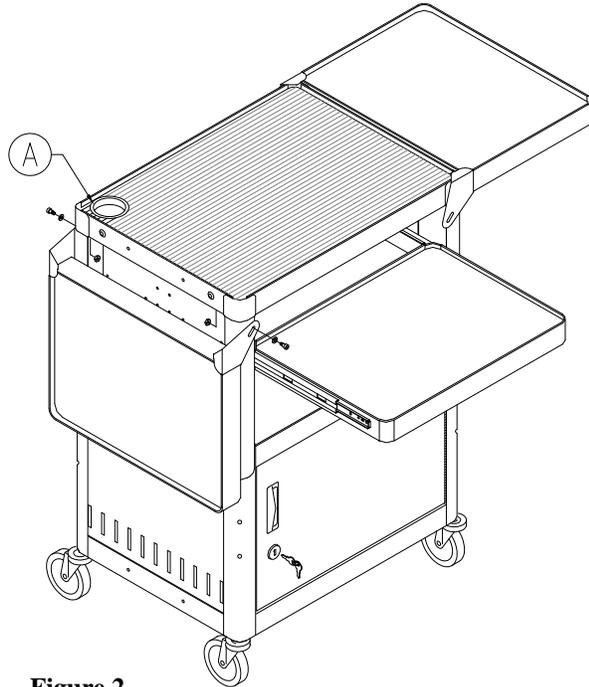


Figure 2

3. Install grommets into the cord management holes. See Figure 2.
4. Assemble the flip-up shelves with two nylon washers, one hex nut, and one shoulder bolt to each table leg. One nylon washer must be placed between the shelf bracket and table leg. See Figure 3.
5. Tighten both shoulder bolts. The nylon washers should move freely.
6. Engage the flip-up shelves in the horizontal position by hooking the small bent tab on the shelf brackets over the lip of the top shelf.
7. Adjust the cabinet door by loosening the fasteners on the door and moving the door into position. Tighten the fasteners.

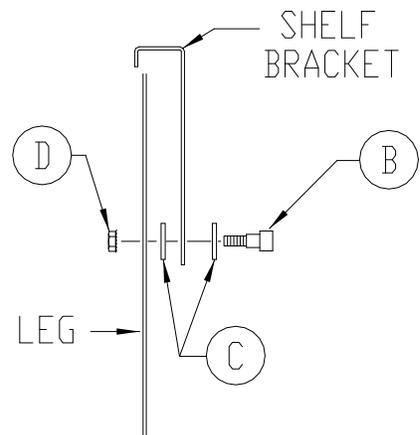


Figure 3

	Qty	Description
A	2	Grommet, 2-1/2"
B	4	Screw, shoulder, #10-24 x 1/4"
C	8	Washer, flat, #10 nylon
D	4	Nut, hex, #10-24
E	4	Screw, Cap, 1/4"-20 x 1/2"
F	4	Nut, Lock, 1/4"-20
G	2	Key

DA-LITE SCREEN COMPANY, INC.

3100 North Detroit Street
 Post Office Box 137
 Warsaw, IN 46581-0137
 Phone: 574/267-8101
 800-622-3737
<http://www.da-lite.com>