

AR70S[®] Towel Warmer

DENBY

TECHNICAL SPECIFICATIONS

Rev 01/09

MODEL# **M17245**

ELECTRIC VERSION Element specifications 300W, 110V, 48" cord, UL approved. See separate technical sheet for details of CSA-US approved hardwire kit.


HYDRONIC VERSION Heat output 3325 BTU. 1/2" BSPT tapings. Steel towel warmers should only be used in a closed water system, incorporating a rust inhibitor.

CARE & MAINTENANCE A periodic wash using warm water and a soft cloth will retain the high quality finish of your towel warmer for many years to come. ON NO ACCOUNT should any household bleaches, detergents, abrasive polish, steel wool or similar cleaning agents be used on this product.


WALL FIXING Towel warmer brackets must be securely fastened to either masonry, wall studs or plywood board in accordance with the fitting instructions.

PACKAGING Packaged for regular UPS type shipping.

WARRANTY Frame 5 years – Heating element 1 year.

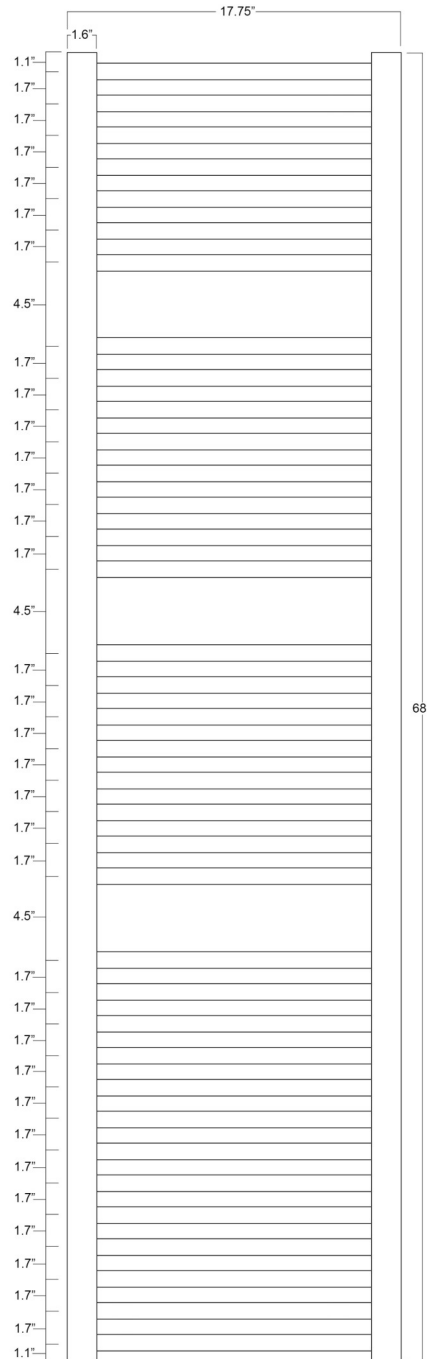

Centre Point for Wire Cover Back Box
(See separate technical sheet) 4.0"
(Electric Model)

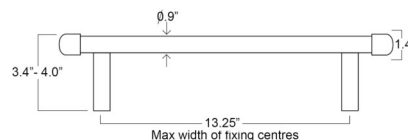

Position mounting brackets as near to each edge as possible and between the first or second cross bars