


LCAPDVD2-X3

**DVD Mount to hang below
LC100 or LC200 Mounts
Fits Equipment 15"-20" Wide and
up to 3-1/4" Tall**

- 1) Measure the width of the DVD Player
- 2) Slide the LCAPDVDX3 Left & Right Arms into the LCAPDVD2 Center until they are the same distance apart as the width of the DVD Player. Place the hooks in the appropriate slot that leaves a 1/2" - 1" space between the #10-24 Nut and the Left & Right Sliding Arms.
- 3) Place the DVD Player between the Left & Right Arms with the front of the DVD Player projecting out the same distance as the depth of the monitor or farther if needed for wall clearance.
- 4) Tighten the Slot Head Screws, or Button Hex Head Security Screws, into the threaded nuts on the hooks until the DVD can not be easily removed from the Left & Right Sliding Arms. The Friction Pads need to be tight enough to prevent the DVD player from being pulled out.
- 5) Attach the LCAPDVD2 to the LCD Flat Screen Mount by removing the monitor attaching screws used to mount the LCD Flat Screen Mount and inserting the LCAPDVD2 between the monitor and LCD Flat Screen Mount.
- 6) If the screws removed from the monitor are no longer long enough to attach the monitor through the addition of the LCAPDVD2, an assortment of longer setscrews, nuts and washers have been provided to give greater depth of attachment.

Hardware List

- 2 #10-24 x 1" Slot Head Screws
- 2 #10-24 x 1" Button Hex Head Security Screws
- 4 4mm x 25mm Setscrews
- 4 5mm x 30mm Setscrews
- 4 6mm x 30mm Setscrews
- 8 4mm Hex Nuts
- 8 5mm Hex Nuts
- 8 6mm Hex Nuts
- 8 5mm Washers
- 8 1/4" Washers

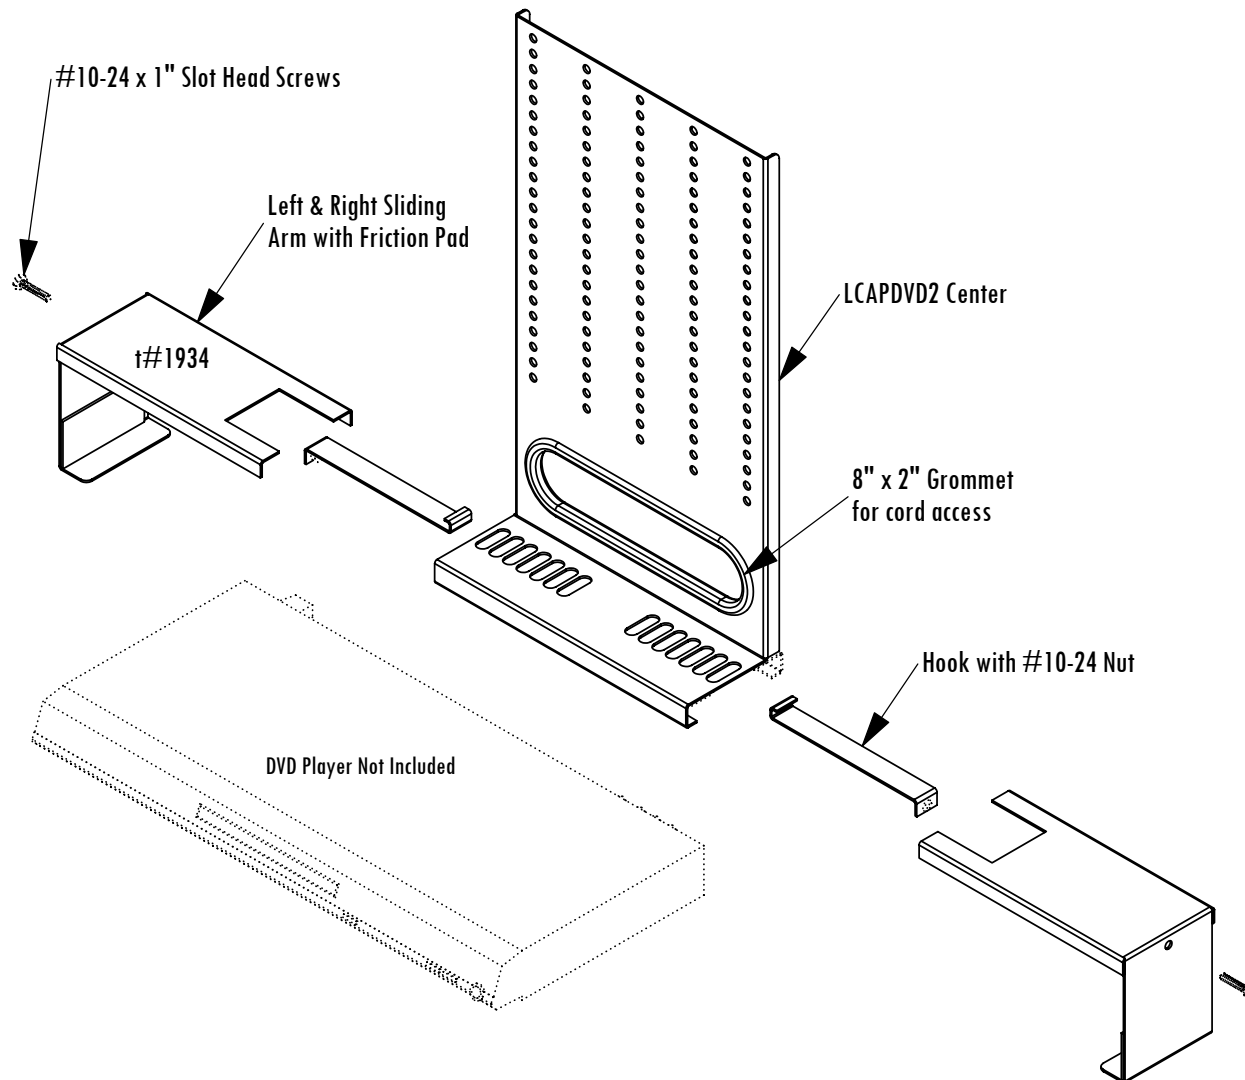

Protected under one or more of these U.S. Patent numbers: 3,291,432; 3,559,942; 3,724,798; DES.270,689; 4,613,109; 4,878,645; 4,852,842; DES.309,562; 4,973,023; 5,169,114; 5,255,884; 5,310,152; 5,522,576; 5,621,614; Re.35,677; DES.398,834; 5,826,384; 5,941,492; 5,984,068; 6,060,661; 6,102,398; 6,158,704; 6,454,116; 6,761,276; 6,806,425; 6,806,425B1