




WARMLY YOURS
MAKING COMFORT EASY


Snow Melt and Slab Heating Cables (All-Purpose) MODEL WHCA

FEATURES & BENEFITS

- Installs in asphalt, concrete, or in mortar under pavers
- Available in lengths ranging from 43' (1,310cm) to 428' (13,454cm).
- CSA Certified for outdoor use in Canada and US
- Offered in 120V or 240V configurations
- Energy efficient twin-conductor heating cable
- High temperature rated cable (ideal for asphalt or concrete)

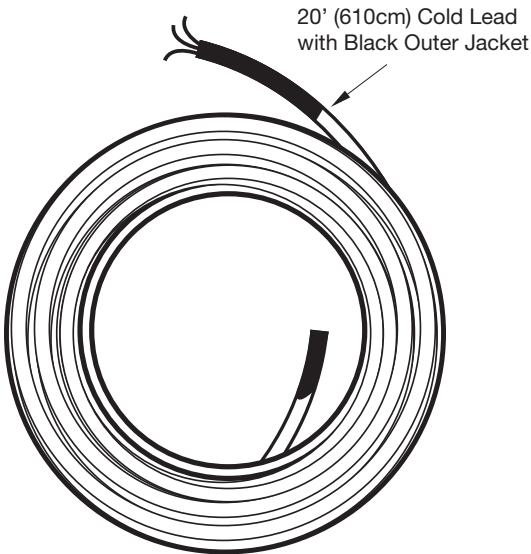

1/4" (6 mm) Twin-Conductor Heating Cable

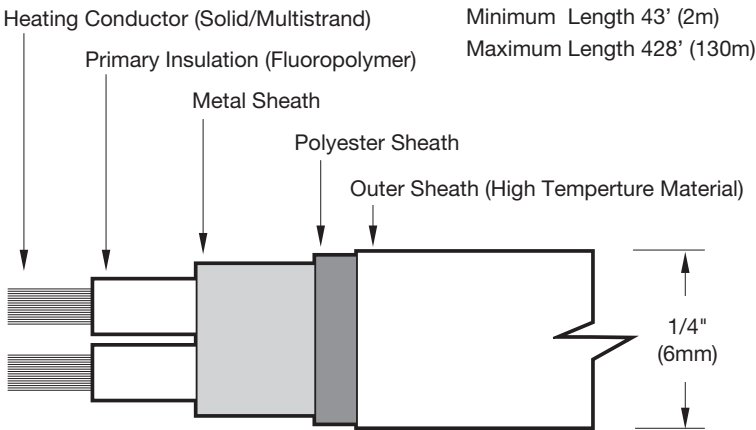

COLD LEAD COLOR CHART

Voltage	Cold Lead Colors
120V	Yellow (neutral)
	Black (hot)
	Green-Yellow (ground)
240V	Red (hot)
	Black (hot)
	Green-Yellow (ground)

DESCRIPTION

WarmlyYours snow melt cable installs in asphalt, concrete or under pavers. Rated for use on indoor and outdoor slab heating applications. Twin Conductor Heating Cable constructed with a high temperature rated cable for extra protection during installation. Perfect for odd shaped areas and stairways. Offered in 120V and 240V configurations for use in residential and commercial applications. Each cable features a 1/4" (6mm) twin-conductor heat resistant cable for energy efficient operation. Generates 12 watts per lineal foot

(39 watts per lineal meter) for dependable and efficient snow melt performance. Available in lengths ranging from 43' (13m) to 428' (130m) providing coverage for a wide selections of areas. Equipped with 14 AWG 20' (6m) of cold lead. Wires are color coded on 120V systems as yellow (neutral), black (hot) and green-yellow (ground); 240V systems are black (hot), red (hot) and green-yellow (ground). All cables are CSA certified for outdoor use in Canadian and US markets.



SPECIFICATIONS

Part #:	Cable Length (ft/m)	Voltage	Total Ohms	Total Watts	AMPS	*Weight (lbs./kg)
120V						
WHCA-120-0043	42.77' (13.04m)	120	28.8	500	4.17	2.4 (1.1 kg)
WHCA-120-0063	62.78' (19.14m)	120	19.2	750	6.25	3.3 (1.5 kg)
WHCA-120-0086	85.54' (26.07m)	120	14.4	1,000	8.33	4.3 (1.9 kg)
WHCA-120-0126	125.56' (38.27m)	120	9.6	1,500	12.50	6.0 (2.7 kg)
WHCA-120-0188	188.34' (57.41m)	120	6.4	2,250	18.75	8.8 (4.0 kg)
240V						
WHCA-240-0086	85.54' (26.07m)	240	57.6	1,000	4.17	4.3 (1.9 kg)
WHCA-240-0128	128.31' (39.11m)	240	38.4	1,500	6.25	6.1 (2.8 kg)
WHCA-240-0171	171.08' (52.15m)	240	28.8	2,000	8.33	8.0 (3.6 kg)
WHCA-240-0188	188.34' (57.41m)	240	25.6	2,250	9.38	8.8 (4.0 kg)
WHCA-240-0251	251.12' (76.54m)	240	19.2	3,000	12.50	11.5 (5.2 kg)
WHCA-240-0342	342.17' (104.29m)	240	14.4	4,000	16.67	15.5 (7.2 kg)
WHCA-240-0377	376.68' (114.81m)	240	12.8	4,500	18.75	17.1 (7.8 kg)
WHCA-240-0428	427.71' (130.37m)	240	11.5	5,000	20.87	19.3 (8.8 kg)

*Shipping weights may vary

ORDERING INFORMATION

Identify the length and voltage of cable required and order the corresponding part number listed on the chart above.

LIMITED WARRANTY

WarmlyYours 10-year limited warranty covering defects in workmanship and materials applies. WarmlyYours limited warranty requires the product to be installed by a qualified person, in accordance with WarmlyYours installation guidelines, and only in applications approved by WarmlyYours, as stated in this document. Contact your Account Manager for complete warranty information.

This document is the property of WarmlyYours. Subject to change without notice.