


Surface Canopy



Shown approx. 30% actual size.

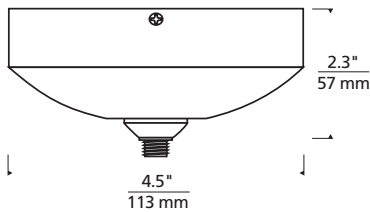

fj_surface_can_spec.pdf

DESCRIPTION

Surface Canopy with one FreeJack port. Use in conjunction with any FreeJack element to create a decorative ceiling fixture. 12 or 24 volt, 75 watt electronic transformer inside 2" high, 4.5" diameter housing. Each FreeJack element can be used up to its specified wattage (see element and accessory for details).

INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). Transformer (included) fits in canopy. For ceiling or wall. If wall mounting, head should be no longer than 6".

FINISH

Antique bronze, chrome, satin nickel, black, white.

REQUIRED USAGE

Any 12 or 24 Volt FreeJack pendant or head (sold separately).

DIMMING

120V IN/12V OUT and 120V IN/24V OUT dimmable with a standard incandescent dimmer (not included). 277V IN/12V OUT dimmable with a compatible dimmer (not included).

WEIGHT

1.00 lb./0.45 kg. ±

ORDERING INFORMATION

700FJSF4	FINISH	VOLTAGE
	Z ANTIQUE BRONZE	120V IN/12V OUT
	C CHROME	024 120V IN/24V OUT
	S SATIN NICKEL	277 277V IN/12V OUT
	B BLACK	
	W WHITE	



7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500

www.techlighting.com

700FJSF4 _____

FIXTURE TYPE: _____

JOB NAME: _____

