

MK-557-33

FEATURES



Left model as shown

- ❖ Factory tested
- ❖ Available in Black and White
- ❖ Left / Right Models Available
- ❖ Polished Finish
- ❖ FM Radio
- ❖ Auxiliary RCA input
- ❖ Steam Aromatherapy Cup
- ❖ Accessory Rack & Mirror
- ❖ Foot Massage
- ❖ Body Massage Jets
- ❖ Rainfall Shower
- ❖ Hand-held Shower w/Height-adjustable Bracket
- ❖ Tempered Glass
- ❖ Molded seat
- ❖ Head Rest
- ❖ Adjustable Steam Time & Temperature Settings
- ❖ Control Panel with Remote
- ❖ Sliding Doors
- ❖ Circulation Fan
- ❖ Mood lighting
- ❖ Interior Access Panel
- ❖ Removable Skirt for easy access
- ❖ 3kW Self-Cleaning Steam Generator
- ❖ Whirlpool Tub
- ❖ Tub Filler
- ❖ Underwater Lighting
- ❖ Pressure Balance Valve (optional extra)
- ❖ FM Transmitter (optional extra)

TECHNICAL INFORMATION

- **Materials:** Acrylic, Tempered Glass
- **Power Supply:**
 - **Steam Box:** 220V
 - **Water Pump:** 110v
- **Steam Ready:** 2-5 MIN
- **Dimensions:** 59 x 28 (33) x 86.5 IN

ELECTRICAL INFORMATION

- **Steam box -220V** / 13.6 amps - 1 dedicated 12-2 wire (line 1, line 2, and ground) 220 volt, 20 amp GFCI breaker/ (*Dedicated line for steam box only.*)
- **Water pump** (2nd dedicated line needed for pump)
 - **110 volt-** .75 KW/ 7 amps / 12-2 wire with 110 volt- 20 amp GFCI breaker
 - Inline Heater System requires one 12.5amp, 120V service that is GFCI protected (may plug into existing 110v circuit)


PLUMBING REQUIRMENTS

- The unit is equipped with hot and cold, metal braided 1/2 inch water supply hose with 1/2 national pipe thread.
- Need to install hot and cold shutoffs with 1/2 -male national pipe thread (not included).
- Supply hoses are to connect from the faucet manifold on the unit to the shutoff valves.
- All water jet features are pre-plumbed with reinforced braided flexible supply hose
 - **Note:** All fixtures and fittings must be checked for tightness and leaks as they may have loosened during transport. It is advised to have tub onsite before preparing drain location.
- **Note:** The flexible drain hose included with this unit is for installation into a floor drain only. Substituting the existing drain setup for a setup of the installers' choice will not void the warranty of the unit as long as there is no evidence of misuse or damage to the base. If the substitute drain system is used, a 3/8 in stub must be added to the main shower drain line to connect the steam generator's automatic flushing drainage hose.
Please call the manufacturer for updated drain info 1-866-STEAM-61

GENERAL INFORMATION

- Units come broken down in panels and are assembled with screws, nuts and bolts on site. All joints & seams to be caulked with 100% silicone at room temperature (no latex caulking)
- **Note:** Tub needs to be leveled in its final resting position, mark the placement, then pull tub out and begin assembly of wall panels. Glass piece on the front of bathtub is fixed and does not open. It is advised to have tub onsite before preparing drain location.
- Access panel near controls panel and jets recommended.
- **Manufacturer reserves the right to change specs or features at anytime. Please check to confirm details. 1-866-783-2661.**

MK-557/33-L

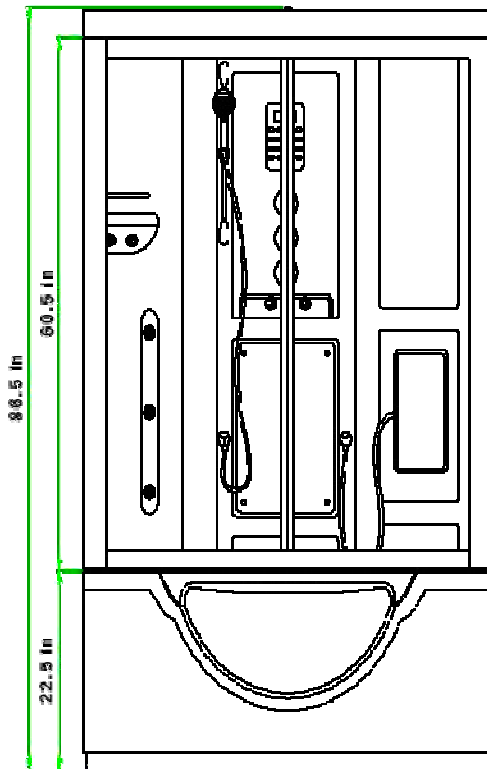

MK-557/33-R

