


Made In The USA

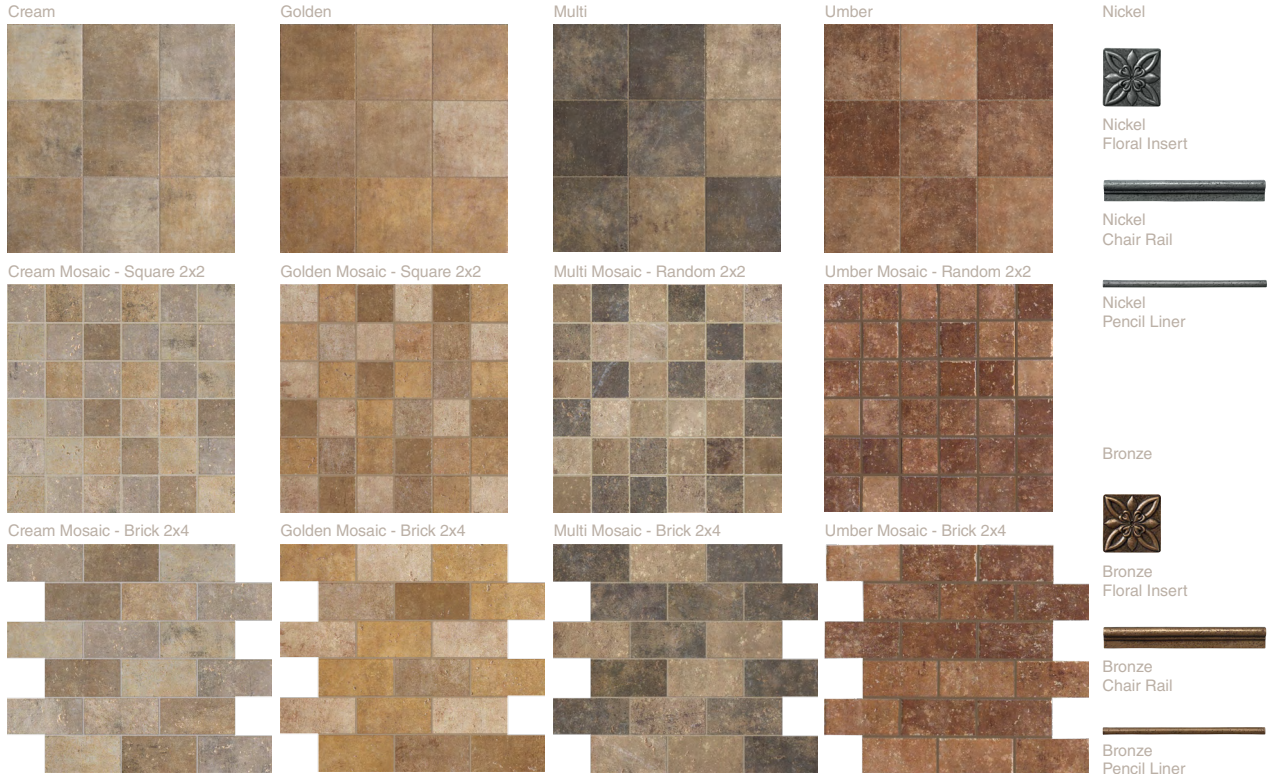

Contributes to LEED Credits **made in the USA**

	MODULAR TILE					FLOOR TILE DECOS					TRIMS				
Thickness	6 1/2" x 6 1/2" (16.5x16.5 cm) 5/16" (8.5mm)	13" x 13" (33.3x33.3 cm) 5/16" (8.5mm)	20" x 20" (50x50 cm) 7/16" (11mm)	13" x 13" (33.3x33.3 cm) Mosaic - Square 2"x2"	13" x 13" (33.3x33.3 cm) Mosaic - Brick 2"x4"	1" x 1" Floral Insert	2" x 2" (5x5 cm) Floral Insert	4" x 4" (10x10 cm) Floral Insert	6" x 13" (15x33.3 cm) Sanitary Cove Base**	1" x 6" (2.5x15 cm) Sanitary Cove Base In Angle**	1" x 6" (2.5x15 cm) Sanitary Cove Base Out Angle**	1/2" x 13" (1.25x33.3 cm) Pencil Liner	2" x 13" (5x33.3 cm) Sink Rail**	3" x 13" (8x33.3 cm) Bulbnose	
Names (colors)	UJ3W	UJ3U	UJ3V	UJ34	UJ35				UJ3Z	UJ32	UJ33			UJ3Y	
Cream (cream)	UHDQ	UHC3	UHC6	UHD4	UHD7				UHDZ	UJ2B	UJ2E			UHDW	
Golden (gold)	UHDR	UHC4	UHC7	UHD5	UHD8				UHD2	UJ2C	UJ2F			UHDX	
Multi (multi color)	UHDP	UHC2	UHC5	UHD3	UHD6				UHDY	UJ2A	UJ2D			UHDV	
Nickel						UJ6Y	UJ6W	UJ6U				UJ6Q	UJ6N		
Bronze						UJ6Z	UJ6X	UJ6V				UJ6R	UJ6P		

Notes: * Trim is available in all colors and made to complement Modular and Floor Tile. ** Suggested for interior applications only.

ASTM Test Results

Technical Characteristics	ANSI Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	7	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 429 lbf.	C648
Facial Dimension	-3.0% < Nominal ≤ 2.0%	Within Standard	C499
Nominal Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only) ¹	As Reported	Minimum 0.42	DCOF AcuTest SM *
SCOF-Static Coefficient of Friction (Dry)	As Reported	0.70 ≤ S.C.O.F. < 0.80	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	0.60 ≤ S.C.O.F. < 0.70	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378



¹ Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF AcuTest test method and values.

* DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

** Whichever is less