




WIRING DEVICES


Rectangular Indicator Pilot Lamp



250VAC Incandescent

Cat No.	Color	Bag Qty	Each
70310	Green	10	
70311	Red	10	
70312	Amber	10	

Round Indicator Pilot Lamp Incandescent

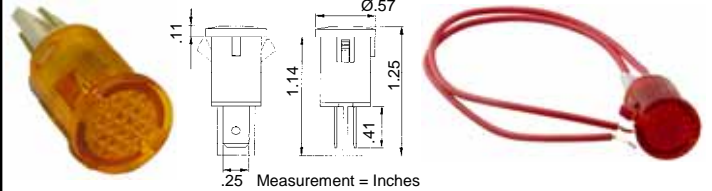

Cat No.	Color	Ratings	Termination Style	Bag Qty	Each
70320	Green	250VAC	Spade	10	
70321	Red	250VAC	Spade	10	
70322	Amber	250VAC	Spade	10	
70323	Green	125VAC	6" Wire Leads	10	
70324	Red	125VAC	6" Wire Leads	10	
70325	Amber	125VAC	6" Wire Leads	10	
70326	Green	24VDC	6" Wire Leads	10	
70327	Red	24VDC	6" Wire Leads	10	
70328	Amber	24VDC	6" Wire Leads	10	

Major Appliance Air Conditioner Cords



- 15A 120 Volt Parallel Blades
- 14/3 SPT-3 Cord w/ground
- Beige Color



Cat No.	Length	Box Qty	Each
89212	3'	24	
89214	6'	24	
89216	9'	12	
89218	12'	12	
89220	15'	12	

3 Outlet Heavy Duty T-Tap Extension Cord



- 2 Foot Length, Orange Color
- 15 Amp-125 Volt, 12/3 STW Cord
- Approved Under OSHA Standards For Outdoor and Indoor Use

Cat No.	Length	Box Qty	Each
89312	2'	12	

3 Outlet Power Adapter



- 15A/125V
- Converts Single Grounded Outlet to Provide Three Grounded Outlets
- Unbreakable Hard Rubber Material

Cat No.	Case Qty	Each
89412	144	

Lightning Arrester / Surge Suppressor



#89112



#89114



- Protects residential and small commercial panelboards, industrial pumps, motors, air conditioning disconnects, utility meter cans, transformers, weather heads, light poles, plus many more applications
- Weatherproof - can be used outdoors

- Model 89114 has indicator light that shows surge protection is present, ground present and power on
- Installs at electrical panel, electrical disconnect
- cULus Listed, ANSI/IEEE C62.11
- Hardwire parallel connection
- Unlimited (Parallel Installation) continuous current
- Response Time: <5 nSec Installed, <1 nSec component level
- MCOV: 130 VAC (L - G), 260 VAC (L - L)
- Operating Frequency: 0 - 400 Hz
- AC protection Modes: L - L & L - G
- Service Voltage: 120/240 VAC Single Phase
- Black high impact plastic housing
- Housing size: 3" x 2.25" x .75"

Cat No.	Indicator Light	Surge Current	Max Energy Dissipation	Case Qty	Each
89112	No	50,000 A.	420 Joules	48	
89114	Yes	100,000 A.	840 Joules	48	