


# Tex-Tile<sup>™</sup> Velvet 18"x18"

## **AVAILABLE SIZES**

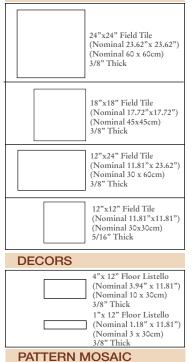

9" x 18" Pattern Mosaic (Nominal 8.70" x 17.72") (Nominal 22 x 45cm)


3/8" Thick

## SUGGESTED PATTERNS

18"x18"	18"x18"	18"x18"		
18"x18"	18"x18"	18"x18"		
18"x18"	18"x18"	18"x18"		
Grid				



# Offset



#### Diamond

### **COLOR SHADE VARIATION**



Variations in color, shade, and texture are inherent in ceramic tile. Several pieces should be examined collectively prior to installation.

Grout Joint Recommendation: Approximately 3/16"

### **APPLICATION**

Appropriate for interior and exterior floors and walls in freezing and nonfreezing temperatures. Porcelain tile floors, like other types of glazed floors, can become slippery when wet. Take extra care when selecting a floor product that will be exposed to conditions such as liquids, grease, or oil. Always follow proper installation methods.

### **TECHNICAL SPECIFICATIONS**

	TEST NAME	ASTM TEST	TEST RESULTS	
Ô	Abrasion Resistance	ASTM C-1027	v	
	Breaking Strength	ASTM C-648	≥ 250 lbs.	
Ó	Chemical Resistance	ASTM C-650	Resistant	
×	Coefficient of Friction	ASTM C-1028	Dry Neolite 0.67 Wet Neolite 0.69	
蓉	Frost Resistance	ASTM C-1026	Resistant	
$\bigcirc$	Scratch Hardness	MOHS SCALE	6	
	Water Absorption	ASTM C-373	.34%	

This unique series artfully captures the texture of finely woven linen in glazed through-body porcelain. The combination of straight edging and fashionable colors - Cotton, Linen, Velvet, and Wool - achieves a modern look.

Tex-Tile<sup>™</sup> comes in four sizes including a 24" x 24" and 12" x 24" along with four decorative borders and a distinct pattern mosaic. The design possibilities are endless.

Tex-Tile<sup>™</sup> is LEED certified and has a presence of at least 20% pre-consumer recycled content including mud and rejected unfired material.

DECORS













Wool 18" x18"



Wool 12"x12"



WWW.EMSER.COM

**FLOOR TILE**