

INSTALLATION INSTRUCTIONS FOR 8522-64

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

ASSEMBLING THE FIXTURE (Fig.2)

1. Raise the finial base (N) to bottom of the fixture body (H), aligning the hole with the pipe nipple and screw it with the lower finial (O).
2. Place the trim (J) over the glass shade (K) until it rests on the lip of the glass shade (K). Carefully lift the glass shade (K) and the trim (J) onto the socket (I) of the fixture body (H) and then secure it in place with the collar ring (L) and the check ring (M), tighten securely.

HANGING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Thread end of nipple (C) into crossbar (D).
4. Place lock washer (B) over end of nipple protruding from crossbar and thread hex nut (A) onto nipple until tight.
5. Take this crossbar assembly and mount to ceiling junction box with junction box screws (E). Tighten screws securely with screwdriver. The side of the crossbar marked "GND" must face out.

CONNECTING THE WIRES (Fig.3)

1. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. NOTE: Twist wires together in the same direction you twist the wire connector onto wires.
3. If your junction box has a grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as step 1. If junction box has no ground wire, attach the bare copper fixture wire to the green ground screw on the crossbar.
4. Tuck these wire connections neatly into the ceiling outlet box and then raise the fixture canopy all the way to the ceiling.
5. Place the fixture canopy (F) over the nipple (C), and then tighten it with the ball nut (G).
6. Install the light bulbs in accordance with the fixture specifications **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**

Your installation is now complete Return power to the junction box and test the fixture.

Fig.1

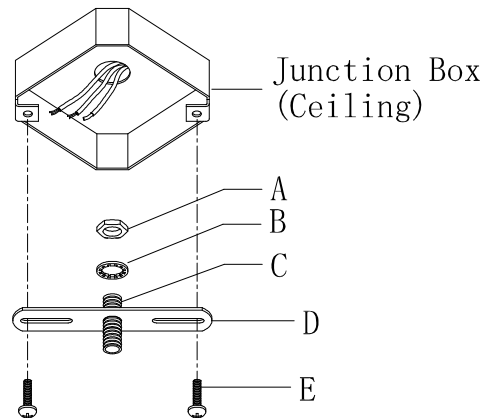


Fig.2

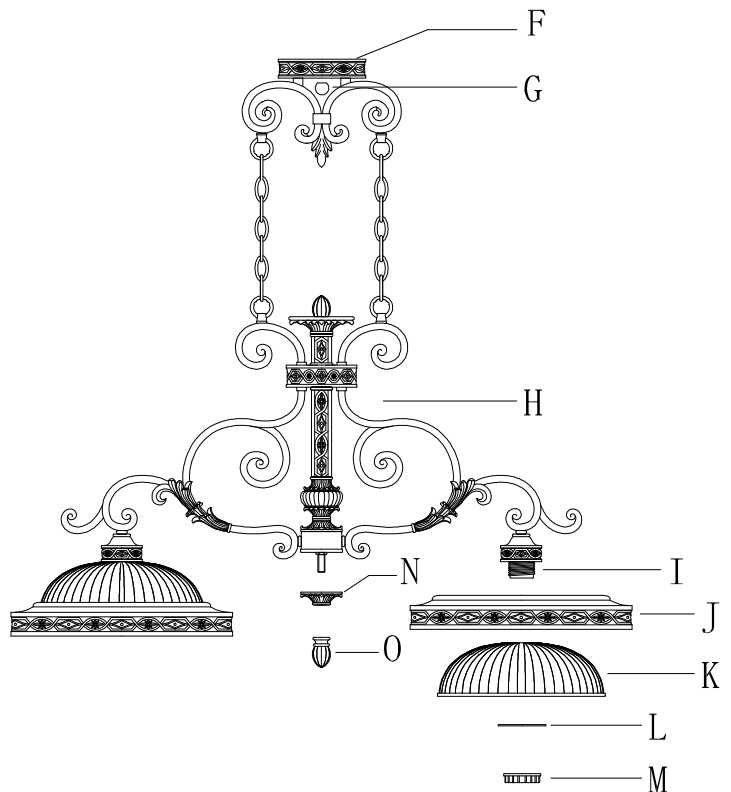





Fig.3

| | | | | | |
|--|------------------------------------|--|--|---|--|
| <p>FIXTURE WIRES Black or Smooth</p>  | <p>HOUSE WIRES Black (Hot)</p> | <p>FIXTURE WIRES White or Ribbed</p>  | <p>HOUSE WIRES White (Neutral)</p> | <p>FIXTURE WIRES Bare Copper (Ground)</p>  | <p>HOUSE WIRES Green or Bare Copper (Ground)</p> |
|--|------------------------------------|--|--|---|--|

UL
Listed

Livex Lighting