


# INSTRUCTIONS: Model: QP-902 Pendant Socket Set

Read all instructions before installing.  
Disconnect power before installing or re-lamping.

**Overview:** Pendant sockets sets are designed for use with all WAC quick connect adapters. They may also be used on other manufacturers brand of quick connect (consult factory for compatibility). Pendants may be mounted to monorail, monopoints, line volt flexible track or standard line volt track, by coupling to a low voltage quick connect adapter. Sockets are supplied with a 6' cable and may be field cut to desired length.

## Installing Lamp & Shade:

1. Insert lamp 12V 50W max. bi-pin Xenon, (not tungsten halogen) into the socket (supplied with 12V, a 24 volt lamp may also be used with appropriate power supply).
2. Remove the quick connector adapter (see shortening pendant).
3. The small collar travels any where along the length of the socket shaft and is secured by a setscrew. This allows varying lamp positions inside the shade. Set the collar to a desired height.
4. Lower the shade until it rests on the finial.
5. Re-install the quick connect adapter. If shortening the pendant do this before re installing (see shortening pendant).

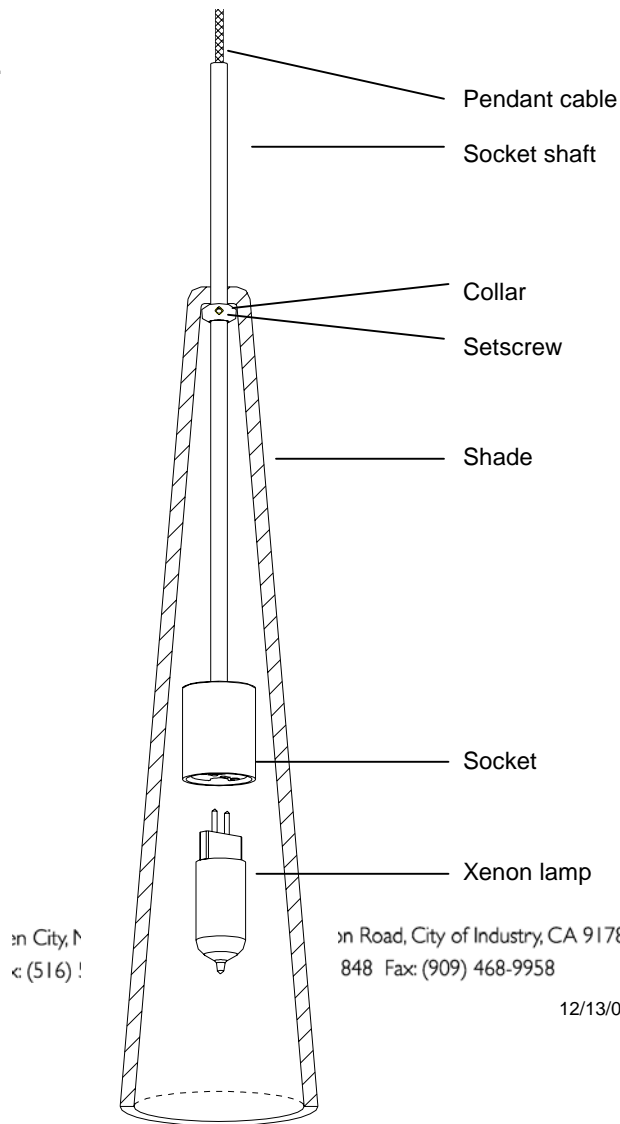


168 Brea Canyon Road, City of Industry, CA 91789  
848 Fax: (909) 468-9958

12/13/02 REV 1

## Installing Pendant to Quick Connect:

1. Insert the post of the quick connect into the quick connect adapter.
2. Thread the top half of the conical section until it seats with the adapter.
3. Adjust fixture position, use caution not to loosen the conical section.

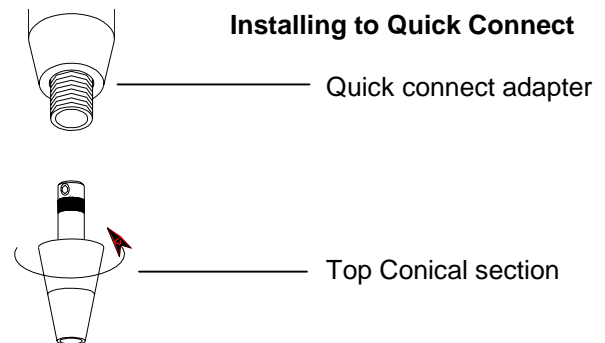

**Accessories:** series G913, G914, G915, and G918 glass shades.

See reverse for field shortening pendants.



W • A • C | LIGHTING

www.waclighting.com

615 South Street, Garden City, NY 11530  
Tel: (516) 515-5000 Fax: (516) 516-5050

168 Brea Canyon Road, City of Industry, CA 91789  
Tel: (909) 468-1848 Fax: (909) 468-9958

12/13/02 REV 1

### To Shorten Pendant:

All Pendant shades use the quick connect adapter to attach to the rail. To shorten a pendant fixture the quick connect adapter can be removed from the coaxial cable, the cable can be cut to size. The coaxial cable also needs to be removed to install glass shades with holes too small for the sockets to pass through. Follow the step-by-step instructions below.

