

Glo-Ball S - Specification Sheet by Jasper Morrison, 1998

Mounting

Lamp (Bulb) Description 1 x 42W PL G24Q-4 Fluorescent

Environment Indoor - Dry Location

Finish Opal

Technical and Product Description GLO-BALL S pendant lamp providing diffused light. Diffuser consisting of an externally

acid-etched, hand blown, flashed opaline glass. Transparent, injection molded polycarbonate diffuser support. 30% fiberglass reinforced injection-molded polyamide


rose; pressed and galvanized ceiling fitting. Steel suspension cable.

Electrical

Voltage 120 Switching NA

Physical


Cord Length (inches)192Construction MaterialGlassWeight12 lbs

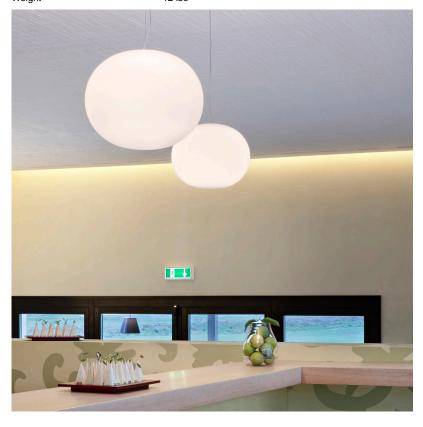



FU301161 Opal

Dimensional Image



Certifications



Lamping (Bulb)



42W PL G24Q-4 Fluorescent