


25-500-B30-V

Temptrol II™ (2000 Series) Pressure Balancing mixing valve with built-in choke and adjustable stop screw to limit handle turn. Lever diverter with integral volume control. Clear-Flo shower head with arm and flange. Wall/hand shower with in-line vacuum breaker, flexible 5' metal hose, wall connection and flange. 30" slide bar for hand shower mounting.

Suffix Suffix X: Integral service stops—allows water shut-off at valve for service

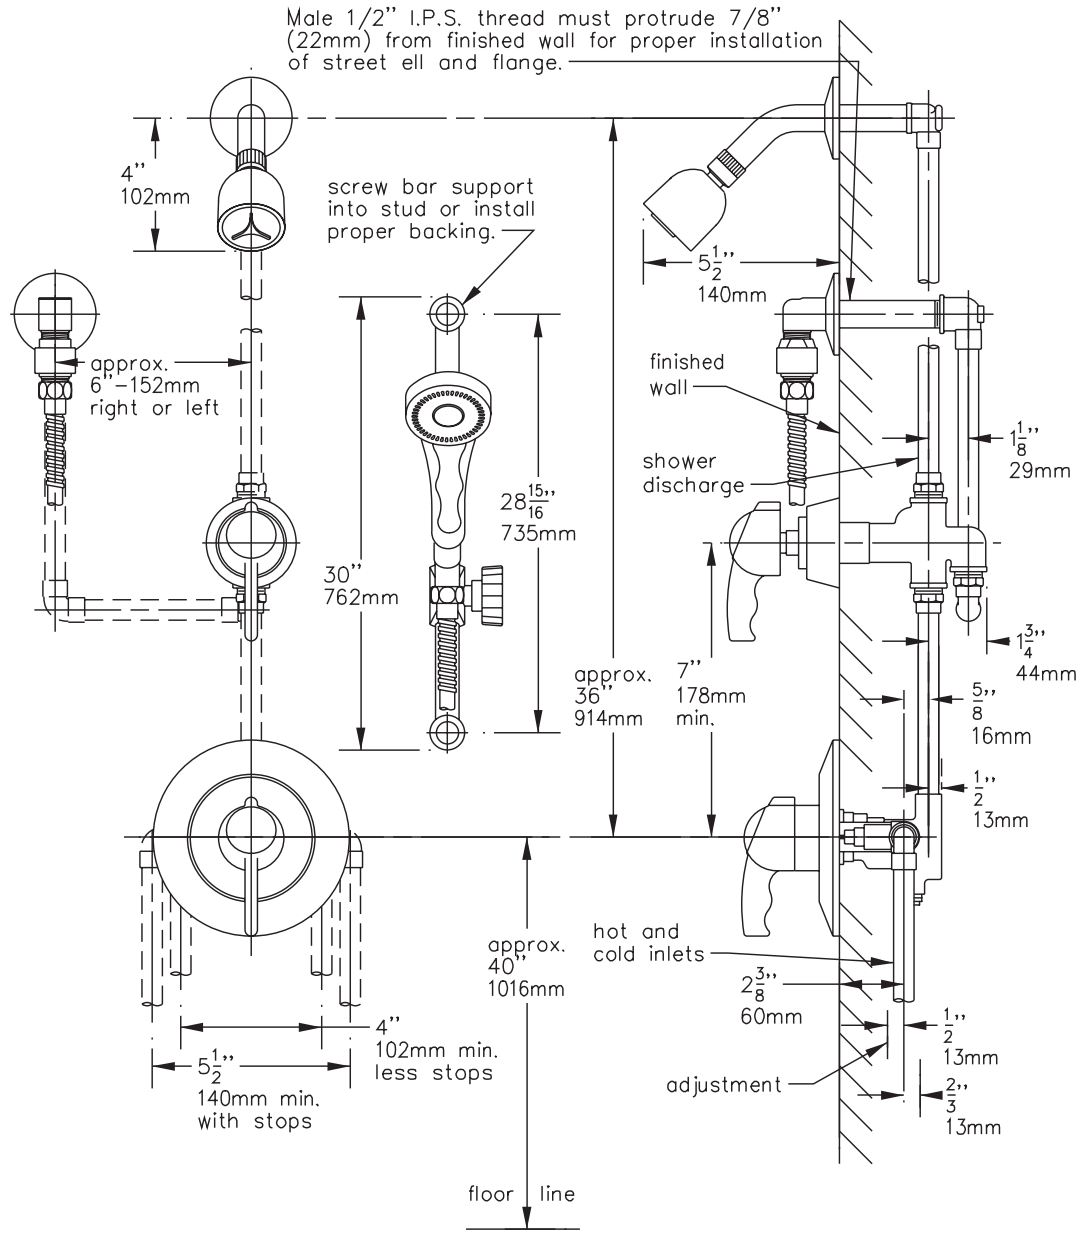

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. **Dimensions are for ADA compliance (Americans with Disabilities Act)** consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons® INDUSTRIES, INC.

31 Brooks Drive, Braintree, MA 02184-3804

Tel: 1-800-SYMMONS, (781) 848-2250 Fax: 1-800-961-9621, (781) 843-3849

Web site: www.symmons.com © 2004 Symmons Industries, Inc. 072204