

GP6500

GP SERIES Commercial/Residential Portable Generators

Features

- **The Generac OHV engine** incorporates splash lubrication and provides long life.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Hardened 1 1/4" steel tube cradle** for added strength and durability.
- **Hour Meter** tracks usage for proper service intervals.
- **Heavy-duty, never flat wheels** for reliable portability.
- **Covered outlets** for added protection from the environment and rugged working conditions.

Models 5940-2 UPC: 696471059403 (EPA/49-State)


Model 5946-1 UPC: 696471059465 (EPA/CARB/California)

Model 5976-2 UPC: 696471059762 (EPA/49-State/CSA/Canada)



AC Rated Output Running Watts 6500
AC Maximum Output Starting Watts 8125

49-State Control Panel

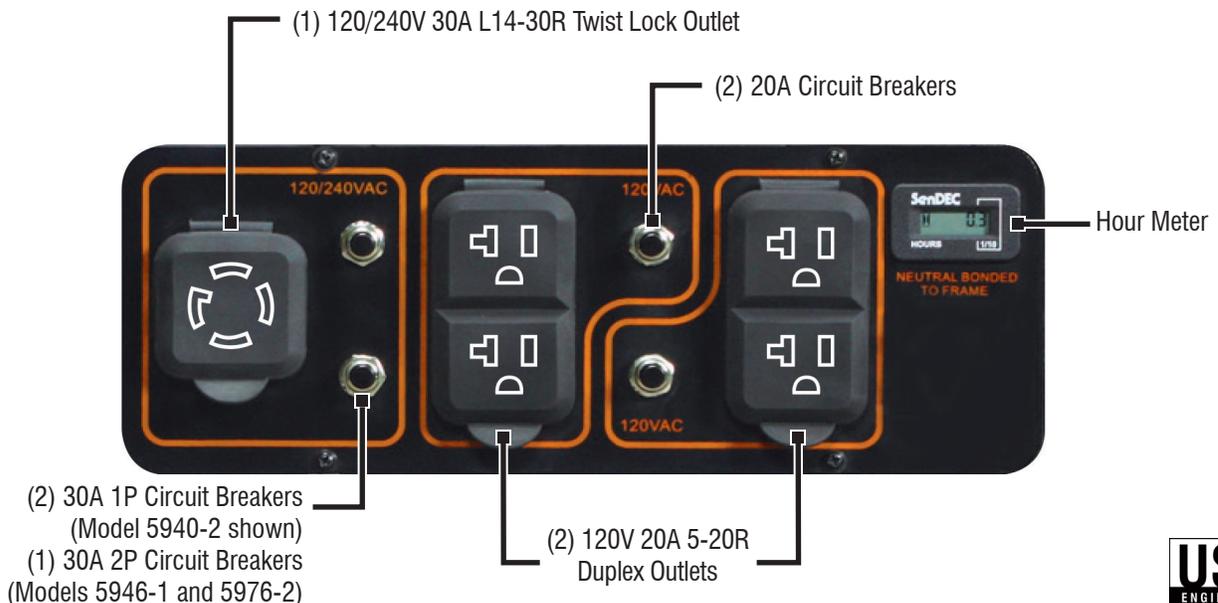

GP6500

specifications

| | |
|---|--|
| Product Series | GP6500 |
| Model (Configuration) | 5940-2 (EPA/49-State) 5976-2 (EPA/49-ST/CSA/Canada) 5946-1 (EPA/CARB/California) |
| AC Rated Output Running Watts: | 6500 |
| AC Maximum Output Motor Starting Watts: | 8125 |
| AC Voltage | 120/240 VAC |
| AC Frequency | 60 Hz |
| Rated VAC Amperage | 54.2/27.1 |
| Max Rated VAC Amperage | 67.8/33.9 |
| Engine Displacement | 389cc |
| Engine Type | OHV |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE30 |
| Lubrication Method | Splash |
| Choke Location | On Engine |
| Fuel Shut Off | On Fuel Tank |
| Starting Method | Recoil Pull Start |
| Low Oil Shutdown Method | Low Level |
| Neutral Bonded to Ground | Yes |

| | |
|------------------------------|--------------------------|
| Start Switch Type | On/Off Switch |
| Switch Location | On Engine |
| Fuel Gauge | Built-In Tank |
| Fuel Tank Capacity Gal (Ltr) | 7.2 (27.3) |
| Run Time at 50% (Hours) | 10 |
| Handle Style | Single Folding / Locking |
| Wheel Type | 9.5" Solid Wheels |
| Maintenance Kit | Sold Separately |
| Warranty - Residential | 2 Year Ltd |
| Warranty - Commercial | 1 Year Ltd |

Dimensions and Weights

| | Model 5940-2 | Model 5946-1 | Model 5976-2 |
|--------------------------|--------------|--------------|--------------|
| Length in (mm) | 27.25 (692) | | |
| Width in (mm) | 27 (687) | | |
| Height in (mm) | 25 (638) | | |
| Extended Length in (mm) | 44.5 (1129) | | |
| Carton Length in (mm) | 31 (790) | | |
| Carton Width in (mm) | 21.5 (550) | | |
| Carton Height in (mm) | 23.25 (590) | | |
| Unit Weight lbs (kg) | 175 (79.3) | 177 (80.3) | 175 (79.3) |
| Shipping Weight lbs (kg) | 197.5 (89.6) | 200 (90.6) | 197.5 (89.6) |

