


Important: Always unplug the power cord before installing or replacing bulb and before cleaning or other maintenance.

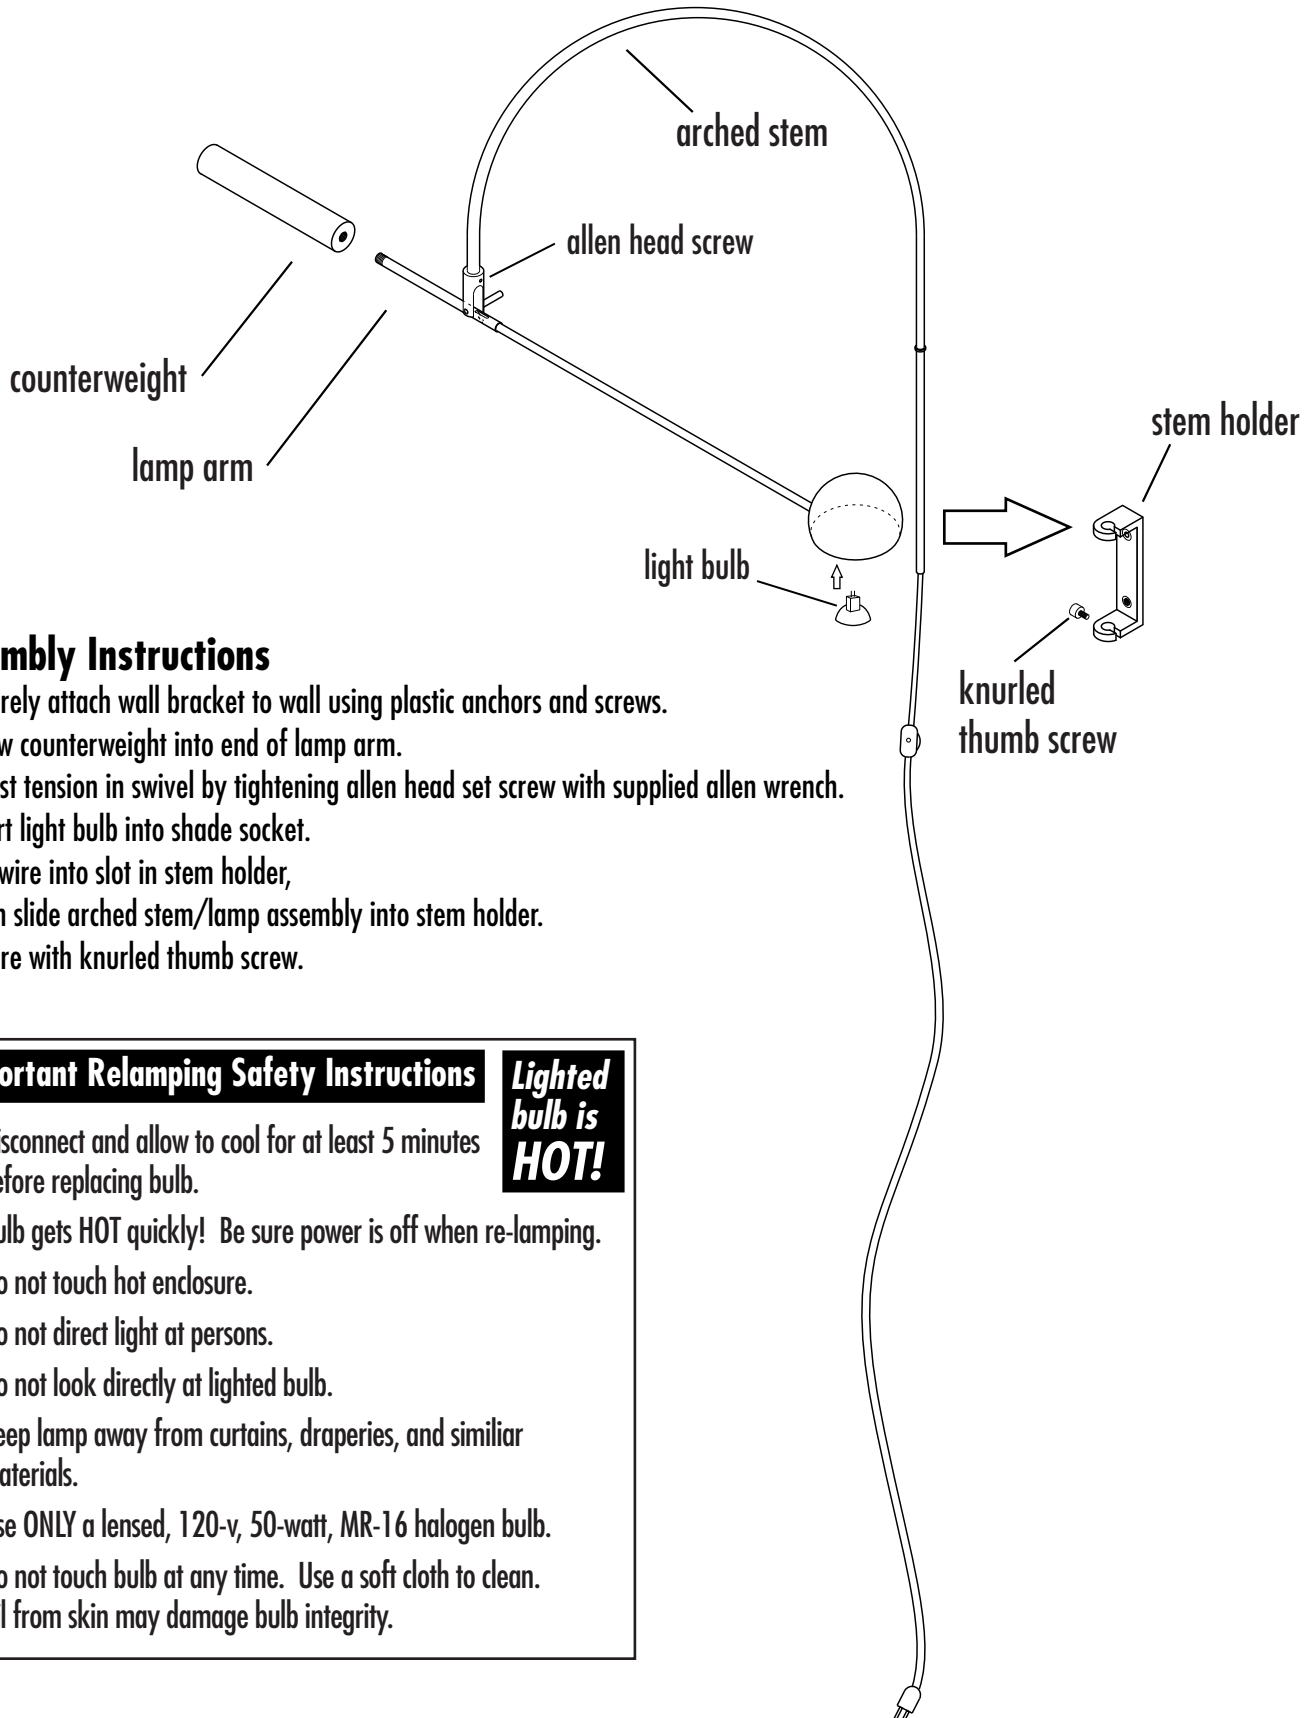

Assembly Instructions

1. Securely attach wall bracket to wall using plastic anchors and screws.
2. Screw counterweight into end of lamp arm.
3. Adjust tension in swivel by tightening allen head set screw with supplied allen wrench.
4. Insert light bulb into shade socket.
5. Slip wire into slot in stem holder, then slide arched stem/lamp assembly into stem holder.
6. Secure with knurled thumb screw.

Important Relamping Safety Instructions

1. Disconnect and allow to cool for at least 5 minutes before replacing bulb.
2. Bulb gets **HOT** quickly! Be sure power is off when re-lamping.
3. Do not touch hot enclosure.
4. Do not direct light at persons.
5. Do not look directly at lighted bulb.
6. Keep lamp away from curtains, draperies, and similar materials.
7. Use **ONLY** a lensed, 120-v, 50-watt, MR-16 halogen bulb.
8. Do not touch bulb at any time. Use a soft cloth to clean. Oil from skin may damage bulb integrity.

**Lighted
bulb is
HOT!**