


Important: Always unplug the power cord before installing or replacing bulb and before cleaning or other maintenance.

This light should be installed by a licensed electrician

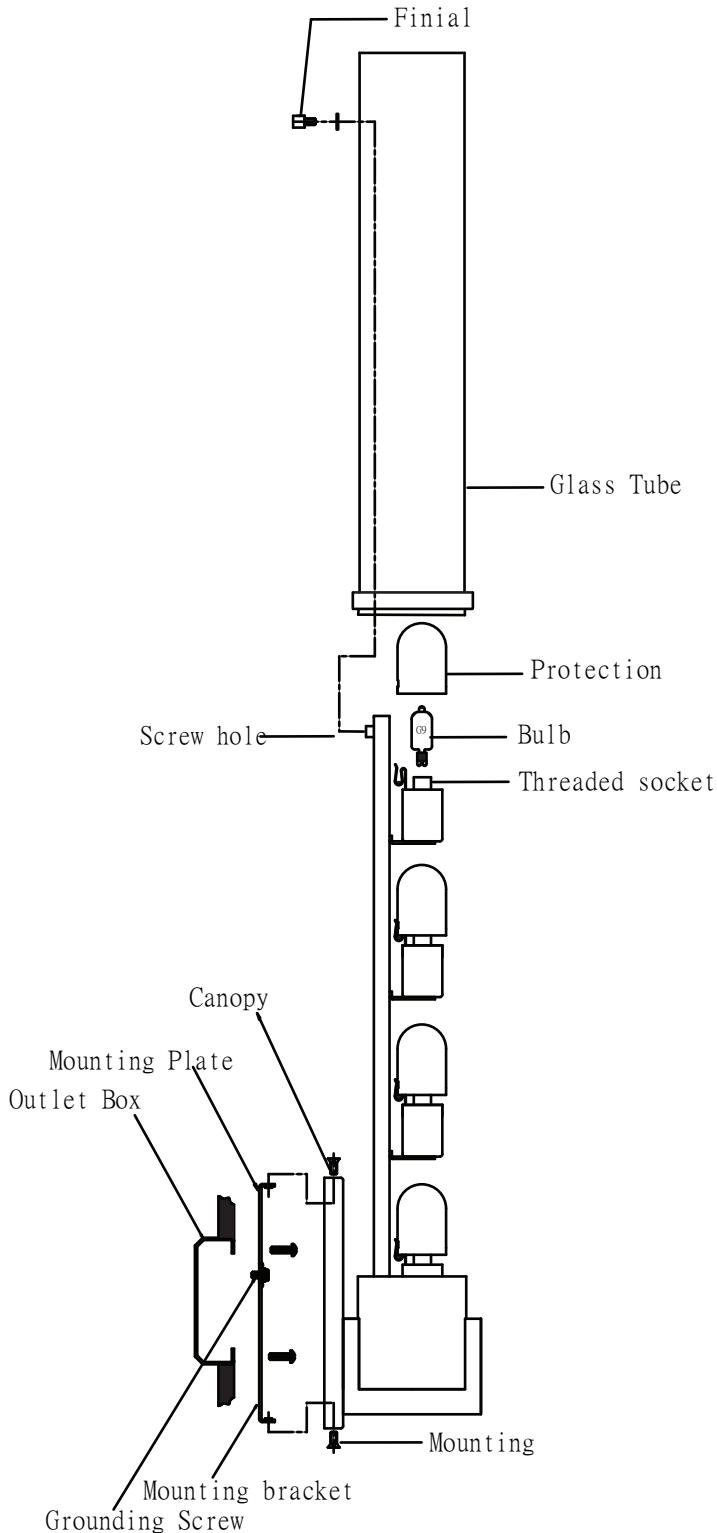

Assembly & Installation Instructions

1. Shut off power to outlet box.
2. Insert bulbs in socket **NOTE: DO NOT TOUCH THE GLASS PART OF THE BULB WITH BARE HANDS.** Oil from fingerprints will reduce life of the bulb.
3. Place protection glass over bulbs.
4. Align the holes of the glass tube with the screw hole and secure with finial. Do not overtighten - glass may crack.
5. Attach mounting plate to outlet box using outlet box screws. Note the four screw holes around the rim of the the mounting plate should align with the holes around the rim of the canopy.
6. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
7. Attach canopy to mounting plate with the four mounting screws.

Important Safety Instructions

Lighted lamp is HOT!

1. Disconnect and allow to cool for at least 5 minutes before replacing bulb.
2. Bulb gets **HOT** quickly! Be sure power is off when re-lamping.
3. Do not touch hot enclosure.
4. Do not direct light at persons.
5. Do not look directly at lighted bulb.
6. Keep lamp away from curtains, draperies, and similiar materials.
7. Use only a 120v, maximum 40watt , G9 base, xenon bulb.
8. Do not touch bulb at any time. Use a soft cloth to clean. Oil from skin may damage bulb integrity.
9. Do not operate the lamp with damaged or missing shield.
10. Damaged shields should be replaced before lamp is used.