
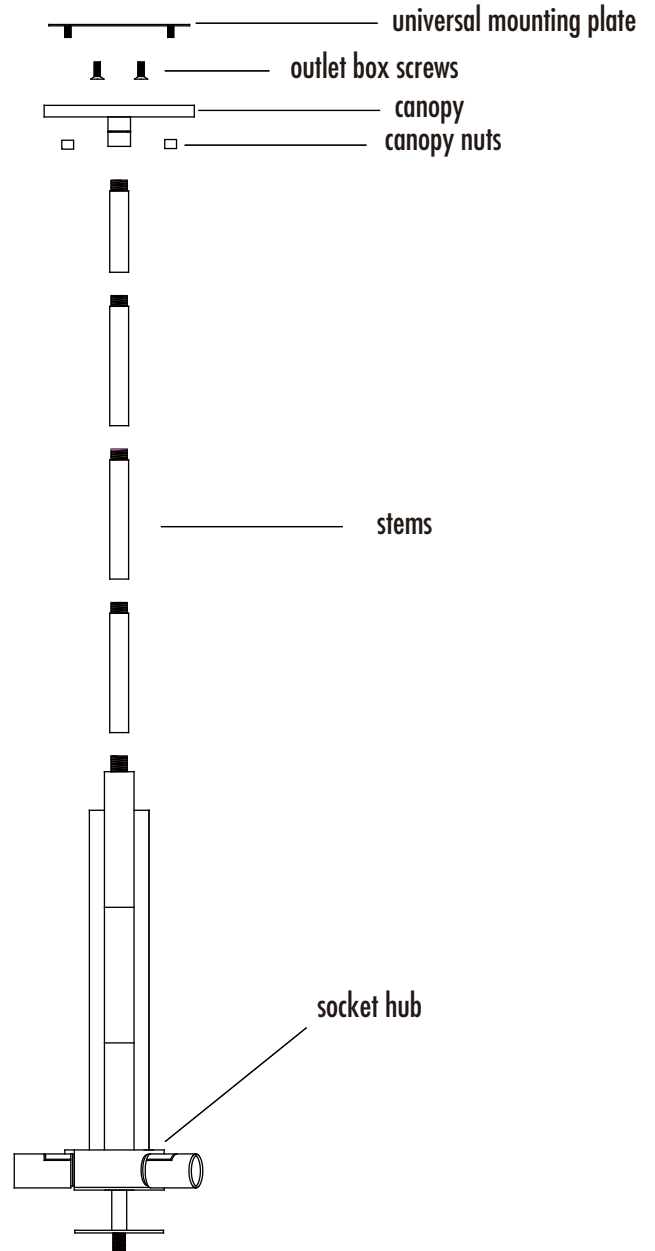


**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**


This light should be installed by a licensed electrician

### LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (Fig A.)
2. Attach the universal mounting plate to the outlet box using outlet box screws.
3. Determine the height which the fixture is to be hung. Screw together stems as needed to achieve desired length.
4. Make appropriate electrical connections using wire nuts. Using the existing copper wire to be connected to the J-box's green(ground) wire; existing black wire to be connected to the J-box's black wire; existing white wire to be connected to the J-box's white wire. If there is no green ground wire from the outlet box, then connect the fixture wire to the mounting plate with the green screw provided. Place connections in outlet box.
5. Attach canopy over outlet box with canopy nuts.
6. Install A19 bulbs (not included).
7. Place shade and glass diffuser under socket hub and secure with diffuser support plate.
8. Restore power to fixture.

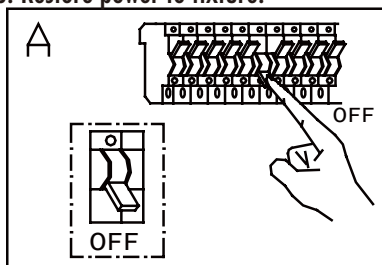

shade \_\_\_\_\_



glass diffuser \_\_\_\_\_

diffuser support plate \_\_\_\_\_

finial \_\_\_\_\_