

Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.

This light should be installed by a licensed electrician



LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box using outlet box screws, use anchors and mounting screws for extra support.
3. Determine the height at which the fixture is to be hung. Screw together stem sections to achieve desired length.
4. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
5. Attach canopy to mounting plate and secure with canopy screws.
6. Install medium base bulbs. (included Vintage Carbon Filament Bulb is optional)
7. Attach smaller glass to glass holder stem and use the set screw to hang the glass.
8. Attach larger glass and clear plastic washers to the threaded stems and tighten with metal caps.
9. Restore power to the fixture.

CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.

Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

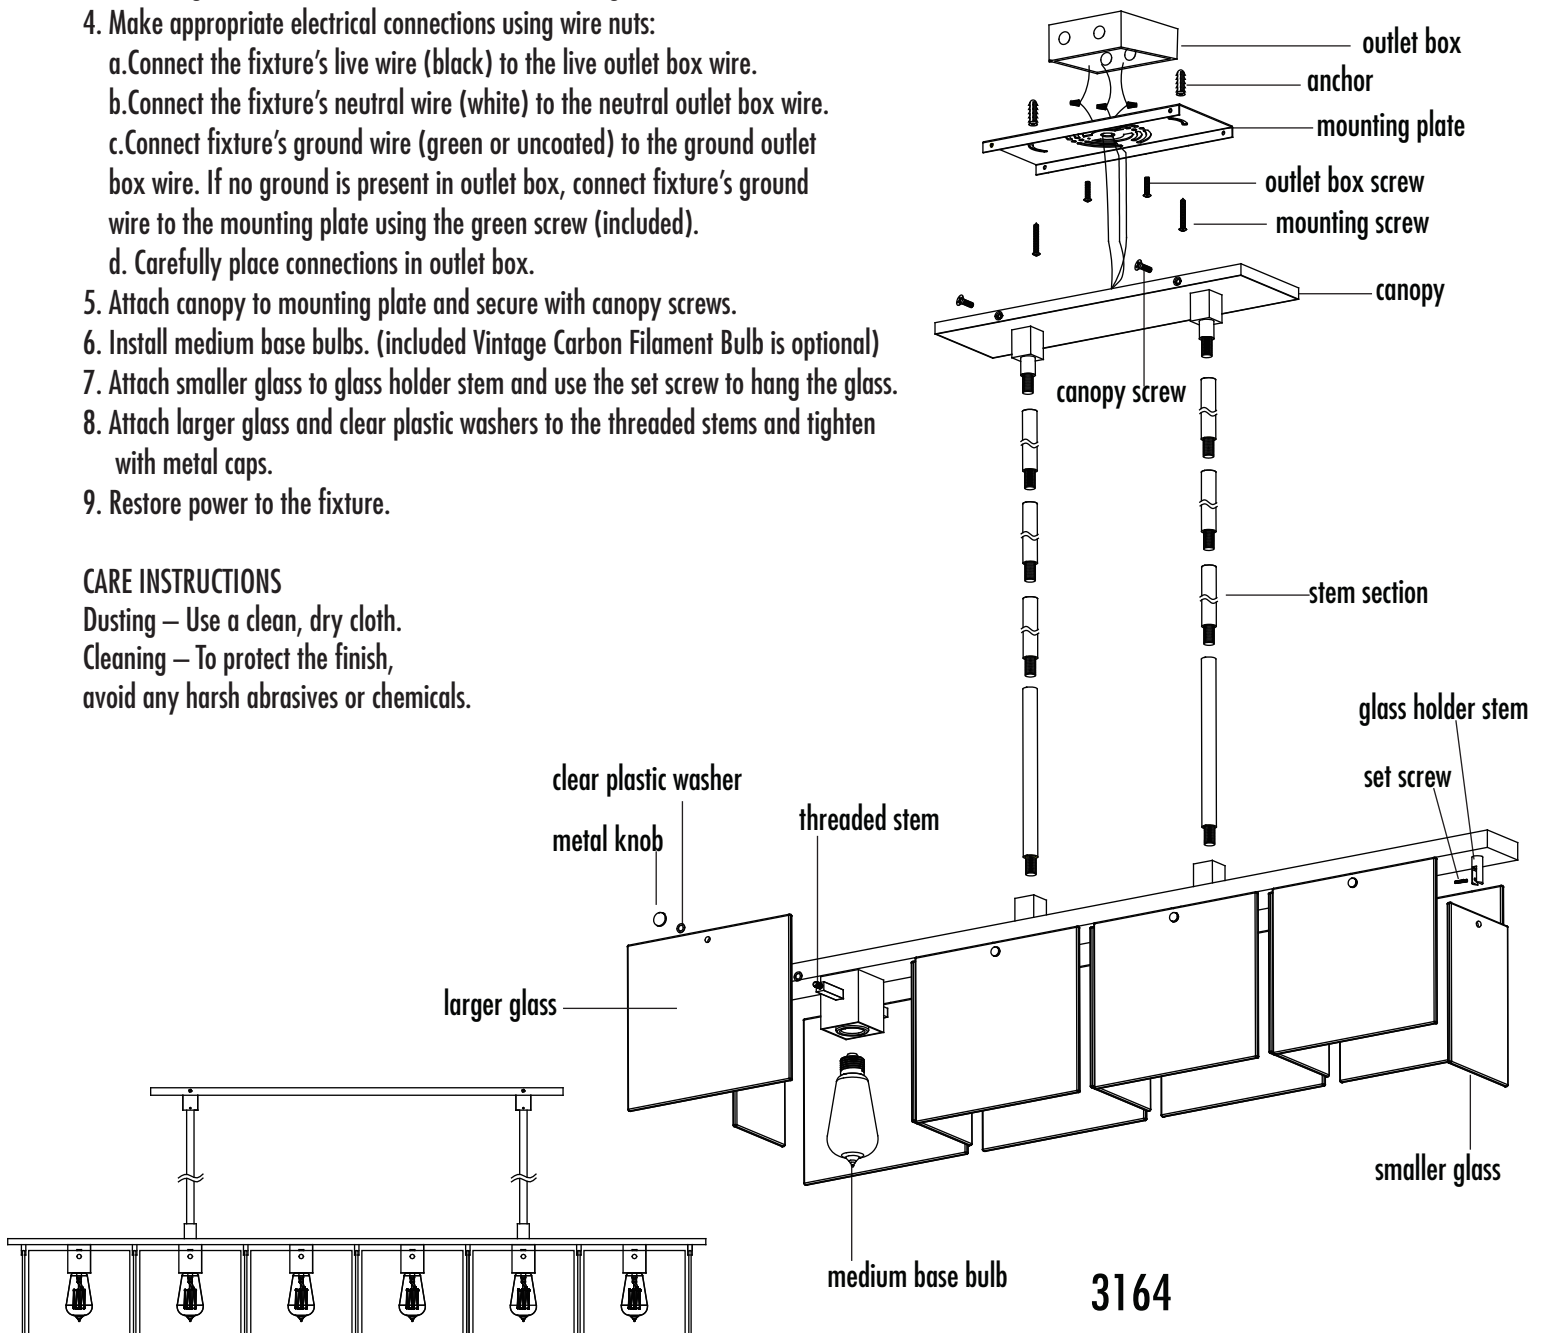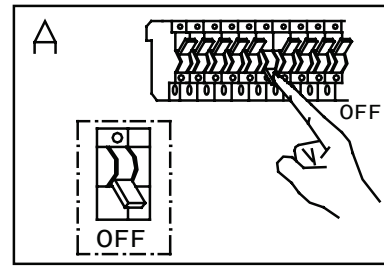

3166

3164