

A.O. SMITH CONSERVATIONIST®

Designed for use as a recovery heater having its own storage tank. Note: Not recommended for sanitizing water application.

FEATURES

GLASS-LINED TANK - Three sizes; 52, 80 and 119 gallon capacity. Tank interior is coated with glass specially developed by A.O. Smith Ceramic Research for water heater use. Tanks rated at 150 psi (1034 kPa) working pressure (ASME 150 psi). Foam insulation reduces costly heat loss, and is vermin proof.

ELEMENTS - Incoloy sheathing for longer life. Low watt density; means lower surface temperature to minimize scale buildup and more surface to heat water. Element sizes from 3 to 6 Kw. Use 3, 6 or 9 elements standard; total of 9 to 54 Kw input (see chart on back).

FUSING - Protects all elements, thermostats, and internal wiring circuits against excess current flow. Meets National Electric Code requirements that non-ASME tanks must have internal fusing when current draw exceeds 48 amps. requirements.

STANDARD VOLTAGES - 208, 240 and 480V single-phase and three-phase delta. Convertible from three-phase to single-phase (in field) and vice versa. 277V single-phase also available.

TERMINAL BLOCK - Factory installed. Just bring the service to the heater and connect to block.

CONTROLS - One temperature control (adjustable through a range of 120° to 180°F) and manual reset high temperature cutoff per element. Thermostat step control may be achieved by varying settings on individual temperature controls. Located behind hinged control compartment door for quick, easy access.

OTHER STANDARD FEATURES

- Simplified circuitry, color coded for ease of service
- Two anode rods for maximum corrosion protection
- Cabinet has bonderized undercoat with baked enamel finish
- Bottom inlet and top outlet openings
- Brass drain valve
- A.G.A./ ASME temperature and pressure relief valve
- Single panel control box.

OPTIONAL

- U.L listed conversion kits to correct some voltage and Kw requirements in the field before and after installation
- Manifold kits with gate valves - available for multiple installation
- ASME 150 psi tank construction
- International voltages - 380, 415 and 480 volts, three-phase available with Y connected elements
- Field conversion kits for voltage and Kw.

GOLDENROD ELEMENTS - All DRE models are available with the Goldenrod 24K gold plated elements (patent pending). Goldenrod elements provide long life and 6 times the scaling resistance of standard incoloy elements. Goldenrod elements carry a three-year warranty against failure due to lime scale build-up.

Dura-Power

COMMERCIAL ELECTRIC
WATER HEATERS
DRE-52, 80, 120

Meets or exceeds the requirements of ASHRAE 90.1b-1992 Standard for energy efficiencies.



ASME
(OPTIONAL)



LIMITED WARRANTY OUTLINE


If the tank should leak any time during the first three years, under the terms of the warranty, A.O. Smith will furnish a replacement heater; installation, labor, handling and local delivery extra. **THIS OUTLINE IS NOT A WARRANTY.**

For complete information, consult the written warranty or A. O. Smith Water Products Company.

RECOVERY CAPACITY IN GALLONS AT TEMPERATURE RISE OF

Standard kW Input	BTU/ Hour	30°F	40°F	50°F	60°F	70°F	80°F	90°F	100°F	110°F	120°F	130°F	140°F
		17°C	22°C	28°C	33°C	39°C	45°C	50°C	56°C	61°C	67°C	72°C	78°C
6	20,478	82	62	49	41	35	31	27	25	22	21	19	18
9	30,717	123	92	74	62	53	46	41	37	34	31	28	26
		465	349	279	233	199	174	155	140	127	116	107	100
12	40,956	164	123	98	82	70	61	55	49	45	41	38	35
		620	465	372	310	266	233	207	186	169	155	143	133
13.5	46,075	184	138	111	92	79	69	62	55	50	46	43	40
		698	523	419	349	299	262	233	209	190	174	161	150
15	51,195	205	154	123	102	88	77	68	61	56	51	47	44
		775	582	465	388	332	291	258	233	211	194	149	166
18	61,434	246	184	148	123	105	92	82	74	67	62	57	53
		930	698	558	465	399	349	310	279	254	233	215	199
24	81,912	328	246	197	164	140	123	109	98	90	82	76	70
		1241	930	744	620	532	465	414	372	338	310	286	266
27	92,151	369	276	221	185	158	138	123	111	101	92	85	79
		1396	1047	938	609	509	523	465	410	391	340	322	299
30	102,390	410	307	246	205	176	154	137	123	112	102	95	88
		1551	1163	930	775	665	582	517	465	423	388	358	332
36	122,868	492	369	295	246	211	184	164	148	134	123	113	105
		1861	1396	1117	930	798	698	620	556	508	465	429	399
40.5	138,226	554	418	332	277	237	208	185	166	151	138	128	119
		2094	1570	1256	1047	897	785	698	628	634	582	537	498
45	153,585	615	461	369	307	263	230	205	184	168	154	142	132
		2326	1745	1398	1163	997	872	755	698	634	582	537	498
54	184,302	738	554	443	359	316	277	246	221	201	185	170	158
		2791	2094	1675	1396	1196	1047	930	837	761	696	644	598

Figured at 1 KW (3413 BTU) = 4.1 Gallons at 100°F temperature rise.
NSF ratings may be obtained by multiplying the above figures by 0.98.

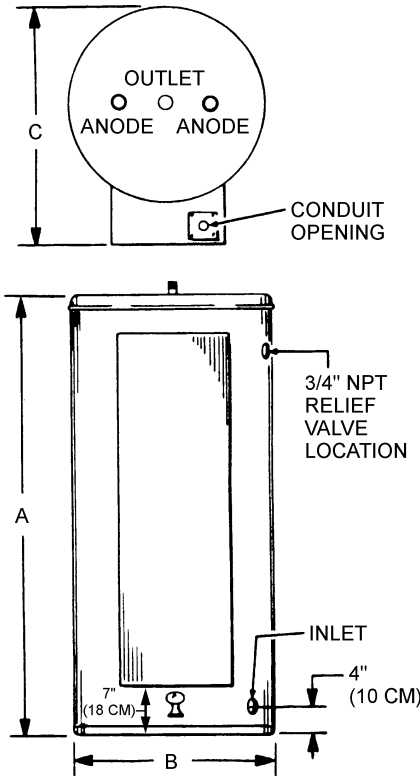

Model Number	Tank Capacity		Dimensions						Inlet/Outlet (NPT)		Approx. Ship. Wt. (Lbs.)	
			A		B		C					
	gal.	litre	in.	cm	in.	cm	in.	cm	in.	cm	lb	kg
DRE-52	50	189	55 1/4	140.3	21 3/4	55.2	27 1/4	69.2	1 1/4	3.2	265	120
DRE-80	80	300	59 1/2	151.1	25 1/4	64.1	31 1/4	79.4	1 1/4	3.2	280	127
DRE-120	119	450	62 1/4	158.1	29 1/2	75.0	35 3/4	90.8	1 1/4	3.2	390	177

KW Input	Model Numbers Tank Capacity in Gallons			Number Of Elements	Element Wattage	Full Load Current In Amperes							
	50	80	119			Single Phase				Three Phase			
						208V	240V	277V	480V	208V	240V	480V	600V
6	DRE-52-6	DRE-80-6	DRE-120-6	3	2,000	28.8	25.0	21.7	12.5	16.7	14.4	7.2	6.0
9	DRE-52-9	DRE-80-9	DRE-120-9	3	3,000	43.3	37.5	32.5	18.8	25.0	21.7	10.8	9.0
12	DRE-52-12	DRE-80-12	DRE-120-12	3	4,000	57.7	50.0	43.3	25.0	33.3	28.9	14.4	12.0
13.5	DRE-52-13.5	DRE-80-13.5	DRE-120-13.5	3	4,500	64.9	56.3	48.7	28.1	37.5	32.5	16.2	13.5
15	DRE-52-15	DRE-80-15	DRE-120-15	3	5,000	72.1	62.5	54.2	31.3	41.6	36.1	18.0	15.0
18	DRE-52-18	DRE-80-18	DRE-120-18	3*	6,000	86.5	75.0	65.0	37.5	50.0	43.3	21.7	18.0
24	DRE-52-24	DRE-80-24	DRE-120-24	6	4,000	115.4	100.0	86.6	50.0	66.6	57.7	28.9	24.0
27	DRE-52-27	DRE-80-27	DRE-120-27	6	4,500	129.8	112.5	97.5	56.3	74.9	65.0	32.5	27.0
30	DRE-52-30	DRE-80-30	DRE-120-30	6	5,000	144.2	125.0	108.3	62.5	83.3	72.2	36.1	30.0
36	DRE-52-36	DRE-80-36	DRE-120-36	6*	6,000	173.1	150.0	130.0	75.0	99.9	86.6	43.3	36.0
40.5	DRE-52-40.5	DRE-80-40.5	DRE-120-40.5	9	4,500	194.7	168.8	146.2	84.4	112.4	97.4	48.7	40.5
45	DRE-52-45	DRE-80-45	DRE-120-45	9	5,000	216.3	187.5	162.5	93.8	124.9	108.3	54.1	45.0
54	DRE-52-54	DRE-80-54	DRE-120-54	9	6,000	N/A	225.0	194.9	112.5	149.9	129.9	65.0	54.0

*208 volt models may contain three (3) additional elements.

SUGGESTED SPECIFICATIONS

The heater(s) shall be Dura-Power Commercial Electric Model Number _____ as manufactured by A.O. Smith or an approved equal. Heater(s) shall be rated at _____ KW, _____ volts, _____ phase, 60 cycle AC, and listed by Underwriters' Laboratories. Tank(s) shall be _____ gallon capacity. Heater(s) shall have 150 psi working pressure and be equipped with extruded high density anode. All internal surfaces of the heater(s) exposed to water shall be glass-lined with an alkaline borosilicate composition that has been fused-to-steel by firing at a temperature range of 1400°F to 1600°F. Electric heating elements shall be low watt density with incoloy sheath and 1" screw-in type. Each element shall be controlled by an individually mounted thermostat and high temperature cut-off switch. All internal circuits shall be fused. The outer jacket shall be of baked enamel finish and shall be provided with full size control compartment for performance of service and maintenance through hinged front panel and shall enclose the tank with foam insulation. Electrical junction box with heavy duty terminal block shall be provided. The drain valve shall be located in the front for ease of servicing. Heater tank shall have a three year limited warranty as outlined in the written warranty. Manufacturer shall supply ASME rated temperature and pressure relief valve. Fully illustrated instruction manual to be included.

A.O. Smith Water Products Co., Inc. On Line
www.hotwater.com

For Technical Information and
Automated Fax Service,
Phone: 800-527-1953

A. O. Smith
Water Products Company
Irving, TX
A Division of A. O. Smith Corporation

A. O. Smith Corporation reserves the right to make product changes or improvements at any time without notice.