


L E U C O S[®]

INSTALLATION INSTRUCTIONS - LEUCOS USA

FIOLA T



A1	Enclosed		 One installer	 Save instructions	Revised 06 / Giugno /2006
----	----------	---	---	---	------------------------------


WARNING:

- Disconnect power before installation.
- Install in accordance with the national and local electrical codes.

ATTENTION IN CASE OF DAMAGE OF THE FLEXIBLE SUPPLY CABLE, SUBSTITUTION SHOULD BE CARRIED OUT BY THE CONSTRUCTOR, CLIENT SERVICE OR QUALIFIED PERSONNEL, IN ORDER TO AVOID DANGER.

- 1) Place the bulb into the lampholder and switch on to check its working;
- 2) Guide the diffuser's opening over the bulb and the holder tube, as shown in **FIG.2**, and handle with a great care in order to lean it on the three rubber washers on top of the three supports **B**.
- 3) Restore power.
PLEASE NOTE: that the on-off switching is provided by the brass disk **C** on the base. It's a fading touch dimmer so that it's enough to touch it sweetly with finger to obtain two light effects:
1- Lasting touch till the maximum light power ;
2- Middle touch till the first light pause recorded for a night effect. Note that each previous operation shall be recorded by electronic device so that it shall be enough a simple touch to recall the recorded lighting.

FOR USA MARKET ONLY :

FIOLA T : max 1x100 W 120V E26 Type A 

For additional information please contact your local dealer
or **LEUCOS U.S.A.** at: Tel. (732) 225-0010 Fax. (732) 225-0250

Fig.1


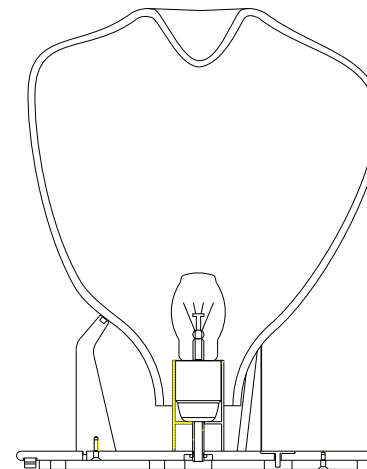


Fig.2

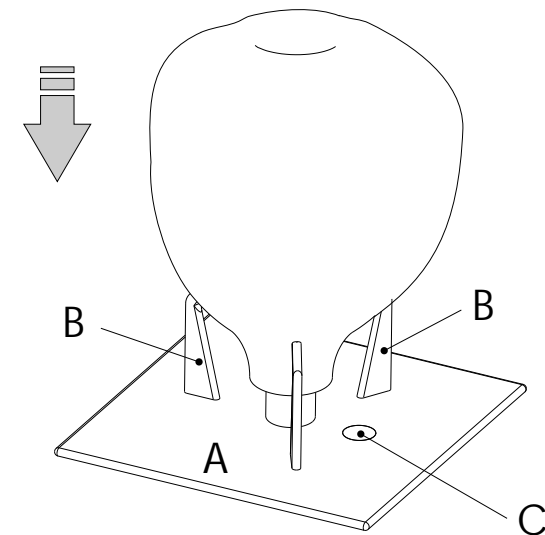