


LEUCOS®

ISTRUZIONI DI MONTAGGIO E MANUTENZIONE
INSTALLATION INSTRUCTIONS

GILL 40



A1

Enclosed

USA



One installer



Save instructions

Revised
21 November 2005


WARNING :

DISCONNECT POWER BEFORE INSTALLATION. - INSTALL IN ACCORDANCE WITH THE NATIONAL AND LOCAL ELECTRICAL CODES - FOLLOW DIRECTIONS CAREFULLY TO AVOID SCRATCHING THE GLASS DIFFUSER.


1. Before attaching the mounting plate to the j-box, loosen the 3 screws "C" located around the border of the structure. Separate the cover "A" from the plate "B".
2. Connect the fixture's electrical wires to the supply wires. Cover the wire cables with the protections fiber glass tubes provided.
3. Secure the metal plate "B" to the wall or to the ceiling (j-box) by the slots "X" provided.
4. Attach cover "A" to plate "B" by utilizing the 3 set screws "C".
5. Install light bulb and make a working ceck.
6. Place the glass diffuser to the structure utilizing the 3 set thumb screws "D" aligning them to the 3 holes "F". Do not use tools.

IN ORDER NOT TO BREAK THE GLASS, DO NOT OVER TIGHTEN THE SCREWS.

7. Restore power.

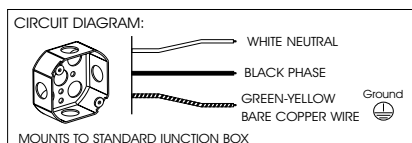

For additional information please contact your local dealer or
LEUCOS USA at: tel. (732) 225-0010 fax (732) 225-0250

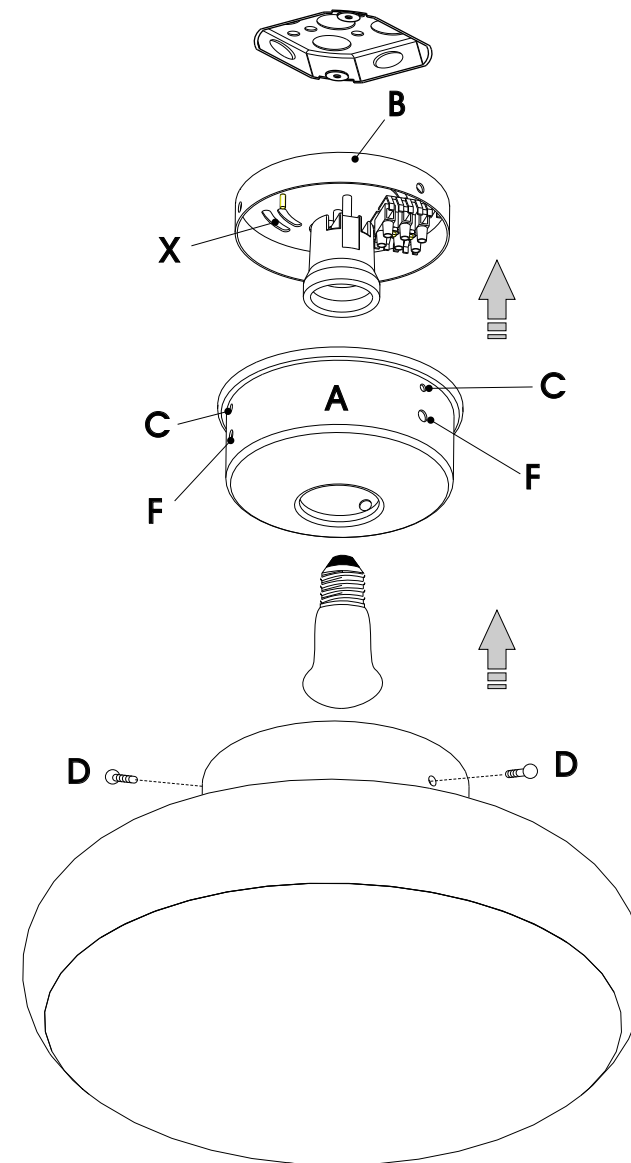

GILL 40 - Max 100W White E26 Medium Screw Type A

