

LEUCOS® U.S.A.

INSTALLATION INSTRUCTIONS

DIANE P - LINDA P

A1

Enclosed



One installer



Save instructions



Revised
23 January 2006


Warning: - Disconnect power before installation. In accordance with the national and local electrical codes.


- Follow directions carefully to avoid scratching the glass diffuser.

1. ILL.1 Install plate "A" to the Junction box by the slots provided. "
2. Connect the electrical wires inside the Junction box.
3. ILL.1-4 Hook the cover "B" to the plate "A" as shown in ILL.4, then lock it tightening screw "D". Take care to make a solid assembling.
4. Insert the bulb.
5. ILL.2-3 Position diffuser on the structure as shown and take care to place the red coupon corresponding to the lower bracket "E". Unscrew the threaded pin "L" (ILL.3) and pull on the upper bar "F" in order to hold the diffuser inside the upper bracket as shown in ILL.2. Complete the correct arrangement of the diffuser by screwing the plastic screw "G" (by fingers) and the upper dowel "H" ILL.1 in order to push diffuser on a complete contact with brackets "E" and "F".
6. Restore power.


FOR U.S.A. MARKET ONLY:

DIANE P max 1x100W - 120V - E26 TYPE A 
 max 1x26W - 120V - G24q3 TYPE QUAD TUBE 


LINDA P max 1x100W - 120V - E26 TYPE A 

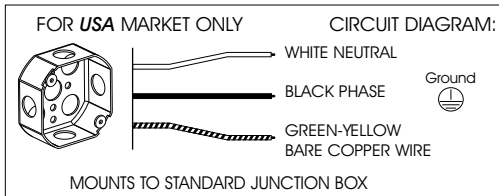


ILL.1

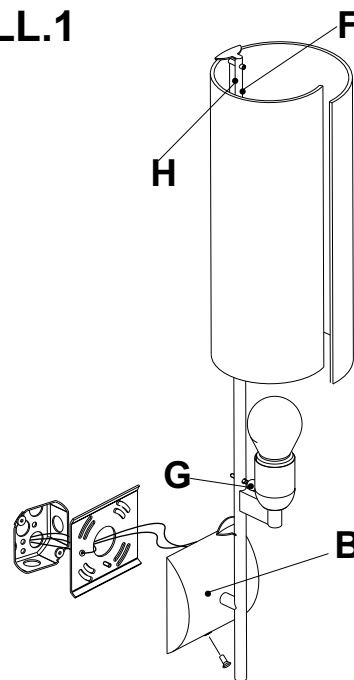


ILL.2

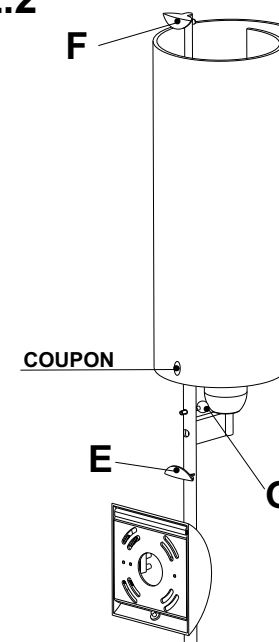

ILL.3

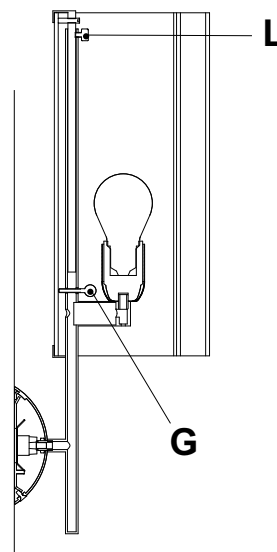

ILL.4

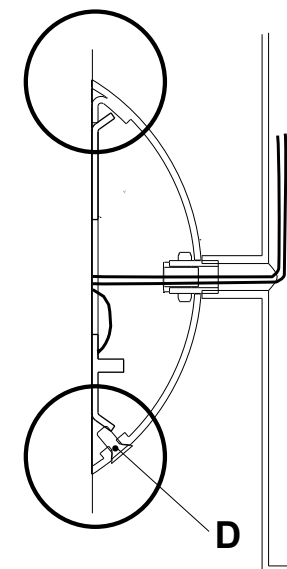

For additional information please contact your local dealer or **LEUCOS U.S.A.** at: Tel. (732) 225-0010 Fax. (732) 225-0250