


# LEUCOS®

INSTRUCTIONS FOR INSTALLATION - LEUCOS USA

## MANHATTAN P



A1 Enclosed



One installer



Save instructions

Revised  
04 Luglio 2006

### WARNING:


- Disconnect power before installation.
- Fixture to be installed by a certified electrician.
- Install in accordance with the national and local electrical codes.
- Take great care to avoid scratching or chipping the glass when carrying out the operations below.

1. ILL. 1 Place the back plate "Y" onto the J-Box, by using the slots provided.
2. ILL. 1 Install structure "A" onto the black plate and lock it by the two threaded pins "X" provided and the corresponding thumb screws "Z". **Note:** take care to guide the supply wires through the hole "C" provided.
3. ILL. 1 Connect supply wires to the terminal block. Be careful to check the correct polarity. **Please note:** the length of the wire cannot be altered.
4. ILL. 1 Place cover "F" to the wire housing, and secure it to the structure by tightening the screws "D" provided.
5. ILL. 1 Insert the bulb into lampholder.
6. ILL. 2 e 3 Take great care on placing the glass diffuser in order to avoid wrong handling that could scratch the glass. Guide the glass, as shown, from the top, at first inside the opening of the side block "G" and then (ILL. 4), with great care, inside the left opening "H" and inside the bottom seat "I" (ILL. 3).
7. When placed, it is necessary to lock the glass by tightening, carefully and moderately, the plastic screw "L" placed on the back side of the block "G" ILL. 5.
8. Restore power.


MANHATTAN P Incandescent : max 1x100W Type A-19 white

MANHATTAN P fluorescent : max 1x24W 2G11 Type long-Twin tube-electronic

### CIRCUIT DIAGRAM:

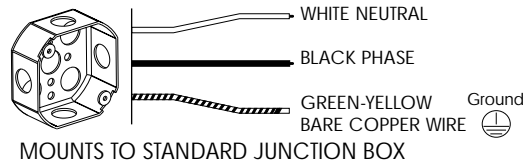

For additional information please contact your local dealer or LEUCOS U.S.A. at: tel. (732) 225-0010; fax (732) 225-0250

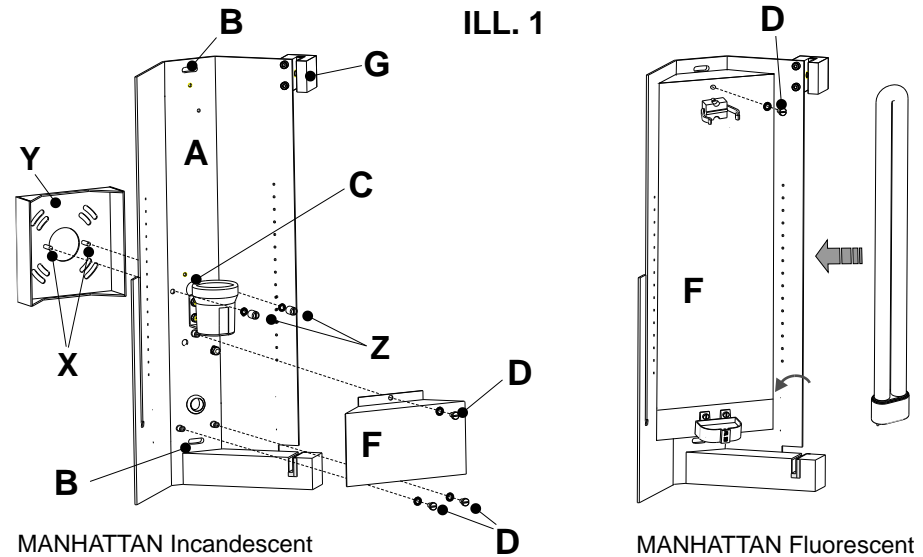

ILL.2

