

# DELAVAN Passage 2W






## Specifications

|                |                                                                            |
|----------------|----------------------------------------------------------------------------|
| Latch Type     | 2-Way Latch                                                                |
| Door Prep      | Cross bore 2-1/8" dia (54mm). Edge bore 1" dia (25mm)                      |
| Backset        | Adjustable to 2-3/8" or 2-3/4"                                             |
| Door Thickness | 1-3/8" - 1-3/4" door standard                                              |
| Cylinder       | —                                                                          |
| Faceplate      | 1" x 2-1/4" radius corner. (square corner & 6W or drive-in also available) |
| Strike         | Standard radius corner. Other options available.                           |
| Bolt           | Full 1/2" throw. Nickel plated.                                            |
| Door Handing   | Non-handed. Reversible for Left or Right hand doors.                       |
| Keyway         | —                                                                          |
| Keyed Alike    | —                                                                          |



## Dimensions

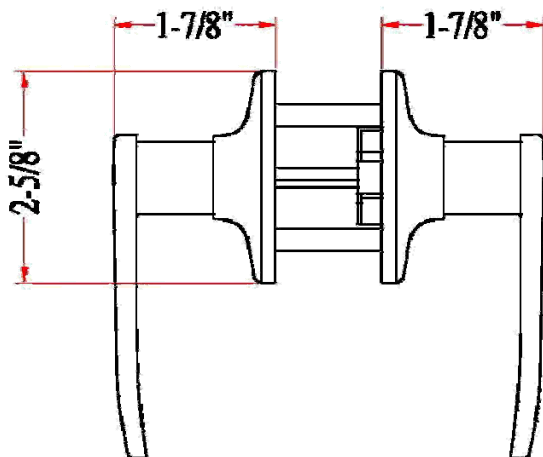

## Warranty & Compliances

|           |                                                 |
|-----------|-------------------------------------------------|
| Warranty  | Limited Lifetime Mechanical / 5 year Finish     |
| ANSI/BHMA | Meets ANSI Grade 3 specification                |
| ADA       | Compliant                                       |
| UL        | UL Listed for use on fire doors (up to 3 hours) |



## Order Codes

|                           |          |  |
|---------------------------|----------|--|
|                           | Box Pack |  |
| Satin Nickel (US15)       | 702092   |  |
| Oil Rubbed Bronze (US10B) | 702357   |  |

Type:

Job:

Order Code:

Approvals: