

## THERMOSTATS

### RADISTAT-MAN: manual digital thermostat




- ▶ Two temperature sensors - one in floor, one in thermostat for accuracy and security
- ▶ Ground Fault Circuit Interrupter (GFCI) included
- ▶ Advanced temperature control ensures total comfort by minimizing temperature variations
- ▶ Temperature control:  
Microprocessor-optimized PIA  
Heating cycles: 15 minutes  
Accuracy:  $\pm 0.5^{\circ}\text{C}$  /  $09^{\circ}\text{F}$

### RADISTAT-PRO: programmable thermostat



- ▶ 7-day, 4 time periods/day, 2 temp. settings
- ▶ Pre-programmed or personalized schedule
- ▶ Ground Fault Circuit Interrupter (GFCI) included
- ▶ Remote input works with phone or alarm system (telephone controller required)
- ▶ Temporary bypass enables temperature override without changing programming

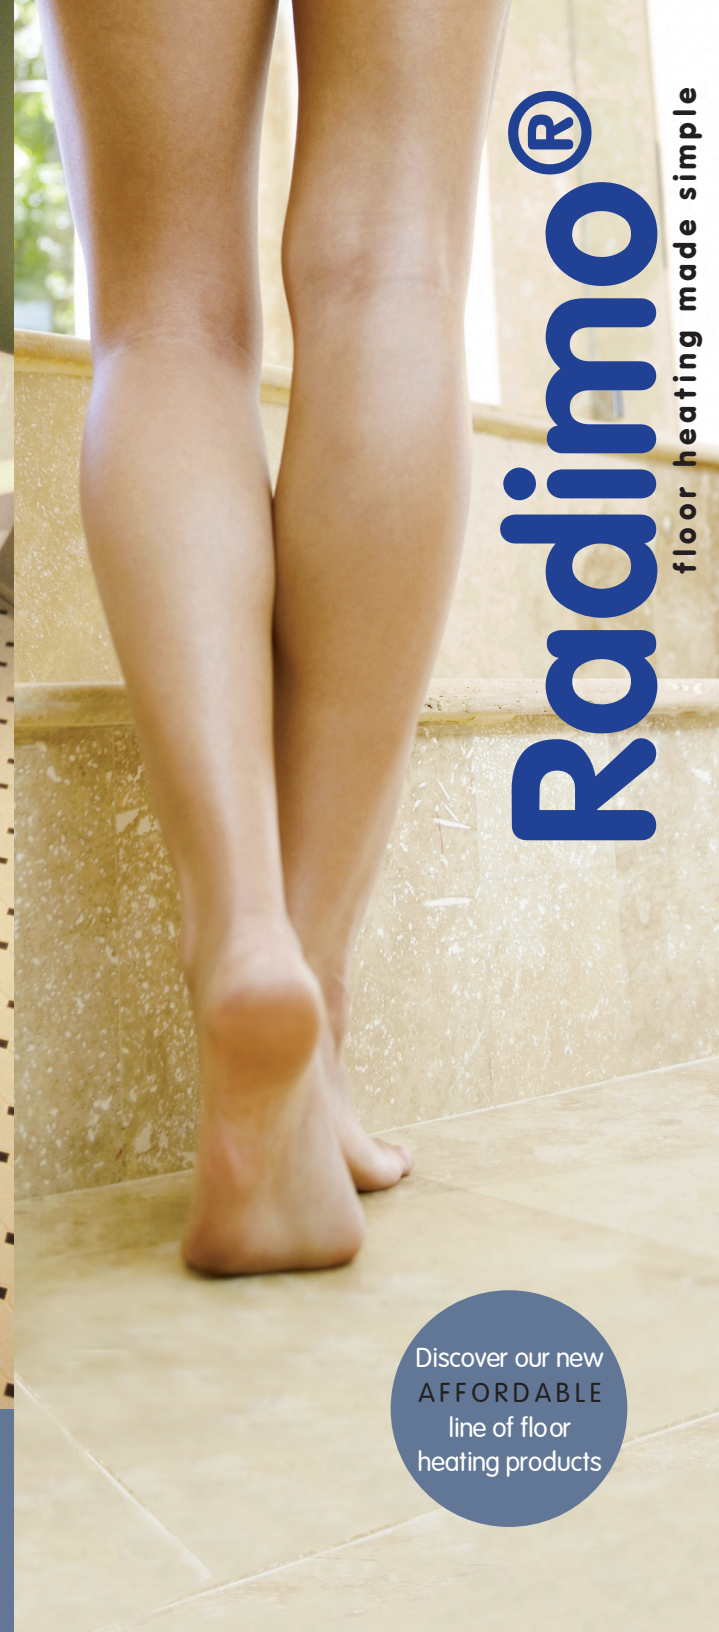

# Radimo®

floor heating made simple

Discover our new  
**AFFORDABLE**  
line of floor  
heating products


[www.radimo.com](http://www.radimo.com)

TEL 1-855-5-RADIMO


EMAIL [us@radimo.com](mailto:us@radimo.com)

## RADIMAT

- ▶ Mat can be easily covered by floor finish without additional screed
- ▶ Fast installation saves time, thanks to convenient matting format
- ▶ Self-adhesive double-sided tape provides secure installation
- ▶ 10-year warranty for peace of mind

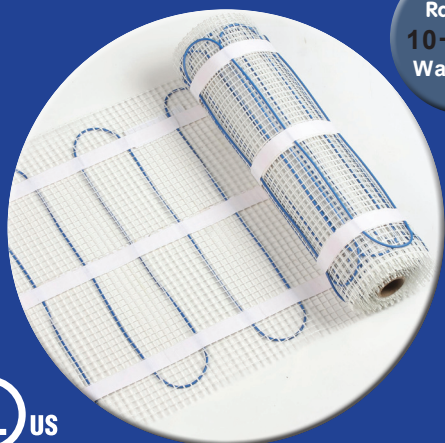


Radimo®  
10-YEAR  
Warranty

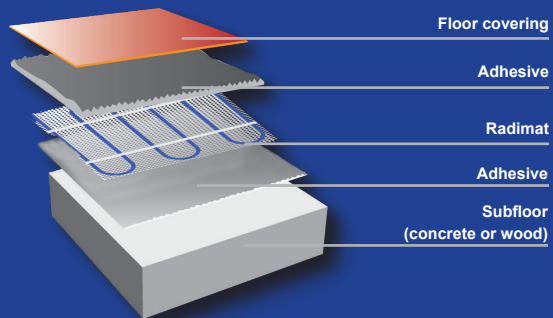


## RADICABLE

- ▶ Double-insulated wire for durability
- ▶ Easy installation
- ▶ Single cold lead
- ▶ Available in 120 and 240V
- ▶ 10-year warranty

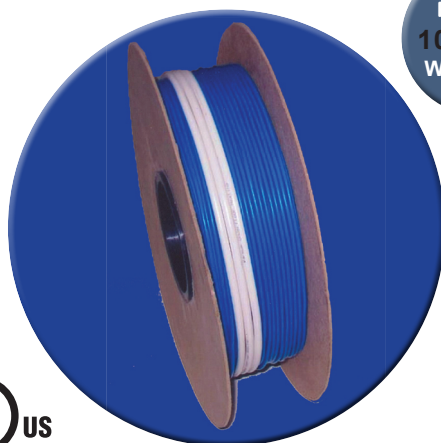

Radimo®  
10-YEAR  
Warranty

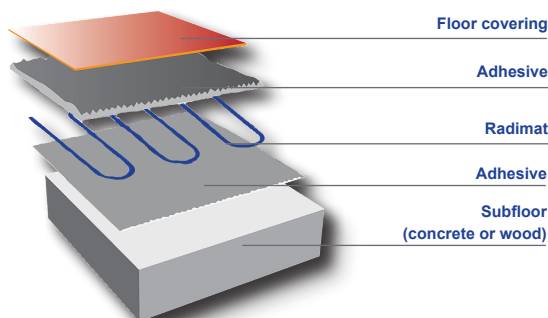

## PRODUCT SELECTION GUIDE

Operating voltage	120V and 240V; 50/60Hz
Cable thickness	1/8" (3 mm)
Mat width	20" (500 mm)
Overall mat thickness	1/8" (3 mm)
Output rating	12 W/sq ft
Cold tail length	9 ft (3m)
Cable heat output	3 watts/linear foot*

### Radimat

	Area (sq ft)	Heaters	Watts	Amps	Length (ft)
120 volts	10	RADIMAT-10-120	120	1.0	6
	20	RADIMAT-20-120	240	2.0	12
	30	RADIMAT-30-120	360	3.0	18
	40	RADIMAT-40-120	480	4.0	24
	50	RADIMAT-50-120	600	5.0	30
240 volts	75	RADIMAT-75-120	900	7.5	46
	30	RADIMAT-30-240	360	1.5	18
	40	RADIMAT-40-240	480	2.0	24
	50	RADIMAT-50-240	600	2.5	30
	75	RADIMAT-75-240	900	3.8	46
	90	RADIMAT-90-240	1080	4.5	55
	110	RADIMAT-110-240	1320	5.5	67
150	RADIMAT-150-240	1800	7.5	91	

### Radicable

	Area (sq ft)	Heaters	Watts	Amps	Length (ft)
120 volts	10	RADICABLE-10-120	120	1.0	40
	20	RADICABLE-20-120	240	2.0	80
	30	RADICABLE-30-120	360	3.0	120
	40	RADICABLE-40-120	480	4.0	160
	50	RADICABLE-50-120	600	5.0	200
240 volts	75	RADICABLE-75-120	900	7.5	300
	30	RADICABLE-30-240	360	1.5	120
	40	RADICABLE-40-240	480	2.0	160
	50	RADICABLE-50-240	600	2.5	200
	75	RADICABLE-75-240	900	3.8	300
	90	RADICABLE-90-240	1080	4.5	360
	110	RADICABLE-110-240	1320	5.5	440
	150	RADICABLE-150-240	1800	7.5	600
	190	RADICABLE-190-240	2400	10.0	600

\*Except for RADICABLE-190-240: 4 watts/lin ft