

ASKO Style Dishwasher



D5894XXLFI

Type: Built-in or fully integrated
Colors: Fully Integrated (FI) model accommodates a selection of accessory door panels or customer supplied custom wood panel.

PERFORMANCE

Capacity: 17 place settings
Noise level 44 dB(A)
10Spray™ system
PowerZone™ Pots & Pans, PowerZone™ Plate, PowerZone™ Cutlery

PROGRAMS

Time	Heavy	Normal
Daily	Quick	Super Quick
Plastic	Delicate	Eco
Mixed	Rinse and Dry	Rinse & Hold

Upper Wash, Lower Wash,
Crocery / Plate Warming
Super Quick program in 15 minutes!

FEATURES

9 Temperatures, Turbo Drying Express, Delayed start 1-24 h, Time set, Time saver, Super rinse, Tab, Cool touch, 1/2 load function, Status Light™, Hidden control, LCD display, Halogen interior light, Front-adjusting rear leg for easy installation, Front-adjusting door springs (FI), Uses as little as 2.6 gals of water in Quick wash, Energy Star rated, 2 Plus 1 warranty

FLEXIRACKS™

Exclusive height-adjustable upper rack accommodates: 9" - 7 1/2" items, 5 rows of glasses capacity, Fold-down stemware shelves, Exclusive: World's only 4 rack, 7 basket dishwasher, Exclusive: World's most usable capacity Exclusive lower rack accommodates: 15 1/4" dishes. Fold-down tines for storage flexibility, Wide tine design for large bowls and platters, Upper & lower rack handles. Middle rack with dedicated wash system, Cutlery basket, Cutlery Plus basket, Knife rack with dedicated wash system



MADE IN SWEDEN



Exclusive World's Most Usable Capacity - 17 place settings!
World's only 4 rack, 7 basket dishwasher
World's tallest loading height!



Asko Appliances, Inc

PO BOX 940609 • Plano • Texas • 75094

Phone 800.898.1879

www.askousa.com

Art. no: 6301729

XXL TALL TANK MODELS

PLANNING & DESIGN: XXL DISHWASHERS


D5524XXLFI, D5534XXLFI, D5554XXLFI, D5894XXLFI

Unit Dimensions

	US	METRIC
HEIGHT:	33 ⁷ / ₈ " – 36"	860 – 914 mm
WIDTH:	23 ⁵ / ₈ "	600 mm
DEPTH:	22 ⁷ / ₈ "	581 mm
DEPTH W/DOOR OPEN:	49 ¹ / ₂ "	1257 mm
WEIGHT:	94 lbs	43 kg

Technical Data

Electricity	120V, 60 Hz, 15 Amp
Water pressure	18 – 176 psi
Heating element	1200 watt
Max loading	1300 watt

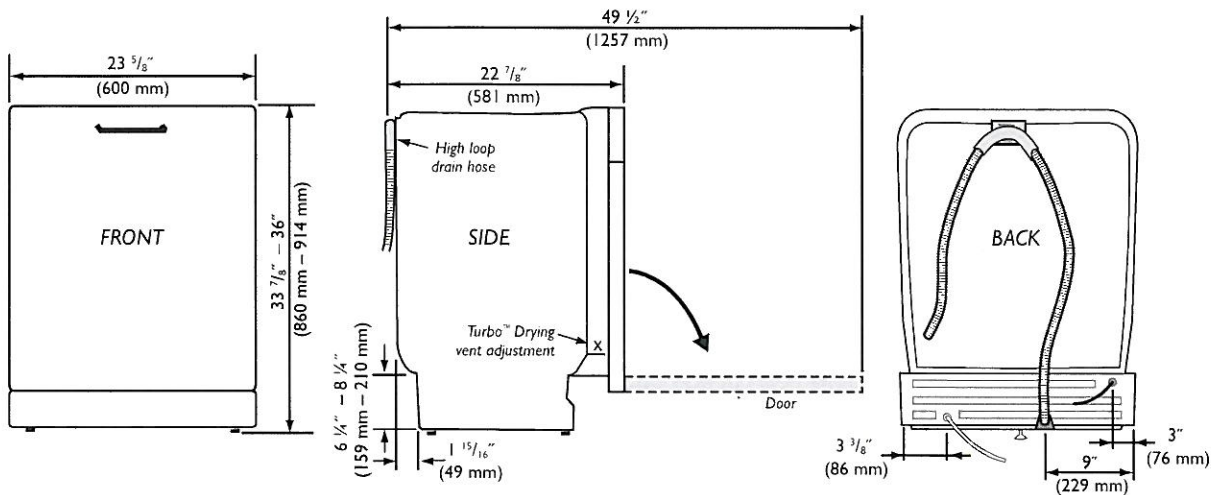

Toe kick reveal height will be the dishwasher installation height minus the door panel height.


Custom Front Panels

The D5524XXLFI, D5534XXLFI, D5554XXLFI and D5894XXLFI can only be installed with a fully-integrated custom door panel that extends from the desired toe kick height to the counter top. A one-piece accessory door panel selection is also available.

Cutout Dimensions

	US	METRIC
HEIGHT:	33 ⁷ / ₈ " – 36"	860 – 914 mm
WIDTH:	23 ⁵ / ₈ " – 24"	600 – 610 mm
DEPTH:	24"	610 mm

The electrical and water supplies should enter through the area indicated by the shaded area. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 2" (51 mm) in diameter.

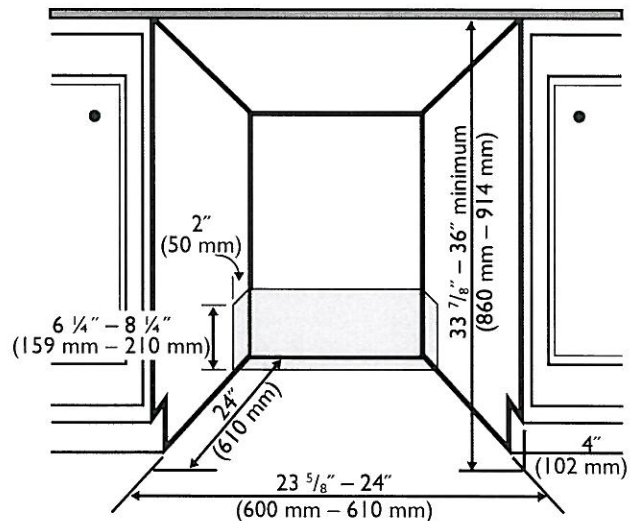

* If accessory FI fill strips are used, then ¹/₂" (13 mm) must be added to the dishwasher height and cutout. Additionally, ³/₈" (10 mm) must be added to the dishwasher width and cutout width.