



Features



- Over 30 finishes including 14 PVD finishes
- Solid brass construction
- Handshower: Maximum flow rate: 2.5 gpm (9.5 L/m) or 2.0 gpm (7.6 L/m) for "WE" (water efficient) model
- Handshower: 1/2" MIP inlet with self-clean rubber jets
- Handshower elbow: 1/2" FIP swivel nut with 1/2" MIP inlet
- Hose: 84" Black poly braided hose. Provides durable, quiet & no damage to trim finish during operation
- Diverter valve (DDV-R) sold separately
- For additional product offerings, see www.californiafaucets.com

Codes/Standards Applicable

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- ADA

TO-33.1 TO-WE-33.1

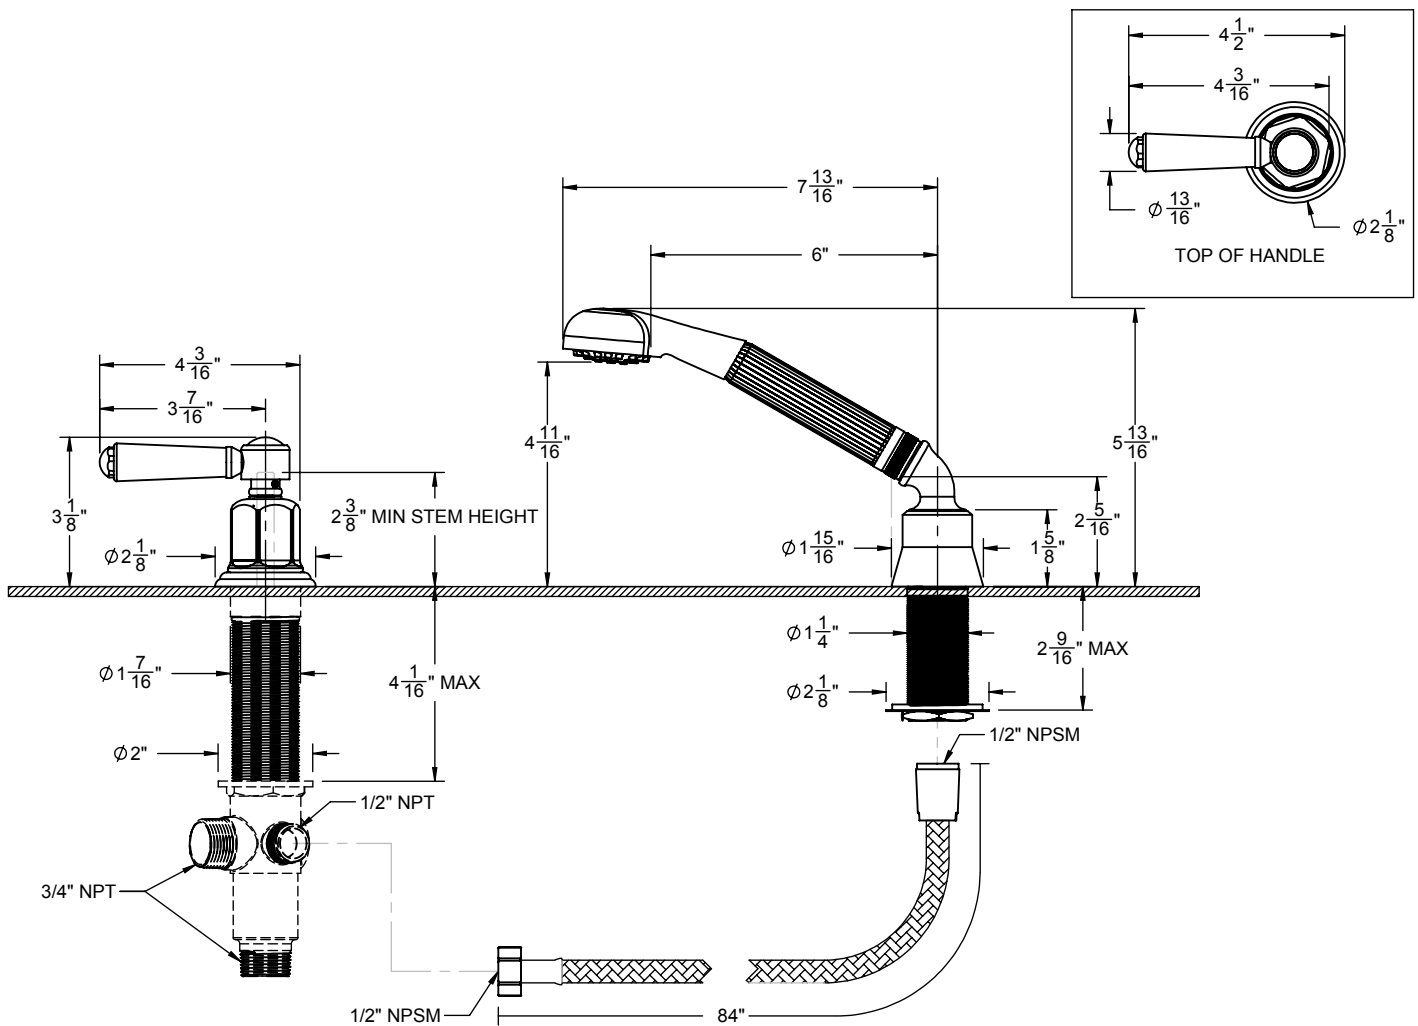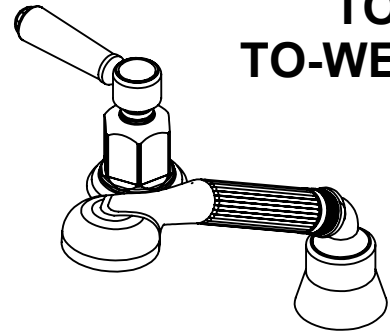

THROUGH-HOLE SPECIFICATIONS

| | MIN | RECOMENDED |
|---------|------------------------------|-----------------------------|
| SHOWER: | $\varnothing 1\text{-}1/4"$ | $\varnothing 1\text{-}1/4"$ |
| VALVE: | $\varnothing 1\text{-}7/16"$ | $\varnothing 1\text{-}1/2"$ |

ALL DIMENSIONS SHOWN TO NEAREST 1/16"