


CFL WALL BACKPLATE

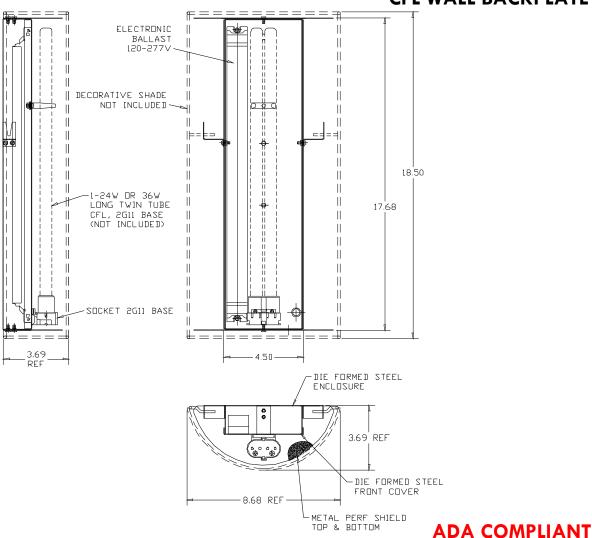

CONSTRUCTION: Steel backplate.

ELECTRICAL: 1 x 24W or 36W 2G11 CFL. 120/277V electronic ballast standard. UL approved for damp

location use

FINISHES: Painted white

MOUNTING: Mounts to octagon junction box or 4x4 junction box with round plaster adapter

OPTIONS: Backplate only. Consult catalog or website for compatible diffusers.

Specify diffuser separately

Dimming and Emergency Battery available. Consult factory

Accepts 1032 cast diffuser brackets and 1036 Blade shade retention hardware set. Consult

catalog or website for hardware use guidelines.