


LED SUSPENSION

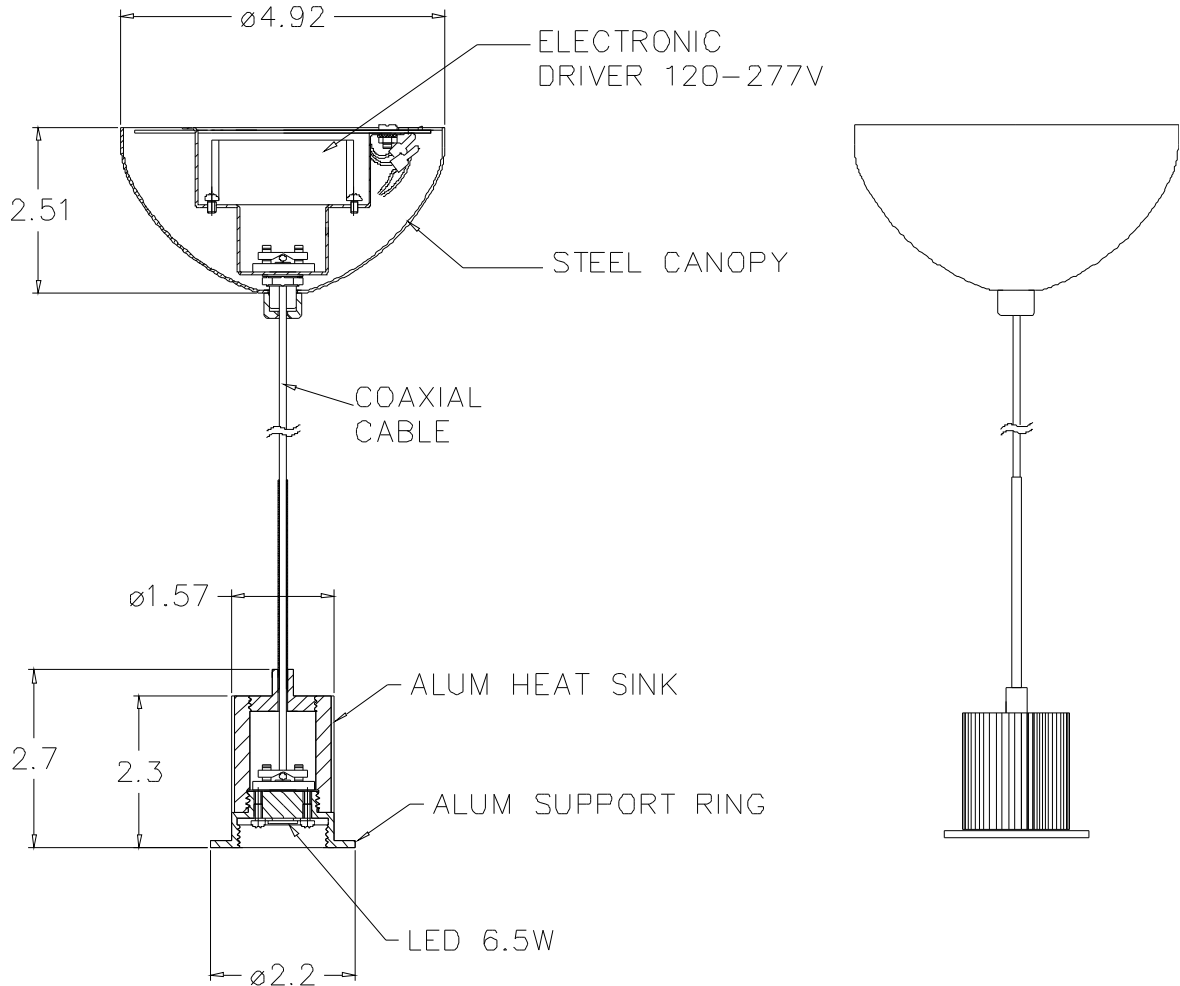

CONSTRUCTION: 59" coaxial cable suspension for flexible mounting heights

ELECTRICAL: Includes 6.5W Bridgelux remote phosphor LED. 120/277V electronic driver standard. UL Approved for damp location use

FINISHES: Satin Nickel

MOUNTING: Mounts to octagon junction box or 4x4 junction box with round plaster adapter

OPTIONS: Suspension only. Consult catalog or website for compatible shades. Specify shade separately