



KOSHIN 3" CENTRIFUGAL PUMP

SEH-80X



Features

- All impellers and volutes are constructed of cast iron for durability and long operating life.
- Pump casing is made of die cast aluminum for lightweight portability and strength.
- Protected from damage by a sturdy steel roll cage. Vibration isolators are built-in.
- Low oil sensor is standard.
- Self priming to 26 feet, maximum head up to 187 feet.


Applications

- Construction and industrial dewatering.
- Utilities, manhole and vault draining.
- Landscape and irrigation.

Specifications

Model	SEH-80X
Discharge Size	3"
Maximum Capacity	246 G.P.M
Maximum Head	85 Ft.
Maximum Suction	26 Ft.
Maximum Pressure	36.8 PSA
Engine Type	Honda GX 160
Displacement	163 CC
Horse Power	5.5 HP
Fuel Capacity	0.95 Gal.
Fuel	Gasoline
Continuous Operation Time Per Tank	2.5 Hrs.
Dimensions LxHxW	20"x15"x18"
Net Weight	68 lbs.

Performance Curve

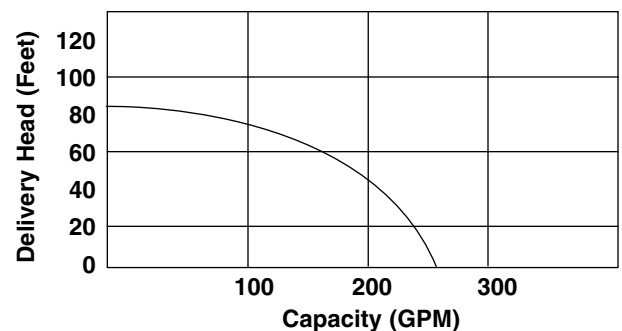

KOSHIN AMERICA CORP.

1218 Remington Road • Schaumburg, IL 60173
847/884-1570 • 800/634-4092 • FAX 847/310-0740

Distributed by: