


15 HP Two-Stage 175 PSI Industrial Series Compressors

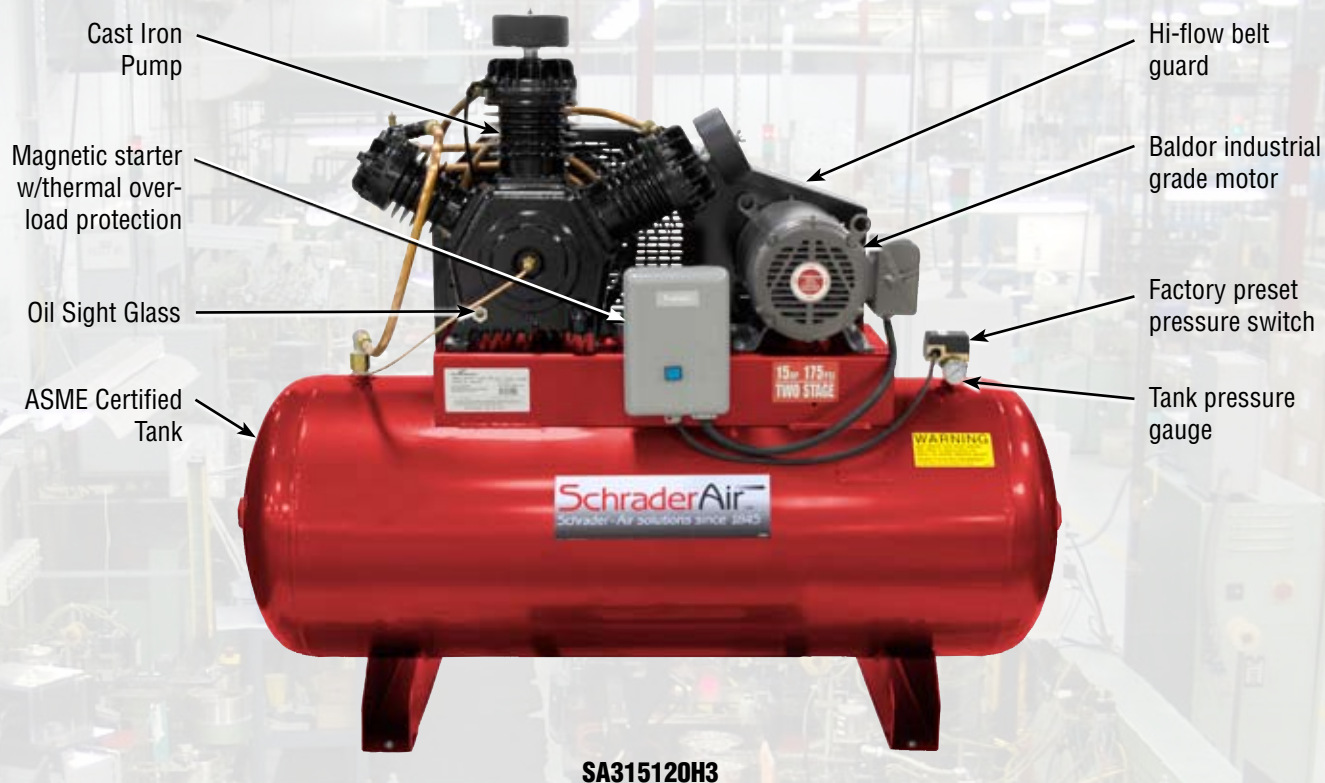

Ideally suited for tire dealers, large volume body shops, large auto repair facilities and commercial dry cleaners.

This 2-Stage, high pressure, large capacity unit represents the next generation of industrial air compressors. The redesigned unit includes a solid cast iron, low RPM, 2-stage pump, high volume cooling fan and hi-flow belt guard as well as an aluminum air cooled after-cooler.

- Low speed, 900 RPM 3-cylinder cast iron pump provides maximum life, minimum wear
- 53.4 cfm displacement@175 PSI
- 145 - 175 PSI operating pressure
- Disc and spring valves
- Super efficient aluminum air cooled after cooler lowers the discharge temperature to within 20 degrees of ambient, extending check valve life.
- Oil sight glass
- Easy start head unloader
- Energy efficient, EISA compliant*, Baldor industrial electric motor
- Factory installed magnetic starter provides thermal overload protection to motor.
- ASME certified tank
- Precision tank safety relief valve
- Three industrial drive belts for maximum efficiency

15 HP Two-Stage 175 PSI Industrial Series Compressors



SA315120H3

Specifications

| Model # | Motor | | | | | | Pump | | | | Tank | | Dimensions | |
|--------------|-------|---------|-------|-----|--------------|------------|------|-----|-----------|---------------|------|---------|--------------------|----------------|
| | HP | Voltage | Phase | FLA | Breaker Size | Wire Size* | Cyl. | RPM | Disp. CFM | SCFM @175 PSI | Gal. | Config. | L x W x H (inches) | Ship Wt. (lbs) |
| SA315120H3 | 15 | 208/230 | 3 | 41 | 80 | 6 | 3 | 900 | 60 | 53.4 | 120 | H | 71 x 25 x 58 | 900 |
| SA315120H346 | 15 | 460 | 3 | 21 | 40 | 10 | 3 | 900 | 60 | 53.4 | 120 | H | 71 x 25 x 58 | 900 |
| SA315240H3 | 15 | 208/230 | 3 | 41 | 80 | 6 | 3 | 900 | 60 | 53.4 | 240 | H | 85 x 46 x 72 | 1050 |
| SA315240H346 | 15 | 460 | 3 | 21 | 40 | 10 | 3 | 900 | 60 | 53.4 | 240 | H | 85 x 46 x 72 | 1050 |

*Wire size if under 50 feet

Recommended Accessories

| Model # | Auto Electric Tank Drain | Install Kit | Vibration Pads Only | Drive Belt (uses 3) | Air Filter Element | Oil (capacity, qts.) | Pressure Switch | Pressure Gauge | Refrigerated Air Dryer 140° | Refrigerated Air Dryer 250° |
|-----------|--------------------------|-------------|---------------------|---------------------|--------------------|----------------------|-----------------|----------------|-----------------------------|-----------------------------|
| All above | 907001 | 824678 | 824679 | 82908 | 822 | 826020**(6) | 82779 | 82516 | SRD0150 | SRD0250 |

**Oil sold in 1 quart bottles