FRIGIDAIRE.

PROFESSIONAL



Freestanding Range

FPGF3081K F



Signature Features



PowerPlus™ Preheat

Preheat in less than six minutes.1



Pro-Select™ Controls

Precise control at your fingertips.



True Convection

Multi-rack baking is faster and more even with True Convection.



PowerPlus™ FullRange Burner Go from a 500-BTU simmer to a

17,000-BTU boil quickly.

30" Gas

Powerful Performance

Effortless™ Convection Conversion
PowerPlus™ and Light Rapid Clean Options
PowerPlus™ Broil

Performance-Driven Style

Real Stainless Steel
Effortless™ Oven Rack
Even Baking Technology
Continuous Cast Iron Grates
with Black Matte Finish
Center Oval Burner (9,500 BTU)
Low-Simmer Burner (5,000 - 500 BTU)

SpaceWise™ Design

SpaceWise™ Half Rack Cast Iron Griddle

One-Touch Options

Keep Warm My Favorite Chicken Nuggets Pizza Add-a-Minute

More Easy-To-Use Features

Keep Warm Drawer with Half Rack Extra-Large Window with Pro-Tint Finish Sabbath Mode (Star-K* Certified)

Capacities

5.0 Cu. Ft. Oven Capacity

Overall Exterior Dimensions


Height 47" Width 29-7/8" Depth 28-1/4"

Available in:



¹Based on single rack cooking performance, not set temperature, using PowerPlus™ Preheat.

FPGF3081K F **30" Gas**

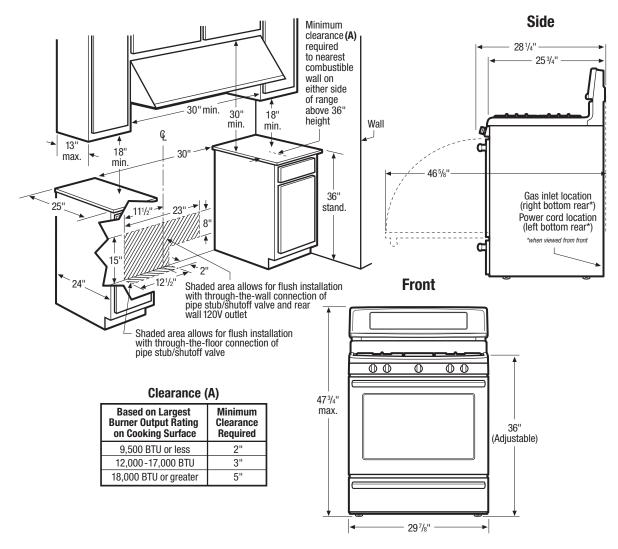

Freestanding Range Specifications

- Product Shipping Weight (approx.) 220 Lbs.
- Voltage Rating 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.8kW
 (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 15 Amps
- · Always consult local and national electric and gas codes.
- Range ships with 3/4" factory regulator.
- Range is LP Gas convertible.
- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.

- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum clearance required (from edge of rangetop to nearest combustible wall on either side of range above 36" height) is based on largest burner output rating on cooking surface.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

