

3" E-PRO REMODEL KIT

Swivel and non-swivel versions include 3" remodel housings



3" E-PRO DOWNLIGHT

The smallest member of the E-Pro Downlight family includes a 3" non-IC remodel housing with a built-in driver. The cut-out template and familiar remodel housing with junction box accepts 120V supply power via one of the eight 1/2" knockouts. Ceiling clips hold the light engine in place. Save 88% in running costs compared to corresponding 50R20 incandescent lamps that last only 2,000 hours.



FEATURES

- Kit includes light engine with integrated trim, 3" non-insulated remodel can and cut-out template
- Choose between standard and swivel versions in three finishes
- Meets Title 24 requirements (no additional parts required)
- 3000K Warm White LED light and high color rendering produce attractive accent lighting with true color rendering
- Highly efficient – produces over 50 lumens per watt
- Offered in three trim finishes – White, Dark Bronze and Brushed Steel – enabling a broad variety of retrofit and new construction options
- Uses only 6 watts to produce the equivalent light output of conventional 50W incandescent lamps
- Long life, low maintenance LEDs last 25,000 hours (average life) and reduce maintenance costs by eliminating frequent lamp replacements
- Dimmable with most standard incandescent dimmers
- Suitable for damp locations
- Five year warranty

3" E-PRO NON-SWIVEL

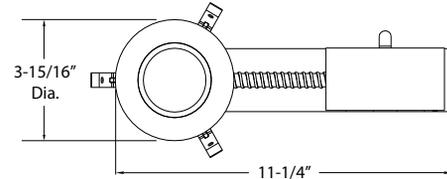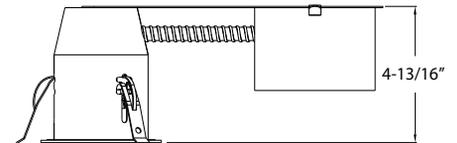

3" E-PRO SWIVEL

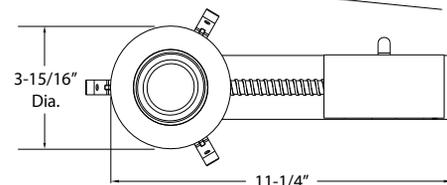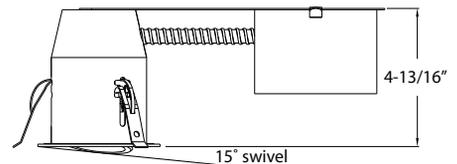

Dark Bronze



Brushed Steel



White

DOWNLIGHTS



RE-30

EP3 = 3" Non-Swivel Kit
EP3S = 3" Swivel Kit



Remodel Housing with 3000K LEDs

DB = Dark Bronze
BS = Brushed Steel
WH = White

3" E-PRO – 3000K

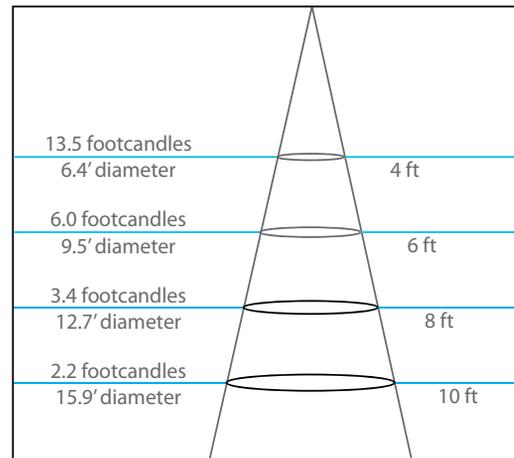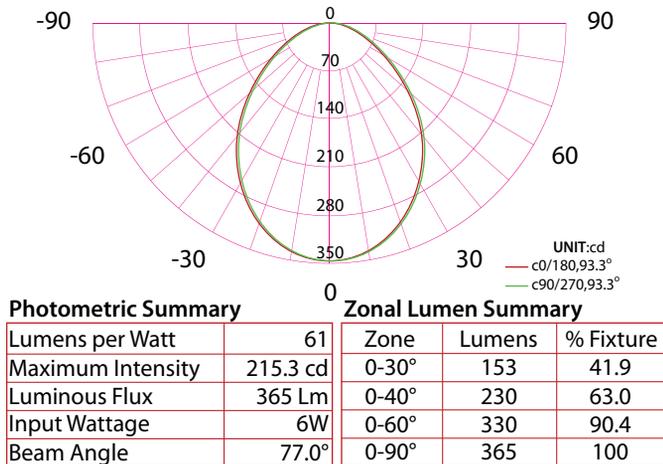

3" E-PRO SWIVEL – 3000K

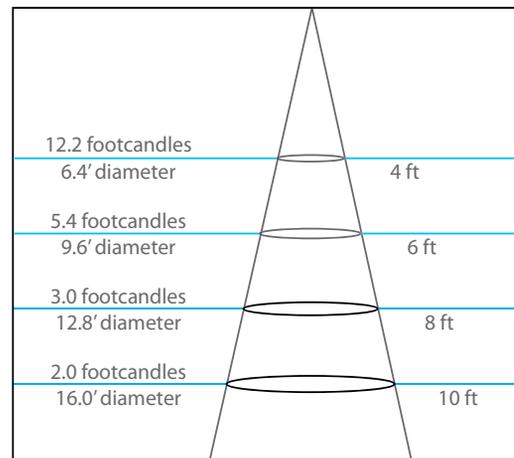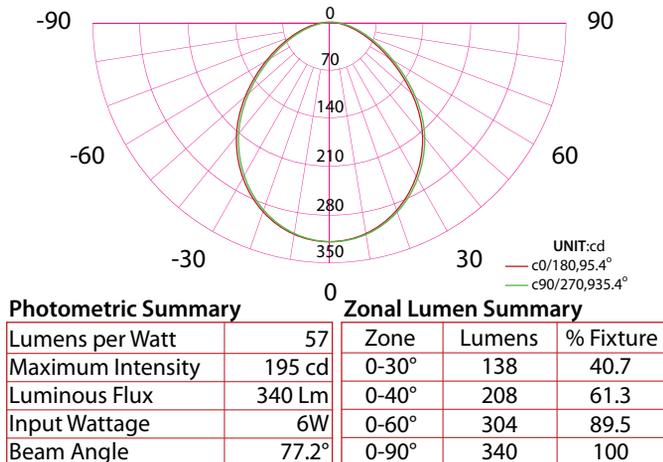

TECHNICAL SPECIFICATIONS

Voltage	120V, 60 Hz AC operation
Construction	Aluminum trim with powder coat finish, aluminum heat sink; steel remodel can with spring steel mounting clips; steel junction box contains sealed driver with heavy duty plastic housing
Mounting	Recessed; for use only with included 3" non-insulated remodel housing for installation from below finished ceiling. Insulation must be pulled back a minimum of 3" away from the housing.
Dimensions	Housing: H = 4-3/4" (4-13-16" with trim), L = 11-1/4" (12-1/2" including mounting clips), W = 5-1/2" (including mounting clips); Trim: Dia = 3-15/16"
Knockouts	Remodel housing's wiring compartment features eight 1/2" standard knockouts
Cut-out	3-3/8" hole size
Light output	EP3 = 365 lumens; EP3S = 340 lumens
Wattage	6 watts
LED specs	Samsung, 25,000 hour rated life, EP3 = 80 CRI, 77.1° beam angle, EP3S = 80 CRI, 77.3° beam angle
Dimmers	Dimmable with most standard incandescent, CFL/LED and low voltage electronic dimmers
Diffuser	Frosted polycarbonate lens
Packaging	Retail box, 6 per case



H

