




FUNCTION. DESIGN. QUALITY.

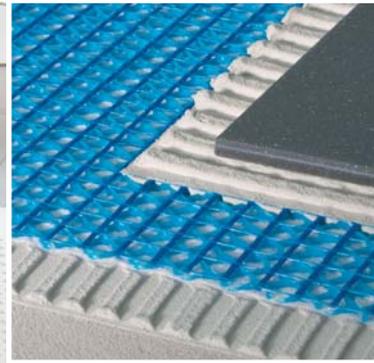


Underlayment Systems

Blanke • Trims and Profiles for
Ceramic Tile and Stone

passion for
tile



Blanke•PERMAT


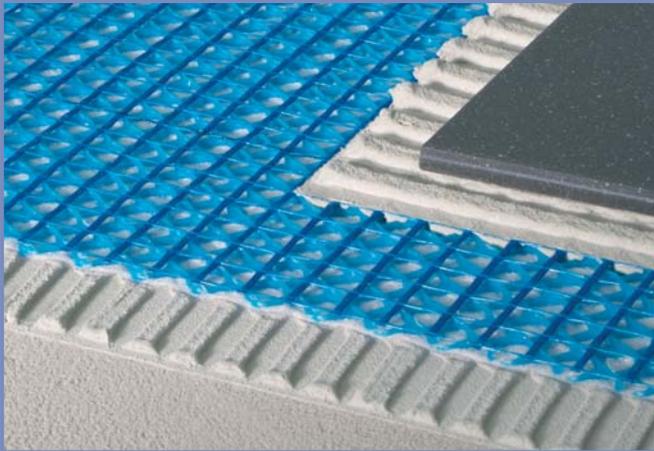


The Blanke•PERMAT is an innovative uncoupling underlayment that offers all the labor saving benefits of the old plastic roll systems. The Blanke•PERMAT also adds support to wood substrates thereby reducing deflection and provides greater compression and tensile strength than plastic roll products. The Blanke•PERMAT is stable to walk on during installation and does not require additional curing time when installing porcelain with latex modified thinset.



Advantages

- Strengthens wood substrates
- Reduces vertical subfloor movement (deflection)
- Superior compressive strength
- Crack isolation properties (uncoupling)
- Superior resistance to delamination during installation
- Lightweight; easy to install
- Self-seaming panels prevent substrate movement stress from transmitting to tiled surface

Example of system using Blanke•PERMAT

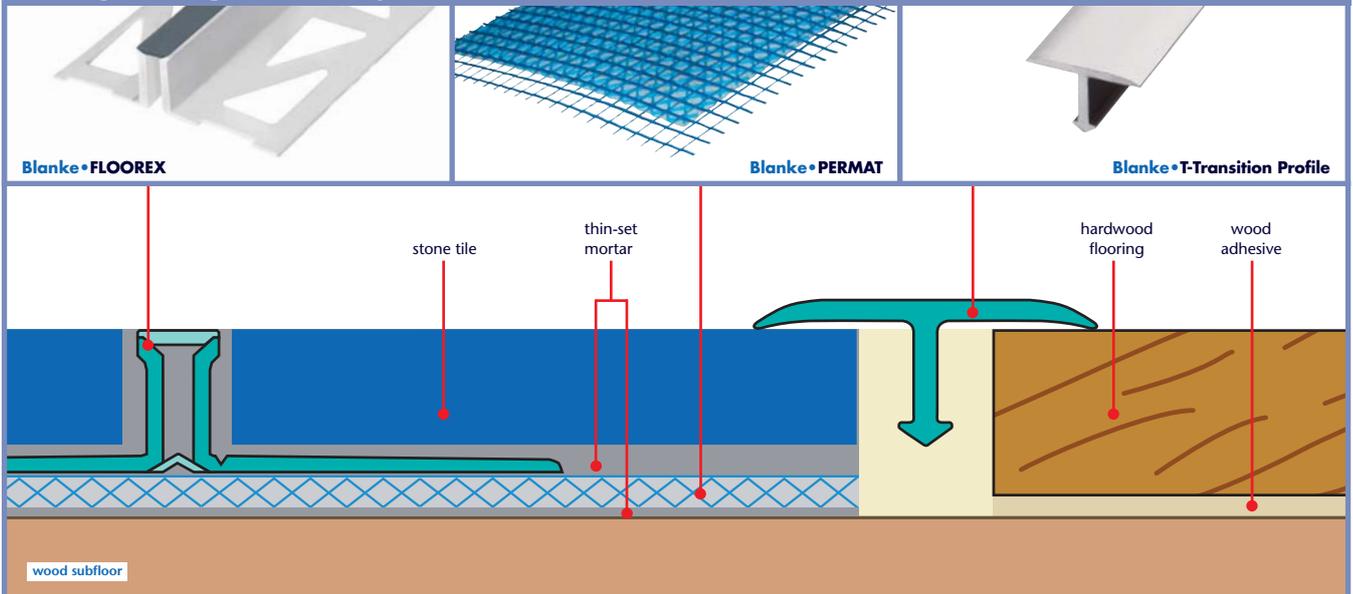

Blanke • ULTRA-DRAIN

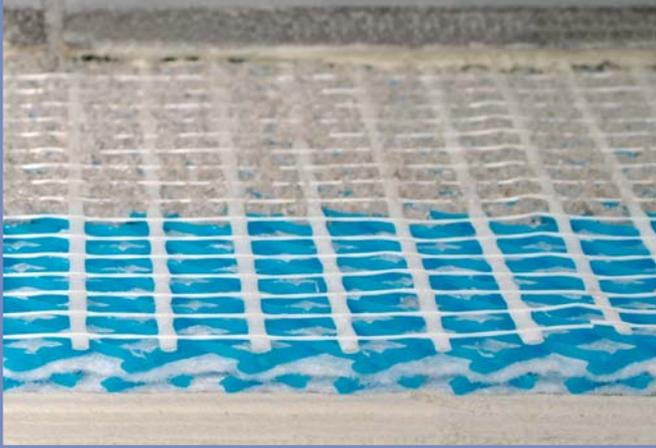

The Blanke • ULTRA-DRAIN is the first drain mat system that can be installed without a thick mortar bed and offers all the stress absorption properties of an uncoupling system. The superior drainage properties prevent freeze/thaw damage caused by the accumulation of moisture in exterior tile installations and help reduce unsightly efflorescence. Although only 1/4" thick, it provides superior compressive and tensile strength when compared to other drain mats and uncoupling systems.

Advantages


- Prevents freeze/thaw damage and efflorescence
- Provides superior compressive and tensile strength
- Provides crack isolation properties

Advice




- To glue the Blanke • ULTRA-DRAIN on bituminous substrates, we recommend using our multipurpose waterproof adhesive Blanke • AQUA SEAL. Details regarding application can be found in the technical data sheet of Blanke • ULTRA-DRAIN.

Example of system using Blanke • ULTRA-DRAIN



Blanke • BALCONY-Gutter Quarter Circle Trim





Blanke • ULTRA-DRAIN




Blanke • AQUA SHIELD



Blanke • AQUA SHIELD 15 SA

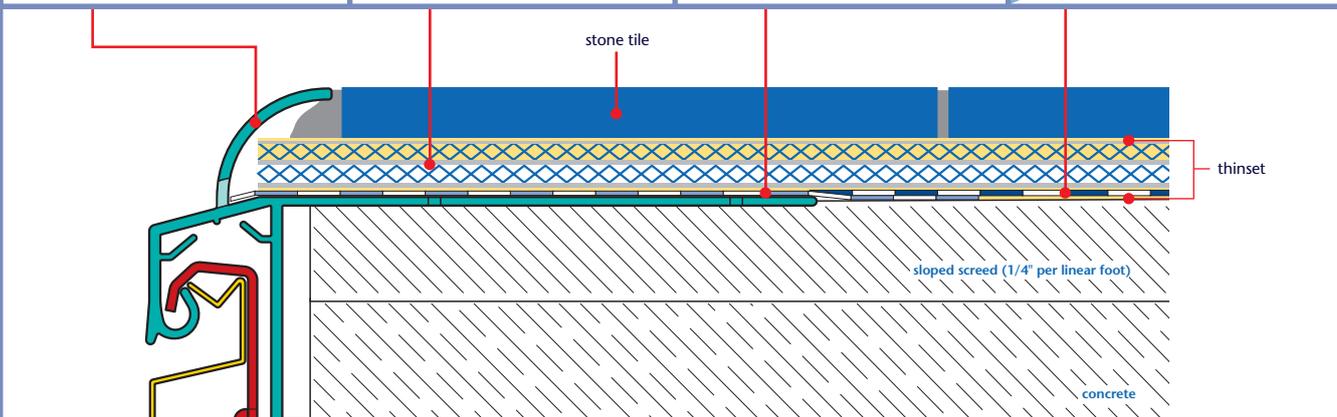

Blanke•AQUA SHIELD

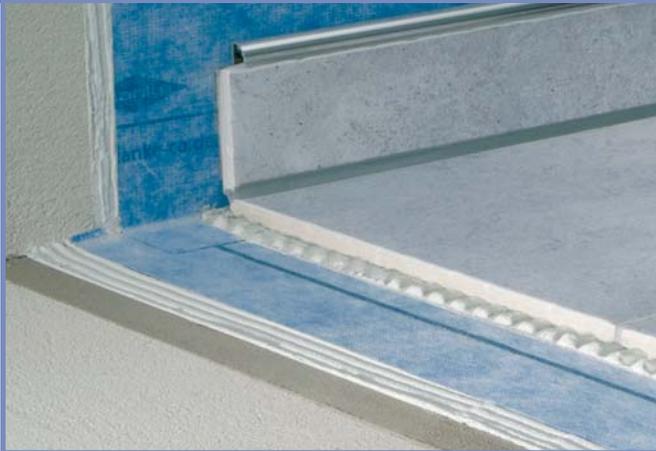

Blanke•AQUA SHIELD



Blanke•AQUA SHIELD 12,5
 Blanke•AQUA SHIELD 10 SA
 Blanke•AQUA SHIELD 15 SA




Blanke•AQUA SHIELD is a waterproofing fabric that can be applied with thinset to most surfaces that are dry, flat and structurally sound. Tile can be installed directly on fabric without the cure time required for liquid applied products. It provides a vapor barrier that makes it ideal for steam rooms. The high tensile strength of the Blanke•AQUA SHIELD ensures long lasting protection from moisture penetration in continuous wet areas such as shower stalls and bathrooms. In addition to waterproofing, the Blanke•AQUA SHIELD engineered blend of fibers also provide exceptional resistance to mold build-up; break-down from strong chemicals; and UV destabilization.

Advantages

- Light weight easy-to-install waterproofing fabric
- No waiting to install tile for wall applications
- Higher shear strength than orange alternative
- Provides vapor barrier for steamrooms
- Provides crack isolation
- Suitable for wood, wall board, backerboard and cement substrates
- Suitable for exterior application
- Seaming tapes and preformed corners available


Example of system using Blanke•AQUA SHIELD

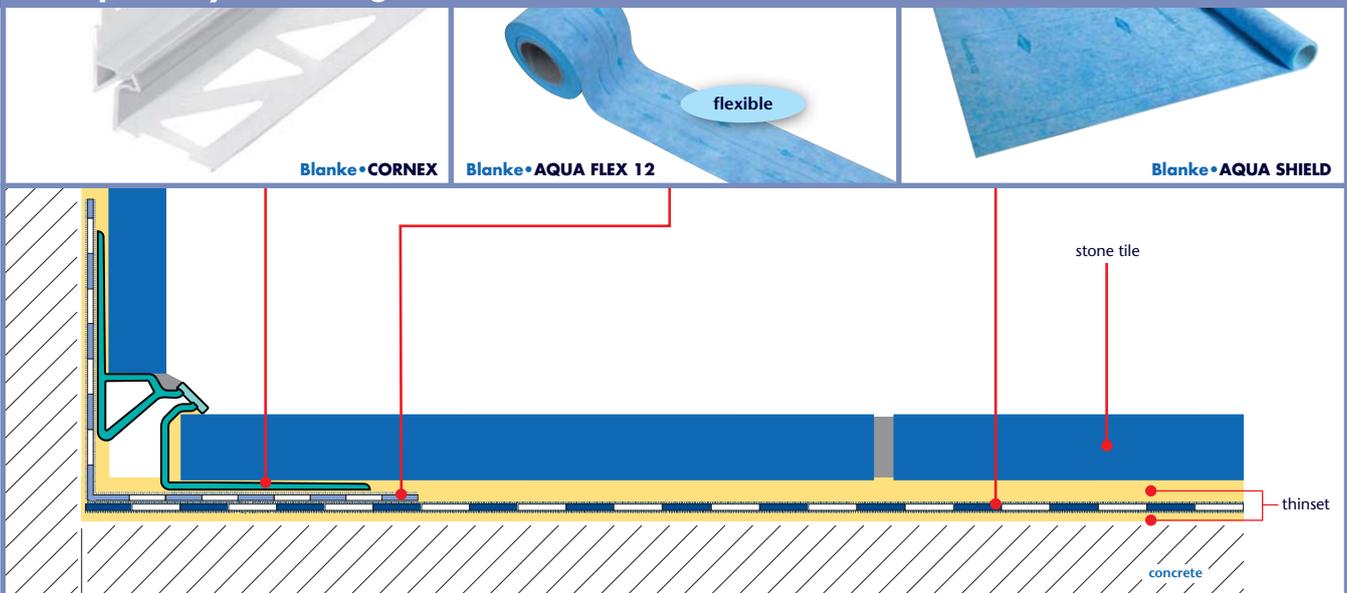

Blanke•AQUA SHIELD




Blanke•AQUA SHIELD SP

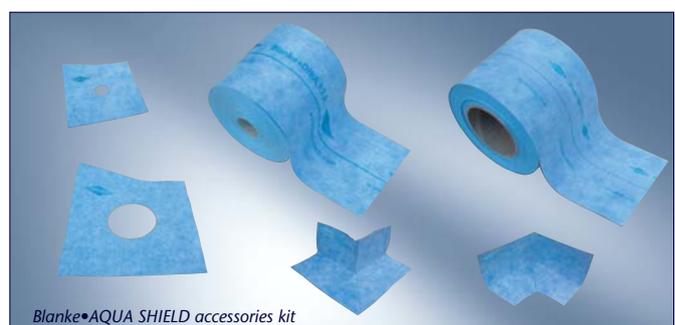

Blanke•AQUA SHIELD accessories kit

Blanke•SECURMAT

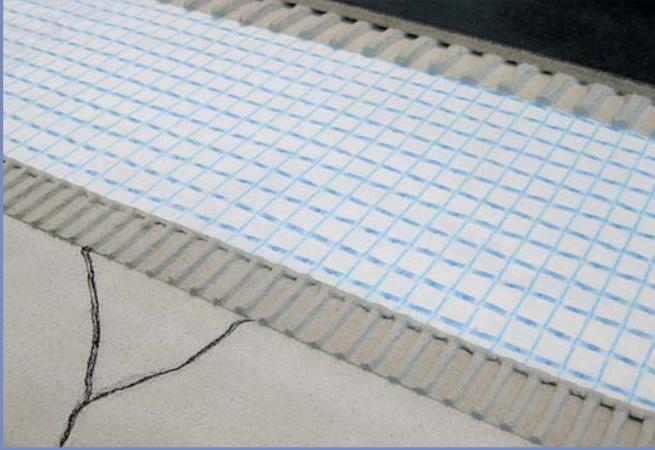

Blanke•SECURMAT is a tear-proof rolled uncoupling underlayment that provides a secure bonding surface for ceramic tile and natural stone installations on both interior floors and walls. The Blanke•SECURMAT also provides crack isolation protection that helps prevent damage to the tile covering caused by lateral substrate movement. This light weight, easy-to-install underlayment features low elevation and requires less thinset than other rolled uncoupling products. The Blanke•SECURMAT is an ideal underlayment for both new installations and for renovations over existing substrates.

Advantages


- Low elevation
- Easy to cut and install
- Uses less thinset than other uncoupling products
- Provides uncoupling crack isolation properties
- Approved for wood and cement substrates
- Approved for all tile sizes including mosaics

- Approved for use of modified thinset when installing porcelain tile

Robinson Floor Test rated
EXTRA HEAVY by the TCNA
(test report 034-10)




Example of system using Blanke•SECURMAT

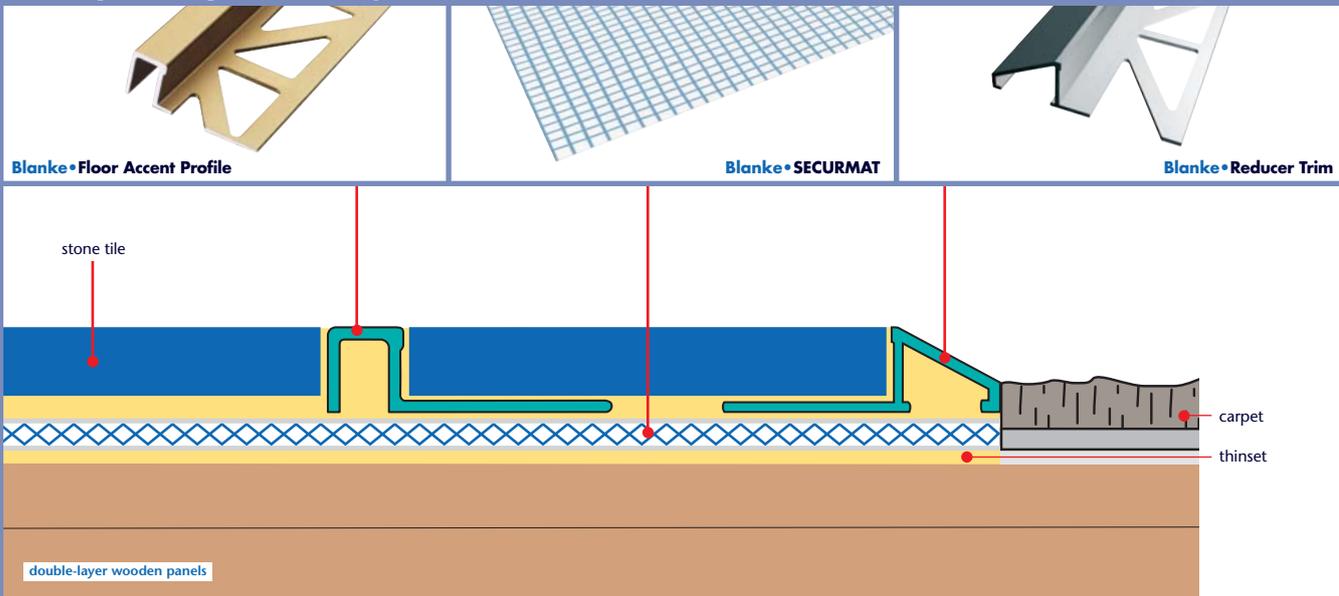



FUNCTION. DESIGN. QUALITY.

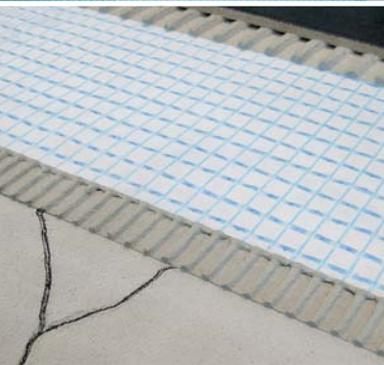

Blanke Corporation

3631 Clearview Parkway • Atlanta, Georgia 30340

Phone 770 - 936 - 9211

800 - 787 - 5055

Fax 770 - 936 - 9511

E-Mail customerservice@blankecorp.com

Internet www.blankecorp.com