

# Enclume



## FIREPLACE TOOL RACK FPTS6



**Enclume fireplace tool sets are the ultimate in quality, design, strength and function. Congratulations for owning one of the finest fireplace tool sets made.**

**WARNING:  
READ ALL OF THE INSTRUCTIONS  
BEFORE ASSEMBLING AND USING  
YOUR TOOL SET.**


Enclosed you will find everything needed for the assembly and use of your fireplace tool set.

### Hardware included:

- 6- 3/8 x 16 x 5/8 Buttonhead Screws
- 3- Hard Glides
- 1-7/32 Hex Key

### Components included:

- 3- Upright Legs
- 3- Bottom Angled Brackets
- 3- Top Angled Bracket
- 1- Broom
- 1- Shovel
- 1 - Poker

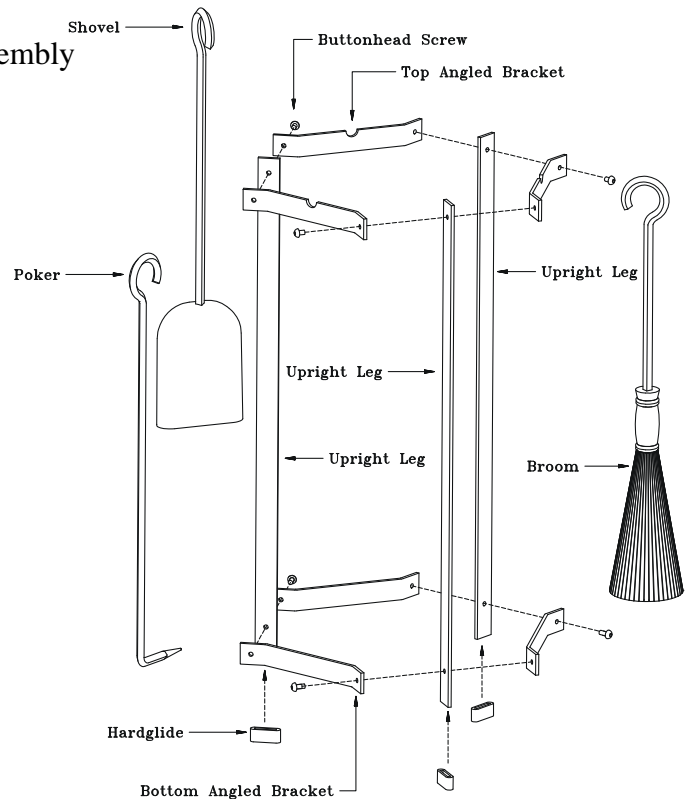

**See reverse side for ASSEMBLY AND INSTALLATION INSTRUCTIONS**




It is important that your rack is assembled correctly. If the unit is assembled or used incorrectly, it could become unstable and collapse, possibly causing injury. Natural broom straw is flammable. Keep the broom well away from open flame. It should not be used to sweep hot coals or ash.

**If you need help, please call 1-877-ENCLUME**



**Enclume Design Products, Inc.**  
24 Colwell Street, Port Hadlock, WA. 98339  
Phone 360-385-6100 • Fax 360-385-6156  
[www.enclume.com](http://www.enclume.com)

# Instructions for Assembling the FPTS6 Fireplace Tool Rack

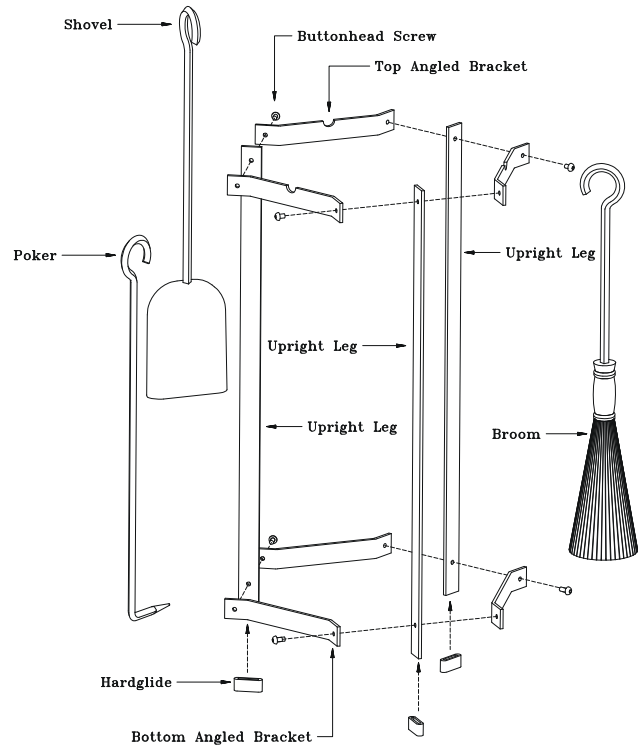

## Rack Assembly

- 1) Using a 5/8" buttonhead screw, secure two of the top angle brackets to the upright legs by positioning the brackets so that the notch is on top. Place one bracket on each side of the upright leg. Then insert the buttonhead through the large hole on the top angle bracket, the hole in the upright leg and screw into the threaded hole in the other top angle bracket. **Do not tighten fully at this point.**
- 2) Repeat this step for all of the upright legs and top angle brackets.
- 3) Turn the rack over so that the top angle brackets are now resting on the floor. Secure the bottom angle brackets in the same fashion as the top angle brackets. **Do not fully tighten at this point.**
- 4) Install the hard glides onto the upright legs by sliding them onto the upright leg bottom.
- 5) Turn the rack back to its upright position.
- 6) **Square up your rack and tighten all buttonhead screws using the hex key supplied.**
- 7) Hang all tools. Your rack is now complete.
- 8) All of our hammered steel racks are finished with an industrial acrylic finish to give years of protection to the rack. Cleaning is easily done with a damp cloth. Dry thoroughly after cleaning. If a touch-up is ever needed we recommend a "Pledge" like wax product.



It is important that your rack is assembled correctly. If the unit is assembled or used incorrectly, it could become unstable and collapse, possibly causing injury. Natural broom straw is flammable. Keep the broom well away from open flame. It should not be used to sweep hot coals or ash.

**Limited Warranty:** This product is warranted to be free of material defects for a period of five year from the date of purchase. Customer's exclusive remedy shall be the repair or replacement of the defective product and shall be subject to the following conditions: (1) notice of any defect is received by Enclume within the warranty period and (2) customer returns the defective product to Enclume Design Products, Inc., 24 Colwell St., Port Hadlock, WA 98339, *postage prepaid* within 20 days following a return authorization number (which may be obtained by telephoning the number at the bottom of this instructions) being provided to the customer by Enclume. There are no other warranties, expressed or implied. **THERE ARE NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ENCLUME SPECIFICALLY DISCLAIMS ANY AND ALL INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE PURCHASE OR USE OF ENCLUME'S PRODUCTS.**



If you need help, please call 1-877-ENCLUME

**Enclume Design Products, Inc.**  
24 Colwell Street, Port Hadlock, WA. 98339  
Phone 360-385-6100 • Fax 360-385-6156  
[www.enclume.com](http://www.enclume.com)