

Jason International, Inc.
8328 MacArthur Drive
North Little Rock, AR 72118
www.jasoninternational.com



49-1013-000
Date 04/11

OWNER'S MANUAL

Integrity® Soaking Baths

INSTALLATION, OPERATION, AND MAINTENANCE



If the carton shows sign of damage, inspect the product before accepting and describe the problem on the Bill of Lading.

INSPECTION

Inspect the unit prior to installation. In the event of a problem, DO NOT install the unit.

All components are factory assembled to the bath and the unit is water tested and inspected prior to leaving Jason International, Inc.

If the carton shows sign of damage, inspect the product before accepting and describe the problem on the Bill of Lading.

NOTE: Transportation and insurance from Jason's factory are the buyer's responsibility.

Damage sustained in transit is the responsibility of the carrier. If damage is discovered, The carrier must be immediately notified in writing with a request for a representative to inspect the unit. Failure of the carrier to respond should be reported to the seller and carrier. Always file a freight claim promptly.

The installer is responsible for insuring that the unit is free from defects or shipping damage. In the event of a problem, DO NOT install the unit. Jason International is not responsible for damage that

might have been avoided by inspection or testing prior to installation.

Damage to the unit during installation will not be covered by warranty and is the responsibility of the installer. ALL WARRANTY CLAIMS ON ACRYLIC SURFACE DAMAGE MUST BE MADE PRIOR TO INSTALLATION. Inspect plumbing and bath surface for missing or damaged components. Alert your dealer of any discrepancies.

To protect the unit from damage keep the bath in the carton until ready for installation.

EQUIPMENT ACCESS

In accordance with Building Codes, service access to all therapy bath equipment, controls and electrical connections must be provided during installation. (Refer to **Table 1 - Specifications** for minimum access size.) Insufficient access will hinder repair and maintenance. Warranty service will not cover the cost of providing equipment access.

Jason offers an optional removable lateral skirt for all rectangular baths. The skirts are available in matching acrylic colors and provide convenient access to bath equipment as well as an excellent finished appearance.

OWNER'S RECORD

Dealer: _____

Date Purchased: _____

Date Installed: _____

Installer: _____

**PLACE SERIAL NUMBER CARD WITH
PRODUCT CONFIGURATION IN THIS BOX**



INSTALLATION INSTRUCTIONS

| INTEGRITY COLLECTION (Soaking Bath) | | | | | | | |
|-------------------------------------|--------------------|---|-----|--------------------|---------------|-----|------|
| Model | Overall Dimensions | | | Operating Capacity | Floor Loading | | |
| | L x W x H (in.) | | | Gallons | lbs/ft2 | | |
| | L x W x H (cm.) | | | Liters | kg/M2 | | |
| A6060 | 60 | x | 60 | x | 20.5 | 53 | 39.7 |
| | 152 | x | 152 | x | 52 | 201 | 194 |
| B3060 TL | 60 | x | 30 | x | 20.5 | 29 | 45.6 |
| | 152 | x | 76 | x | 52 | 110 | 223 |
| B3260 TL | 60 | x | 32 | x | 20.5 | 32 | 45.4 |
| | 152 | x | 81 | x | 52 | 121 | 222 |
| B3260 SL/SR | 60 | x | 32 | x | 20.5 | 32 | 47.1 |
| | 152 | x | 81 | x | 52 | 121 | 230 |
| B3660 | 60 | x | 36 | x | 20.5 | 37 | 43.9 |
| | 152 | x | 91 | x | 52 | 140 | 214 |
| B3660 SL/SR | 60 | x | 36 | x | 20.5 | 37 | 45.4 |
| | 152 | x | 91 | x | 52 | 140 | 222 |
| B3666 | 66 | x | 36 | x | 20.5 | 39 | 41.5 |
| | 168 | x | 91 | x | 52 | 148 | 203 |
| B3672 | 72 | x | 36 | x | 20.5 | 45 | 42 |
| | 183 | x | 91 | x | 52 | 170 | 205 |
| B3672 SL/SR | 72 | x | 36 | x | 20.5 | 45 | 43.9 |
| | 183 | x | 91 | x | 52 | 170 | 214 |
| B4260 | 60 | x | 42 | x | 20.5 | 44 | 42.2 |
| | 152 | x | 107 | x | 52 | 167 | 206 |
| B4260 SL/SR | 60 | x | 42 | x | 20.5 | 44 | 43.3 |
| | 152 | x | 107 | x | 52 | 167 | 211 |
| B4272 | 72 | x | 42 | x | 20.5 | 49 | 38.1 |
| | 183 | x | 107 | x | 52 | 185 | 186 |
| B4272 SL/SR | 72 | x | 42 | x | 20.5 | 49 | 40.2 |
| | 183 | x | 107 | x | 52 | 185 | 196 |
| C6060 | 60 | x | 60 | x | 20.5 | 54 | 40 |
| | 152 | x | 152 | x | 52 | 204 | 195 |
| D3260 | 60 | x | 32 | x | 20.5 | 36 | 48.6 |
| | 152 | x | 81 | x | 52 | 136 | 237 |
| J4260 | 60 | x | 42 | x | 20.5 | 43 | 42.4 |
| | 152 | x | 107 | x | 52 | 163 | 207 |
| J4266 | 66 | x | 42 | x | 20.5 | 46 | 40.3 |
| | 168 | x | 107 | x | 52 | 174 | 197 |
| J4272 | 72 | x | 42 | x | 20.5 | 49 | 38.5 |
| | 183 | x | 107 | x | 52 | 185 | 188 |
| K3060 | 60 | x | 30 | x | 20.5 | 38 | 53.3 |
| | 152 | x | 76 | x | 52 | 144 | 260 |
| K3060 TL | 60 | x | 30 | x | 20.5 | 38 | 53.5 |
| | 152 | x | 76 | x | 52 | 144 | 261 |
| K3060 SL/SR | 60 | x | 30 | x | 20.5 | 38 | 55.3 |
| | 152 | x | 76 | x | 52 | 144 | 270 |
| K3260 | 60 | x | 32 | x | 20.5 | 39 | 50.9 |
| | 152 | x | 81 | x | 52 | 148 | 249 |

| INTEGRITY COLLECTION (Soaking Bath) | | | | | | | |
|-------------------------------------|--------------------|---|-----|--------------------|---------------|-----|------|
| Model | Overall Dimensions | | | Operating Capacity | Floor Loading | | |
| | L x W x H (in.) | | | Gallons | lbs/ft2 | | |
| | L x W x H (cm.) | | | Liters | kg/M2 | | |
| K3260 TL | 60 | x | 32 | x | 20.5 | 39 | 51.1 |
| | 152 | x | 81 | x | 52 | 148 | 250 |
| K3260 SL/SR | 60 | x | 32 | x | 20.5 | 39 | 52.8 |
| | 152 | x | 81 | x | 52 | 148 | 258 |
| K3666 | 66 | x | 36 | x | 20.5 | 48 | 47.2 |
| | 168 | x | 91 | x | 52 | 182 | 230 |
| K3666 TL | 66 | x | 36 | x | 20.5 | 48 | 47.3 |
| | 168 | x | 91 | x | 52 | 182 | 231 |
| K3666 SL/SR | 66 | x | 36 | x | 20.5 | 48 | 48.7 |
| | 168 | x | 91 | x | 52 | 182 | 238 |
| L4872 | 72 | x | 48 | x | 20.5 | 56 | 36.8 |
| | 183 | x | 122 | x | 52 | 212 | 180 |
| N3660 | 60 | x | 36 | x | 20.5 | 44 | 53.7 |
| | 152 | x | 91 | x | 52 | 167 | 262 |
| N4260 | 60 | x | 42 | x | 20.5 | 49 | 45.3 |
| | 152 | x | 107 | x | 52 | 185 | 221 |
| N4272 | 72 | x | 42 | x | 20.5 | 52 | 44.9 |
| | 183 | x | 107 | x | 52 | 197 | 219 |
| V4266 | 66 | x | 42 | x | 20.5 | 43 | 41.4 |
| | 168 | x | 107 | x | 52 | 163 | 202 |
| V4272 | 72 | x | 42 | x | 20.5 | 46 | 40.1 |
| | 183 | x | 107 | x | 52 | 174 | 196 |
| W4266 | 66 | x | 42 | x | 20.5 | 40 | 39.7 |
| | 168 | x | 107 | x | 52 | 151 | 194 |

INSTALLATION

Follow these instructions to install the soaking bath vessel, overflows, fill spouts, and faucetry. Electrical connection is not needed.

See the **USER MAINTENANCE INSTRUCTIONS** of this owner's manual for humidity and mold prevention suggestions prior to Installation.

1. Finish Frame

- a. Construct a finish frame under the bath rim to support the bath lip and keep the bath deck level, which will assist any water draining from the deck of the bath into the well of the bath. This frame is not intended to support the full bath weight.

If a lateral skirt is to be used on the bath, the **bath deck** must be leveled at the correct clearance from the support foundation (flooring) depending on the model, or the skirt will not fit properly.

Apply 100% Silicone with water resistant properties between the water resistant backer board and the deck of the bath. See Figure 1.

NOTE: Soaking bath vessels without an integral tile flange or tile flange kit (TFK) are not to be installed against the wall.

NOTE: If you have purchased a model with an integral skirt and tile flange; factory installed lateral skirt; integral tile flange; or an optional tile flange kit, modify the framing to support the bath lip as shown in Figure 2.

2. Rough-in the plumbing for the drain and overflow assembly. At this time also plan for the position and mounting of the faucet set as well as all related plumbing. All overflow drains, fill spouts, and valves must be installed according to the instructions in this manual.

Figure 1


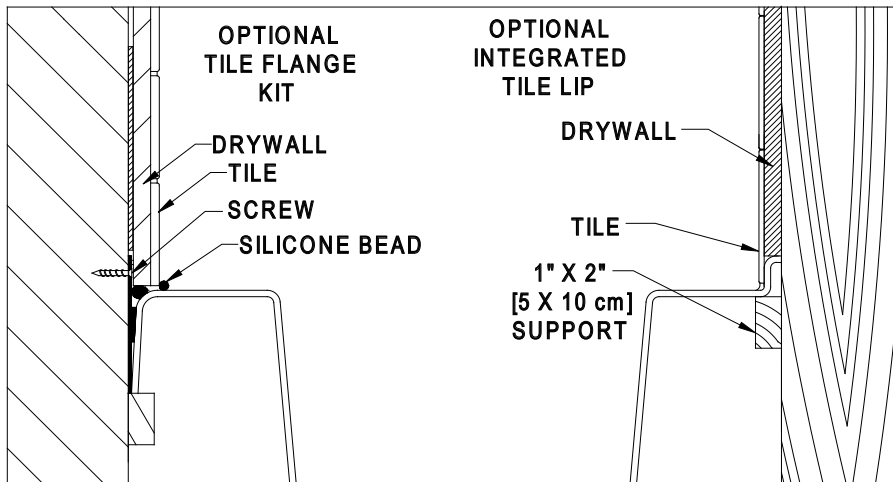


Figure 2

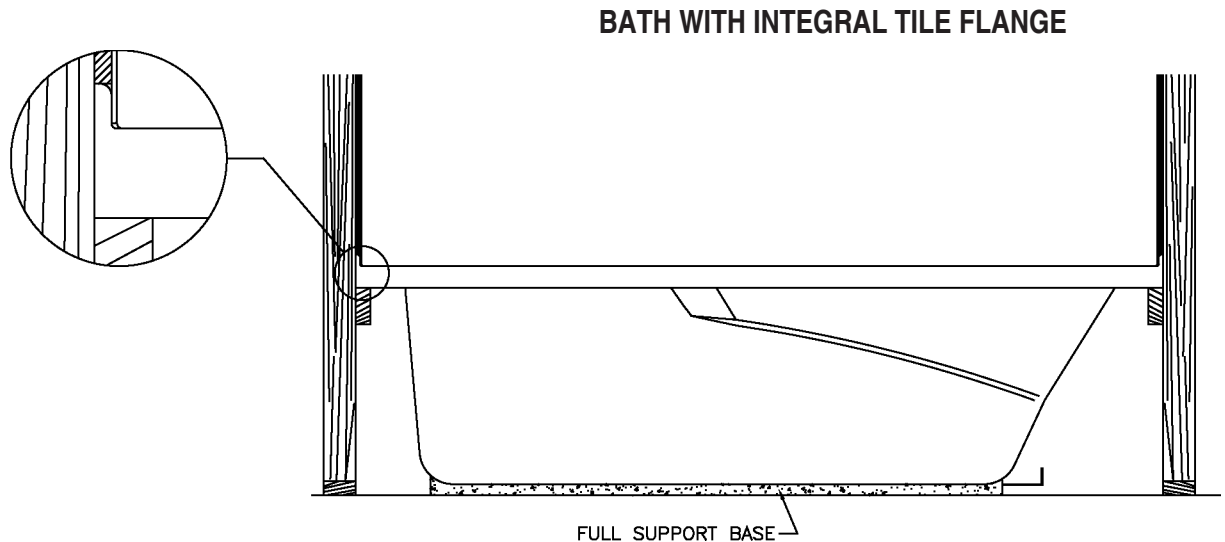

3. Level the bath and remove packing board:

- a. **Install the bath level for proper drainage.** Jason baths are designed to be supported under the entire base of the bath. If the floor is smooth and level, the bath's Level-Form™ base will provide proper drainage and support (see **Figure 2**). Mortar is required when the subfloor is not smooth and level; when additional sound insulation is desired; and/or when the bath is installed in a drop-in application. In alcove installations a bed of mortar is recommended to aid in leveling the bath. **NOTE: Do not use sand to install or level the bath.**
 - b. **Remove the packing board before installing the bath.** Some soaking bath models may be shipped with a packing board which must be removed before installation. **Detach the packing board from the bath.**
4. **Protect the acrylic bath surface from damage during installation with a suitable material, i.e., cardboard and/or plastic film.**
 5. **Install the drain and overflow assembly** onto the bath according to the instructions provided with the assemblies. Position the bath in the area of intended installation.

CLEANING

1. **Remove all loose debris.** Construction plaster or excess grout can be removed with the use of a wooden-edged trowel.
2. **Paint or tar stains** can be removed with paint thinner, turpentine, or isopropyl alcohol (rubbing alcohol). Never allow the cleaner to soak against the acrylic surface for long periods of time. **Always rinse the surface immediately** following the use of cleaners.

NOTE: Follow the manufacturers instructions for safe use of cleaning products. If the surface becomes scratched or dulled, it may be restored by using a quality plastic polish, like Novus Plastic Polish No. 2 (available from the Jason Dealer). It is always preferable to protect the acrylic surface during installation to minimize cleanup and prevent surface damage.

WATER TESTING

Before finishing the installation, it is recommended that the bath and plumbing tested for leaks.

1. **Fill and operate the bath.** Close the drain and fill the bath with at least two (2) inches of water. The incoming water temperature should not exceed 104°F (40°C).
2. **Inspect the plumbing for leaks.**

USER MAINTENANCE INSTRUCTIONS

HUMIDITY

WARNING: AVOID HIGH HUMIDITY LEVELS IN YOUR HOME. MOLD, MILDEW, FUNGI, AND BACTERIA WHICH MAY BE HARMFUL TO HEALTH THRIVE IN AREAS WITH CONTINUED HIGH HUMIDITY LEVELS; THEREFORE, EVERY PRECAUTION SHOULD BE TAKEN TO MAKE SURE YOUR PLUMBING FIXTURES INCLUDING BATHTUBS, THERAPY BATHS OR SHOWERS DO NOT BECOME A SOURCE OF HIGH HUMIDITY DUE TO IMPROPER INSTALLATIONS OR LEAKS.

To avoid having your plumbing fixtures become a source of unwanted humidity, please make sure the following steps are taken prior to installation.

1. Make sure the area where the bathtub or shower is installed is well vented and allows enough ventilation and air circulation to dry the bathroom environment within a short time after taking a bath or shower.
2. If your bath or shower unit is tiled-in, use units with an integral tile flange or make sure a tile flange kit or a similar mechanical barrier is installed to prevent shower spray, splash, or overflow to leak behind the bathtub.
3. Make sure the plumber properly tests your therapy bath before it is roughed in to make sure there are no leaks and it is installed with proper access to bath equipment.
4. Make sure that all the plumbing and fixtures in the bathroom are in good working order and have no leaks.
5. Do not use carpeting or other materials or furniture (which can hold moisture) in your bathroom.
6. Use disinfectant to clean any bathroom surfaces, which are regularly exposed to moisture.
7. Clean and disinfect humidifier and dehumidifiers as recommended by the manufacturer. Replace the air filter on the HVAC unit once a month.
8. Clean moldy surfaces as soon as any mold appears by using a detergent/soapy solution and appropriate household cleaner. Always use gloves during cleaning. Dispose of any sponges or rags used to clean mold.

CLEANING

With minimum care, the soaking bath's acrylic-surface will retain its high luster finish for many years. For regular cleaning use a mild NON-ABRASIVE liquid detergent solution (i.e., Jason Bath System Cleaner or a glass cleaner) and a soft, wet cloth or sponge. Do not allow the cleaning solution to soak against the acrylic surface for long periods of time. Rinse the bath thoroughly after cleaning.

ACRYLIC SURFACE MAINTENANCE

Areas with minor scratches or dull surfaces can be restored by applying commercially available plastic polish (i.e. Novus Plastic Polish No. 2, available from a Jason dealer), followed by an application of acrylic paste wax. Buff the surface with a clean soft cloth.

CAUTION: Do not use sandpaper, steel wool, or abrasive rubbing compounds.

If scratches are too deep to rub out, or if the damage penetrates the acrylic surface, consult the dealer for recommendations on surface repair.

REPAIR

Refer all plumbing or surface repair to a qualified service technician.

When contacting the dealer or service representative, always have the serial number, proof of purchase, and model number available. This will insure a quick response on warranty items. The serial number can be found on the front page of this manual or on the small card adhered to the back of the bath. **ALL WARRANTY REPAIRS MUST BE AUTHORIZED BY THE MANUFACTURER BEFORE WORK IS STARTED.**

WARRANTY REGISTRATION: Register your product's warranty online at www.jasoninternational.com.

JASON INTERNATIONAL INC. LIMITED WARRANTY

The Company warrants the products of its own manufacture to be free from defects in workmanship and material for a period of twelve (12) months from date of installation or eighteen (18) months from date of manufacture, whichever comes first. Any merchandise which upon Company examination proves to be defective under normal use and service during the warranty period will be at the Company's option repaired, replaced or credit issued in the amount of the invoice value of the defective merchandise. All other types of remedies are excluded. This warranty extends only to the owner of the originally installed merchandise. The Company is not responsible for labor or other installation costs for the repair or replacement of defective merchandise. Company reserves the right to substitute new or improved equipment on any replacements. The repair or replacement of equipment shall be F.O.B. point of shipment.

This warranty shall not apply to any merchandise which has been subject to accident, alteration, abuse, misuse, abrasives, corrosion and/or electrolysis, improper voltage supply, misapplication, careless handling, improper installation, maintenance, abnormal chemical conditions, nor does this warranty cover stains, discoloration or the fading of color due to improper use of chemicals or improperly maintained water chemistry.

This warranty shall not apply to any merchandise or parts thereof which were not manufactured by Company. Such product or merchandise manufactured by others shall have only such warranties, in writing, that may be extended and in force at the time by such other manufacturer or supplier.

To obtain warranty service, you must contact the retailer from which the merchandise was purchased or Company's distributor in your area. Written notice of warranty defects must be given to the company within thirty (30) days from the occurrence thereof. Written permission must be obtained by the retailer or distributor from the Company before any equipment claimed defective is returned for inspection.

EXCEPT AS PROVIDED HEREIN, COMPANY MAKES NO WARRANTIES EITHER EXPRESSED OR IMPLIED, AS TO ANY MATTER WHATSOEVER INCLUDING THE CONDITION OF THE MERCHANDISE, ITS MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ANY WARRANTIES IMPLIED BY LAW AND NOT EFFECTIVELY EXCLUDED BY THIS WARRANTY, ARE LIMITED TO THE DURATION AND REMEDIES OF THIS WARRANTY. IN NO EVENT SHALL THE COMPANY BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you.

This warranty gives you specific legal rights and you may also have other rights that vary from state to state.

IMPORTANT SAFETY INSTRUCTIONS

INSTRUCTIONS PERTAINING TO THE RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS.

WARNING: When using this unit, basic precautions should always be followed, including the following:

This manual contains information and instructions for proper operation and maintenance of your bath. Failure to follow these instructions could result in personal injury, electrical shock or fire.

READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY

DANGER: TO REDUCE THE RISK OF INJURY FOLLOW THESE PRECAUTIONS:

- A. Do not permit children to use this product unless they are closely supervised at all times.
- B. Use this unit only for its intended use as described in this manual. Do not use attachments not recommended by the manufacturer.
- C. The water in a bath should never exceed 40°C (104°F). Water temperatures between 38°C (100°F) and 40°C (104°F) are considered safe for a healthy adult. Use time should be limited to approximately 30 minutes, followed by a shower to cool down. Longer exposures may result in hyperthermia. The symptoms of this condition are nausea, dizziness, and fainting, and it can be fatal. Lower water temperatures are recommended for extended use (exceeding 10 -15 minutes) and for young children.
- D. Since excessive water temperatures have a high potential for causing fetal damage during the early months of pregnancy, pregnant or possibly pregnant women should limit bath water temperatures to 38°C (100°F).
- E. The use of drugs or alcoholic beverages before or during bath use may lead to unconsciousness with the possibility of drowning. Never use the bath while under the influence of alcohol, anticoagulants, stimulants, antihistamines, vasoconstrictors, vasodilators, hypnotics, narcotics, or tranquilizers.
- F. Persons with a medical history of heart disease, low or high blood pressure, circulatory system problems, or diabetes should consult a physician before using a soaking bath.
- G. Persons using medication should consult a physician before using a soaking bath since some medication may induce drowsiness while other medication may affect heart rate, blood pressure, and circulation.

DANGER: To reduce the risk of injury, enter and exit the bath slowly.

WARNING: Never operate electrically connected devices in or near the bath.

Electrical outlets in the bath area must be connected to a supply circuit that is protected by a GFCI. Such a device should be installed by a licensed electrician and should be tested on a regular basis (at least monthly). To test the GFCI, push the **TEST** button. The GFCI should interrupt the power. Push the **RESET** button and the power should be restored. If the GFCI fails to operate in this manner, there is the possibility of an electric shock. **DO NOT USE.** Disconnect the unit and have the problem corrected by a qualified service technician.

To avoid the possibility of personal injury and discoloration of the acrylic surface, the inlet water temperature should not exceed 40°C (104°F). The bath should be drained after each use. Each bather should start their bath with fresh water. Do not use oil base additives in your whirlpool bath.

CAUTION: Do not use harsh abrasives or solvents for cleaning this unit.

INSTALLER/OWNER BEARS ALL RESPONSIBILITY TO COMPLY WITH ALL STATE AND LOCAL CODES WHEN INSTALLING THIS PRODUCT.

SAVE THESE INSTRUCTIONS

JASON INTERNATIONAL, INC.

8328 MacArthur Drive • North Little Rock • Arkansas • 72118

www.jasoninternational.com