88521695 C Solid Wood Top Kitchen Island

Attention!

Our customers will always get the perfect products, if they strictly follow the assembly instructions.

Thank you for purchasing our quality products.





Part List Α. B. C. D. Top Side Frame Side Frame Front Rail 1 pc. 1 pc. 1 pc. 2 pcs. Ε. G. H. **Back Rail** Base Shelf 1 pc. 1 pc. 1 pc. I. Drawer F. J. (Knock-Down Construction, please refer to Divider Side Bar the page (4/4) of these instructions for 1 pc. 1 pc. steps to complete assembling drawers) 2 drawers Hardware List 鸖 Wood Screw **Machine Screw** Head Cap Bolt (short) Short 6 x 1/2" Wood Plug for Pull Handle (for Side Bar) (for Drawer Bottom Part) Supporting Pin 13 pcs. 4 pcs. 2 pcs. (+1 Extra) 12 pcs.(+1 Extra) 4 pcs. (+1 Extra) (+1 Extra) Wood Screw (Caster Long 6 x 1" Two casters with lock **Hex Wrench** Head Cap Bolt (for Drawer Side Part) **Pull Handle** Two casters without lock 1 pc. 19 pcs. (+1Extra) 16 pcs.(+1 Extra) 4 pcs. 2 pc.

Tools Required For Assembly : Philips screwdriver

Assembly Instructions 2/4

IMPORTANT


Do not tighten up all the screws until each part is properly assembled. You should keep Hex Wrench in the safe place as you may need to tighten up the Head Cap Bolts in the future.


STEP 1

Turn the Side Frame (B) upside down on the soft material.


Attach the locking caster to the leg with **†**sign, and the non-locking caster to the other leg.

Do the same for the Side Frame (C).



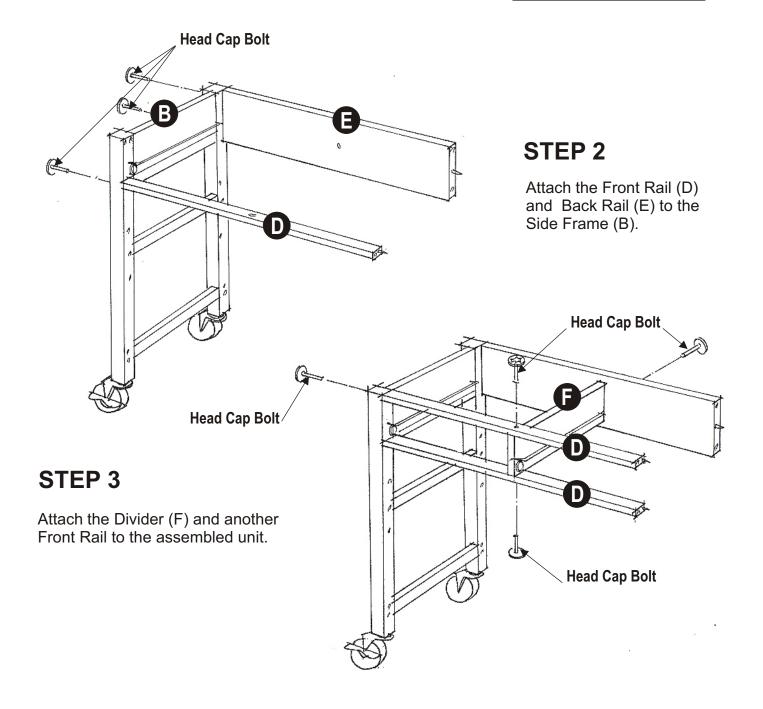

Assembly Instructions 3/4

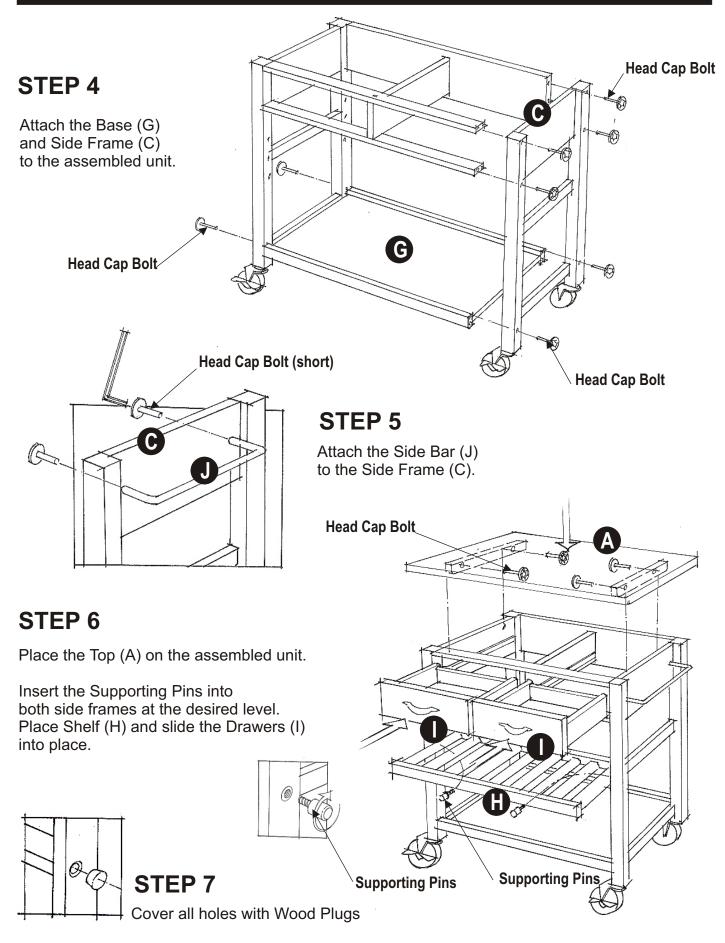

Drawer

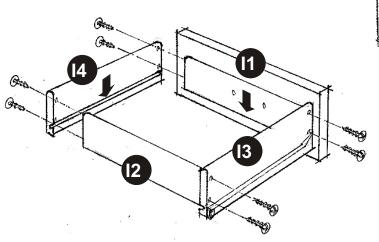


Figure 2

Turn the assembled drawer over and slide the Plywood Bottom Part (I5) into the grooves of Side Parts (I3) and (I4). Be sure to push the plywood bottom part all the way forward, so it meets the Front Part (I1).

Insert the remaining $\frac{1}{2}$ " screws (6 pcs.) into the pre-drilled holes at the Bottom Part (I5), then tighten up all screws

Slider Wheel

Figure 1

Line up Side Parts (I3) and (I4) to the Front Part (I1) and Back Part (I2). Make sure the J sign on each part is going down. Using a <u>Philips</u> screwdriver, insert 1" screws into each of the 4 pre-drilled holes on the sides (I3) and (I4), then tighten half way.






Figure 3

Assemble the Pull Handle to the Front Part (I1) with Machine Screw.



* If you are missing any of these parts, please contact our DMI Customer Service Department at 1-877-831-0319 or fax us at 1-800-755-2878.

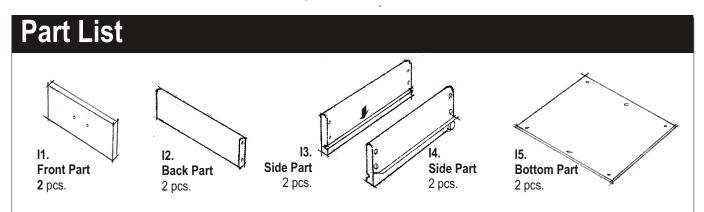

Assembly Instructions 4/4