



**No Tools  
Required!**

## ASSEMBLY INSTRUCTIONS

**All you need is two people and thirty minutes!**

You can also view our easy assembly video on [sofab.com](http://sofab.com)

or call Toll Free: **877-534-9804**

**NOTE:** Every sofa and loveseat is constructed in the same manner so your style and cover may vary from the color and style shown on these instructions.



**1**

Carefully open your box and lay all of the parts on a flat surface. Be sure to remove the parts from the seat box cavities.

**2**

Verify that all parts are included for your item.

**10 Hand Bolts - #1**



**3 Back Cushion Covers - #2**



**2 Sofa Arms - #3**



**2 Wing Nuts - #4**



**4 Wooden Legs - #7**



**2 Sofa Seat Boxes - #5**



**3 Compressed Seat Cushions - #6**



**1 Center Frame Support - #8**




**3 Sofa Seat Covers - #9**



**3 Compressed Back Cushions - #10**



**2 Sofa Backs - #11**

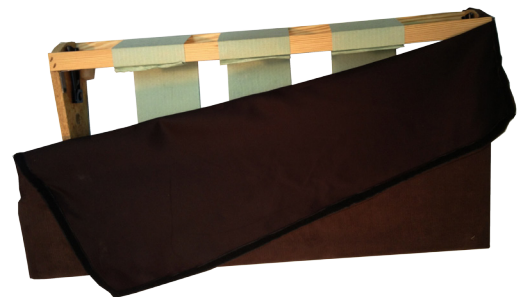

**Caution: This product is built using quality materials and craftsmanship. It is intended to give years of use when used properly.**

The maximum weight limit for this product is 350 pounds per seat. (158.76 kg)

This product is intended for home use and not intended for commercial use.

Estimated assembly time is 30 minutes using 2 people to assemble.

Never push or drag your furniture across the floor (especially carpet).






**3**

Carefully cut open the bags with the compressed back cushions (#6) and compressed seat cushions (#10) — they will expand as you are inserting them into the back covers (#2) and the seat covers (#9), making the insertion easy!




Insert cushions into seat covers and back covers.

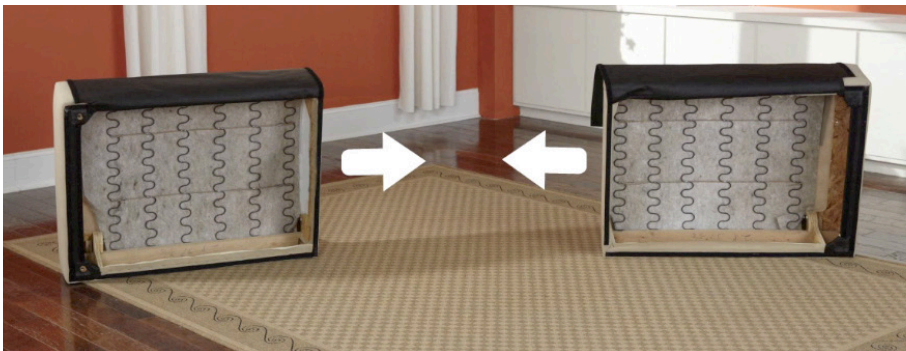

**4**

Place the seat boxes (#5) on the floor on their angled back rail and slide them together. The seat boxes will be secured together by putting one black hand bolt (#1) into the top hole. Place the center frame support (#8) over the inside edges where the seat boxes meet at the bottom. Secure the center frame support by putting two black hand bolts (#1) through the holes of the support and box. Put the two wing nuts (#4) on each screw end of the two black hand bolts and tighten securely.

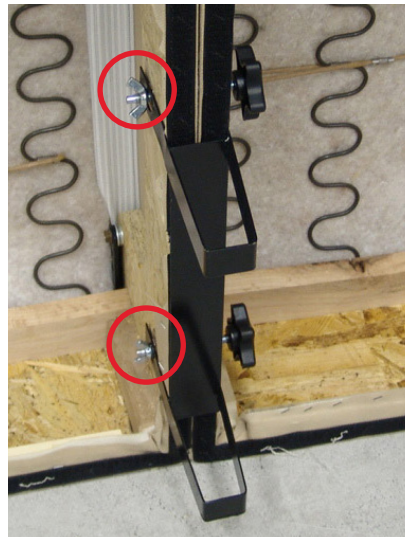





5

Attach the arms (#3) to the seat boxes (#5) with the loose cover on the outside — attach each arm with two black hand bolts (#1), making them flush with the sides of the seat box (#5).




6

Pull the arm fabric down and press the hook and loop together, attaching it to the seat box (#5) — then close the black dustcover by securing it to the seat box hook and loop.



7

Locate the front side of the sofa backs using the A & B stickers. Place the sofa backs (#11) onto the seat boxes by sliding the female back connector into the male seat connector — you will hear a click with proper insertion — secure with three black hand bolts (#1) — one into each arm and one to secure the two backs together — pull down fabric backs, press the hook and loop together, attaching them to the seat box (#5).

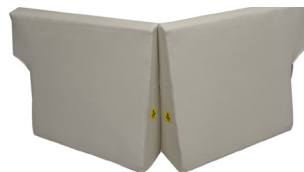



8

Attach four wood legs (#7) by placing their bolts into the embedded T-nuts on the base of the seat box corners (#5), twisting the legs until secure and straight — you may need to hold the fabric down around the T-nut while you twist the legs into place.



9

Insert the back cushions and the seat cushions.

**RELAX and enjoy your new sofa!**