


CUPOLE (80) design Giò Colonna Romano



Lampada a sospensione Anno di produzione: 2003 Versioni: luminosa, laccata. Materiali: Polietilene. Dimensioni: Ø 80 h 40 cm Peso: 10 Kg Imballaggio: 81 x 81 x 52 cm Volume imballaggio: 0,341 m³ Suspension Année de production: 2003 Versions: lumineuse, laquée. Matériaux: Polyéthilène. Dimensions: Ø 80 h 40 cm Poids: 10 Kg Emballage: 81 x 81 x 52 cm Volume emballage: 0,341 m³ Hanging lamp Year of production: 2003 Versions: lighting, lacquered. Material: Polyethylene. Dimensions: Ø 80 h 40 cm Weight: 10 Kg Packaging: 81 x 81 x 52 cm Packaging volume: 0,341 m³




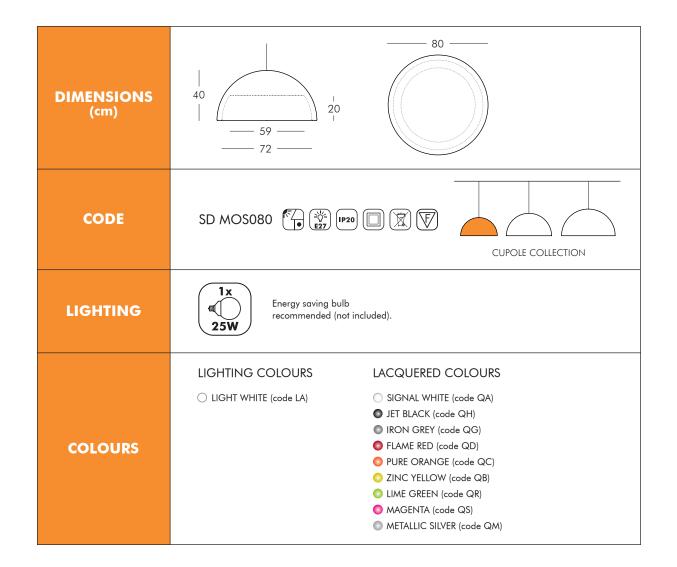

CUPOLE (120) design Giò Colonna Romano



Lampada a sospensione Anno di produzione: 2003 Versioni: luminosa, laccata. Materiali: Polietilene. Dimensioni: Ø 120 h 60 cm Peso: 21 Kg Imballaggio: 121 x 121 x 63 cm Volume imballaggio: 0,922 m³ Suspension Année de production: 2003 Versions: lumineuse, laquée. Matériaux: Polyéthilène. Dimensions: Ø 120 h 60 cm Poids: 21 Kg Emballage: 121 x 121 x 63 cm Volume emballage: 0,922 m³ Hanging lamp Year of production: 2003 Versions: lighting, lacquered. Material: Polyethylene. Dimensions: Ø 120 h 60 cm Weight: 21 Kg Packaging: 121 x 121 x 63 cm Packaging volume: 0,922 m³

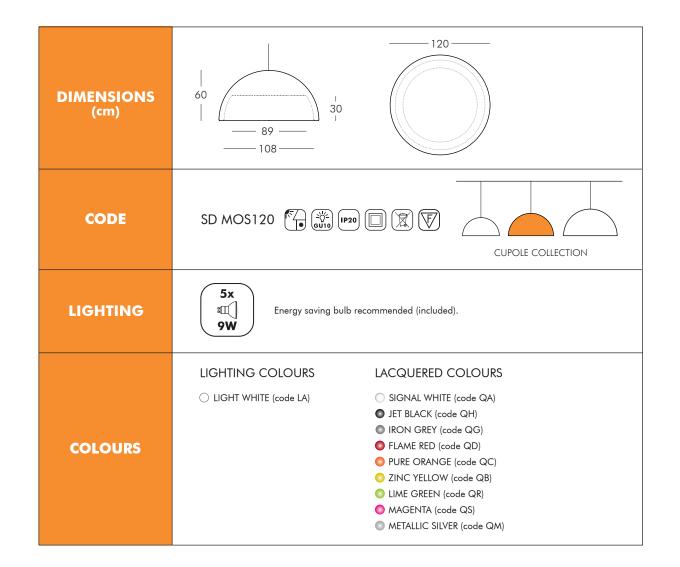



CUPOLE (200) design Giò Colonna Romano



Lampada a sospensione Anno di produzione: 2003 Versioni: luminosa, laccata. Materiali: Polietilene. Dimensioni: Ø 200 h 100 cm Peso: 91 Kg Imballaggio: 202 x 202 x 150 cm Volume imballaggio: 6,121 m³


Note: imballaggio senza scatola.

Suspension Année de production: 2003 Versions: lumineuse, laquée. Matériaux: Polyéthilène. Dimensions: Ø 200 h 100 cm Poids: 91 Kg Emballage: 202 x 202 x 150 cm Volume emballage: 6,121 m³

Note: pas de boîte d'emballage.

Hanging lamp Year of production: 2003 Versions: lighting, lacquered. Material: Polyethylene. Dimensions: Ø 200 h 100 cm Weight: 91 Kg Packaging: 202 x 202 x 150 cm Packaging volume: 6,121 m³


Note: no box packaging.

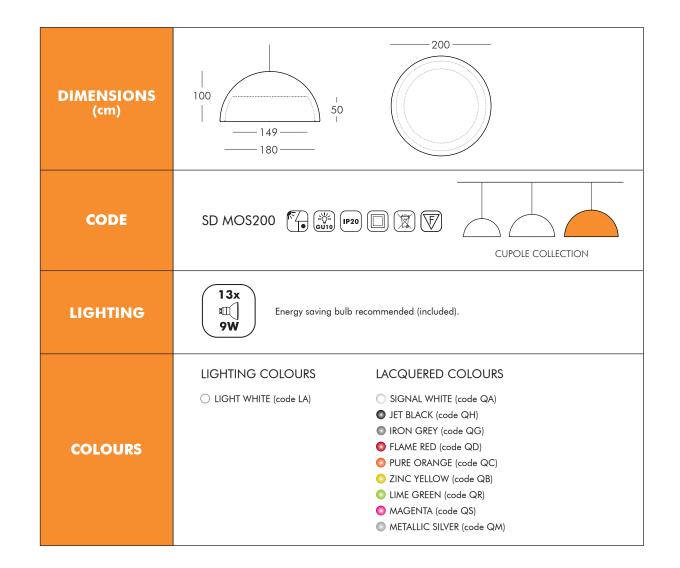

SYMBOLS

	For indoor use.		Insulation class 1.	IP20	Protected against the intrusion of solid objects $\emptyset > 12$ mm, not against water.
	For indoor and outdoor use.		Insulation class 2.	IP55	Protected against the intrusion of dust and water jets.
ħ	Stackable item.	F	Device proper to direct assembly onto normally inflammable surfaces.	IP68	Fully protected against the intrusion of dust and immersion in water.
ζ€	Conformity to the European Community instructions.	4	100% recyclable polyethylene.		
R	European Community registered model.	X	Recycling and disposal of electronic waste (WEEE).		

LIGHTING SYMBOLS

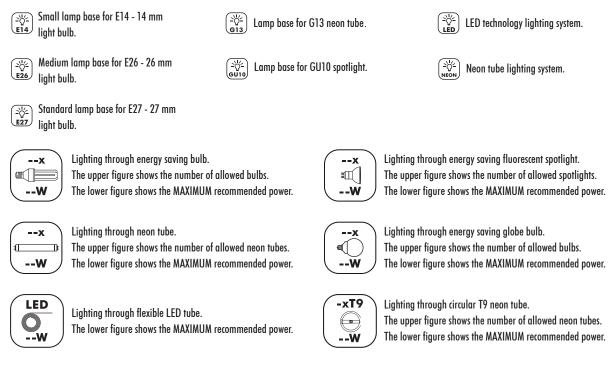

WIRING SYMBOLS




Wiring with metal clamp. IP20 protection. Diameter 11 cm.



Wiring with metal base. IP55 protection. Diameter 10 cm. Fastening by hex screw key.





I2 / E2 Wiring with plastic base and metal inserts. I2 - IP20 protection. E2 - IP55 protection. Diameter 10 cm. Fastening by slot screwdriver.

KIT LED

Wiring with plastic base for LED LP RGB100. IP20 protection. Diameter 10 cm.



Wiring with plastic screw base. 13 - IP20 protection. E3 - IP55 protection. Diameter 6 cm.

13 - IP20 protection. E3 - IP55 protection.

Wiring with plastic screw base.

Diameter 10 cm.





Wiring with plastic screw base. 13 - IP20 protection. E3 - IP55 protection. Diameter 15 cm.



Special metal base. IP20 protection. Several sizes.

MATERIAL PROPERTIES

Material: Linear low-density polyethylene - LLDPE. Production process: rotational moulding. Resistant to extreme temperatures (-60°C to +80°C). UV resistant (except for lighting colours). High tensile strength.

WARNING

- Keep away from excessive heat sources.
- Avoid any improper use. Do not stand on the products. When the product has to be moved, lift the product off the ground in order to avoid damage.
- Do not overload the pot structure in order to avoid deforming.
- Carefully comply with the maintenance & cleaning instructions.
- In case of malfunctioning or damage of the wiring or any electrical parts, refer to a qualified electrician.

MAINTENANCE & CLEANING

- To prevent dust and dirt from sticking to the plastic surfaces, periodically clean the products with a damp cloth and neutral liquid soap diluted in water.
- Avoid using ethanol or any liquids containing, even in small amounts, acetone, trichloroethylene or ammonia (solvents in general).
- It is recommended the use of SLIDE's "CleanUp" cleaner or a degreaser. In case of persistent stains, use a scrub eraser (melamine foam - Scotch-Brite® Easy Eraser or similar) or a high pressure washer. Spray the cleaning product on the surface, rub with a damp cloth and rinse abundantly with water (preferably with a high pressure washer).
- The lacquered version is suitable also for outdoor use, however it is more sensitive to scratches: periodically clean with a polish cleaner, gently rubbing with soft cloth/cotton wool.
- Cushions can be cleaned with a damp cloth, neutral liquid soap and water.
- For metal parts use specific cleaners.

SUSTAINABILITY & RECYCLING

All SLIDE products are 100% recyclable. Furthermore, grey, black and chocolate matt colours are produced with recycled polyethylene. SLIDE has a closed production cycle with no health prejudicial emissions and complying with ecological sustainibility rules.

When a product reaches the end of its life, do not treat the product or any of its parts as domestic waste. Dispose by sending to differentiated collection centres.

RESPONSIBILITY & RETURNS

SLIDE declines any liability to damages caused to things or persons by an illegitimate use of the product. SLIDE won't accept any returned goods without having checked the kind of defects first.

WARRANTY

SLIDE products are guaranteed against all manufacturing faults, granted that the items are appropriately used, for twenty-four (24) months from the date of purchase upon presentation of the invoice.

LED KITS only are guaranteed for twelve (12) months from the date of purchase.

Warranty doesn't include parts that are subject to wear and tear due to usage, batteries when provided, wiring and electrical parts that do not have manufacturing faults.