

table & floor



Weblink
187

Design
Poul Henningsen

Concept
PH 3½-2½ Floor provides soft illumination. The PH 3½-2½ Floor is based on the principle of a reflecting multi-shade system, producing a harmonious and glare free illumination. The shades are drawn over a logarithmic spiral, with the center of the light source placed in the spiral's focal point.


Finish
White opal glass. High lustre chrome plated.

Material
Base: High lustre chrome plated, spun brass. Shades: Handblown white opal glass. Top plate: High lustre chrome plated, spun brass. Stem: High lustre chrome plated, steel.

Mounting
Cord type: Black. Cord length: 12'. Switch: In-line on/off foot switch provided.

Weight
Max. 16.5 lbs.

Label
cUL, Dry location. IBEW.

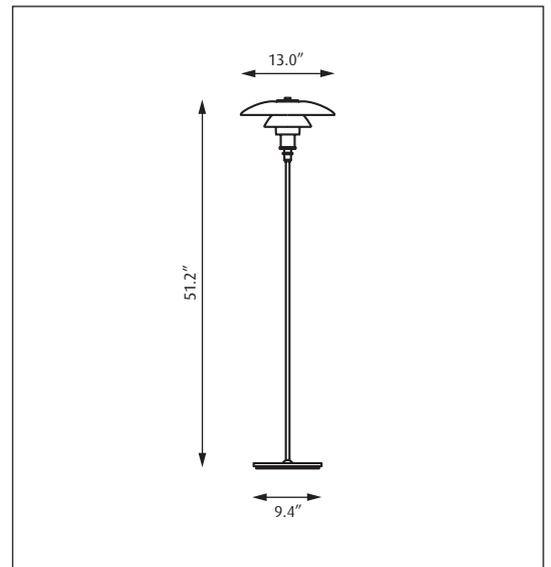

Product code	Light source	Voltage	Finish
PH3½-2½-F	1/100W/A-19/IF medium	120V	GLASS

Info notes:
I. All handblown opal glass shades are sandblasted on the underside for uniform light distribution.
II. The comparable EU version has the following classification: Ingress Protection Code: IP20.





Private Residence
Aichtal, Germany
Architect
Prof. Hans Klumpp & Julia Klumpp
Photo
Günther Lehnert