

# LINE - VOLTAGE HEADS

## Tweak Ceramic Metal Halide MR16/PAR Head

### DESCRIPTION


Minimal head pivots vertically 180°, rotates horizontally 350°. Features horizontal locking mechanisms. Includes energy-saving electronic ballast in slim aluminum die cast housing. Input voltage 120v 50/60 hertz; THD<10%. Power Jack version is compatible with Power Jack Canopy with CMH Ballast (sold separately). Ceramic metal halide MR16 lamp with GX10 base up to 39 watts; ceramic metal halide PAR20 lamp with E26 medium base up to 39 watts; PAR30 long lamp with E26 medium base up to 70 watts (lamp not included).

### ACCESSORIES & OPTICAL CONTROLS

PAR Louver Lens Holder

### WEIGHT

1lb / 0.45kg ±

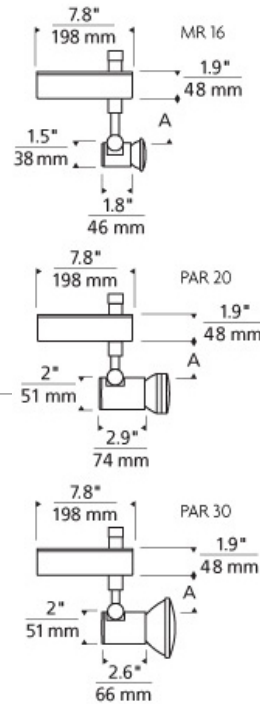

### ORDERING INFORMATION

700 SYSTEM	TWSC	SHAPE OR SIZE	LENGTH (A)	FINISH
PJ	POWERJACK	162 MR16 20 WATT	06 6"	S SATIN NICKEL
TT	SINGLE-CIRCUIT T-TRAK	163 MR16 39 WATT	12 12"	W WHITE
TT2	TWO-CIRCUIT T-TRAK	202 PAR20 20 WATT		
		203 PAR20 39 WATT		
		30L2 PAR30 LONG 20 WATT		
		30L3 PAR30 LONG 39 WATT		
		30L7 PAR30 LONG 70 WATT		



**TECH LIGHTING®**

7400 Linder Avenue T 847.410.4400  
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 \_\_\_\_ TWSC \_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2014 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.