


#### **BATH COLLECTION**

#### **GENERAL PRODUCT INFORMATION:**


Mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box.






This product may be dimmed with a low-voltage electronic dimmer.

### Install the Fixture



- 1 With the Allen wrench provided, remove the two mounting plate screws.
- Remove the mounting plate from the back of the fixture.




Secure the mounting plate to the electrical box with the provided #8-32 screws.



#### **CAUTION - RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

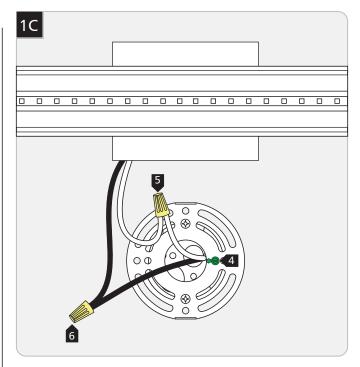


- 4 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5 Connect the white ballast wire to the neutral power line wire with a wire nut.
- 6 Connect the black ballast wire to the hot power line wire with a wire nut.
- Mount the fixture by sliding it back onto the mounting plate and re-installing the mounting plate screws (reversal of figure 1A).

## **Install the Shade**

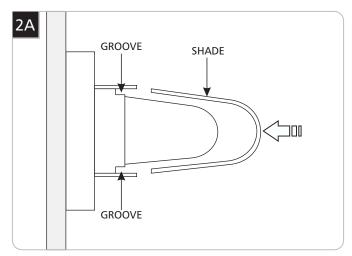


1 Install the shade into the grooves in the fixture base and hold it in place.



2 Secure the shade by installing the brackets and tightening the bracket screws with the provided Allen wrench.

# Install the Accessory (optional)

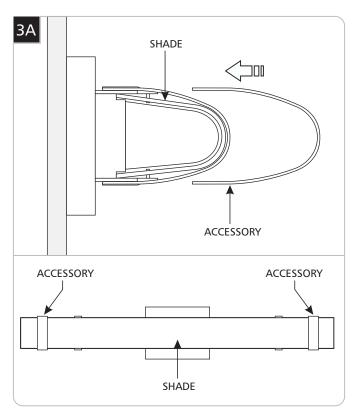

Slide the accessories onto the glass, until it snaps into place, at the desired location.

## **SAVE THESE INSTRUCTIONS!**



7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.techlighting.com

© 2014 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company