700WSBOR CF

1.2



WALL COLLECTION


GENERAL PRODUCT INFORMATION:



This product is suitable for damp locations.

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.


This product is designed to be mounted vertically, as shown.




CAUTION—RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and DISCONNECT POWER TO THE ELECTRICAL BOX.

Mount the Fixture

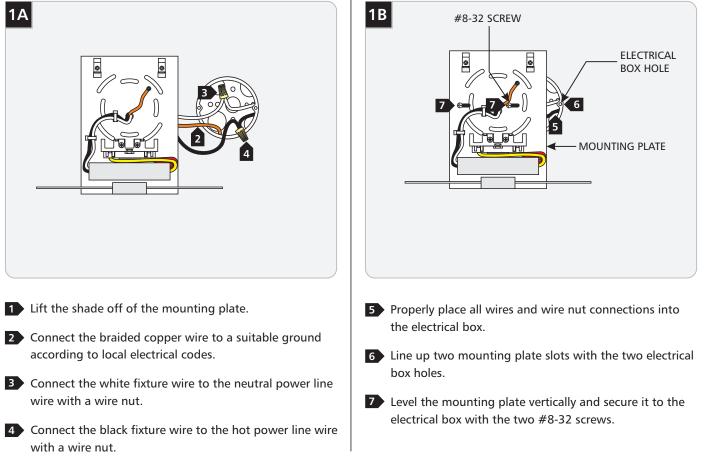

Install the Lamp

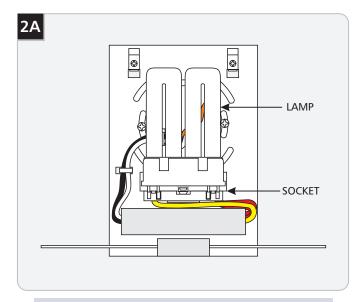

CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.


Use **MAX 18** Watt type **T5** Dulux 2G10 base flat compact fluorescent lamp.



1 Line up the lamp pins with the socket slots and push the lamp pins completely into the socket slots.

NOTE: When relamping, push the tab in the middle of the socket to release the lamp.

Reinstall the Fabric Shade

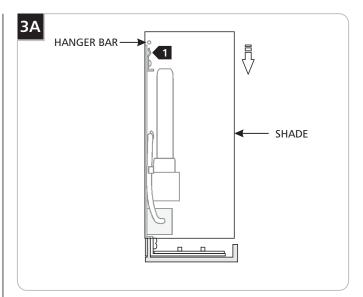

1 Carefully slide the shade onto the arm while attaching the hanger bar to the clips.

SAVE THESE INSTRUCTIONS!



© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company