



Job Name: \_\_\_\_\_

Contact: \_\_\_\_\_

Fixture Type: \_\_\_\_\_


Part Number: \_\_\_\_\_

SILVA LED DOWN MP2



**Description:**

Silva Down pendant comes with a matte white inner diffuser shade accompanied with a transparent outer glass for all colored Silva glass. Black and White Silva glass is not transparent and does not include a matte inner diffuser shade. The Silva 3 Watt LED Pendant fixture includes a 2" kiss mono-point canopy with 3 Watt LED and driver. Standard cable length of 59" can be adjusted in the field, or specified when ordering. May be specified with 4" kiss mono-point canopy by adding /MP to the part number.

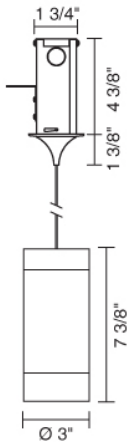

**Part Numbers:**

- 222711bz/MP2** bronze, orange glass
- 222711ch/MP2** chrome, orange glass
- 222711mc/MP2** matte chrome, orange glass
- 222712bz/MP2** bronze, white glass
- 222712ch/MP2** chrome, white glass
- 222712mc/MP2** matte chrome, white glass
- 222713bz/MP2** bronze, smokey glass
- 222713ch/MP2** chrome, smokey glass
- 222713mc/MP2** matte chrome, smokey glass
- 222714bz/MP2** bronze, turquoise glass
- 222714ch/MP2** chrome, turquoise glass
- 222714mc/MP2** matte chrome, turquoise glass
- 222715bz/MP2** bronze, red glass
- 222715ch/MP2** chrome, red glass
- 222715mc/MP2** matte chrome, red glass
- 222716bz/MP2** bronze, black glass
- 222716ch/MP2** chrome, black glass
- 222716mc/MP2** matte chrome, black glass

**Technical Specs:**

100-240V AC, 50/60Hz input  
700mA DC constant current output  
6VA, 3W for 1 (3 Watt LED)  
3000K  
68 lpw

[see technical sheet](#)

Suitable for dry locations only

2 1/4" hole cutout  
Required material thickness 3/16" - 1 1/16"  
Not thru-wire rated  
Short circuit protection  
Overload protection  
Thermal protection