




VBLFT LED Tube Range

Applications:

- Offices
- Shopping Centre
- Airports
- Railway Stations
- Factories
- Carparks

Features:

- Latest lockable rotating end cap
- Isolated power supply
- Saves 70% on Energy costs
- Environmentally Friendly

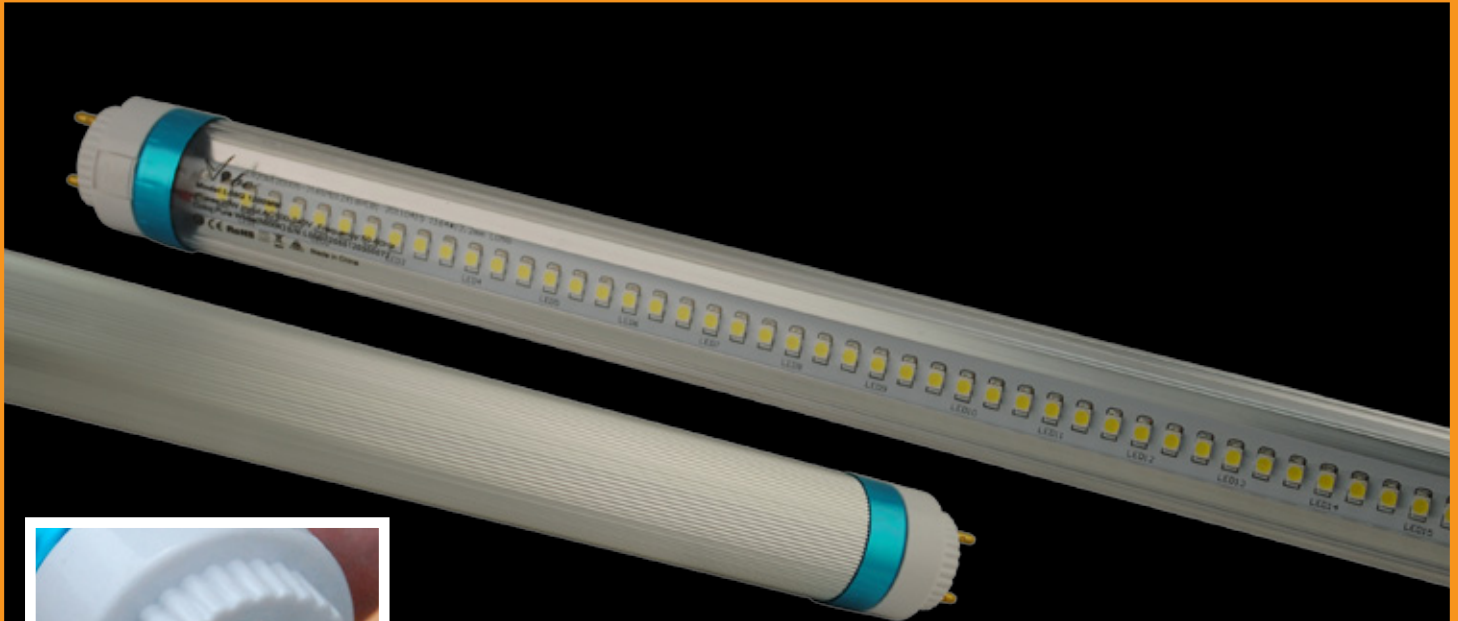

Specifications:



Base	G13
Input Voltage	AC110-265V
Output Voltage	DC38V
HZ	50-60Hz
LED Source	SMD3528
CRI	>80
Beam Angle	120°
Lamp Life	50,000 hours
Safety Certificates	TUV / CE / RoHS
Warranty	3 years

Rotating Steps:



1. Open lock button



2. End cap rotated to scale



3. Release button, end cap locked automatically

5000K Specifications:

Model Number	VBLFT-125-C-50	VBLFT-135-C-50	VBLFT-145-C-50	VBLFT-155-C-50
Power Consumption	11W	20W	20W	24W
Dimension	600mm x Ø26mm	900mm x Ø26mm	1200mm x Ø26mm	1500mm x Ø26mm
Lumens Output	1155lm	2100lm	2100lm	2520lm

7000K Specifications:

Model Number	VBLFT-125-C-70	VBLFT-135-C-70	VBLFT-145-C-70	VBLFT-155-C-70
Power Consumption	11W	20W	20W	24W
Dimension	600mm x Ø26mm	900mm x Ø26mm	1200mm x Ø26mm	1500mm x Ø26mm
Lumens Output	1155lm	2100lm	2100lm	2520lm


****Different variations are available for project orders on request**

****Only suitable for battens with magnetic ballasts, not electronic**

1. When tubes are replaced in a standard fluorescent batten, the starter must be removed and replaced by the included fuse.




2. Electronic ballasts must be bypassed by a registered electrician.




VBLFT-145-C Photometrics:

5000K



Height (m)	Illuminance	Diameter (mm)
1.1	624.50	1247.68
2.2	156.13	2495.36
3.3	69.39	3743.05
4.4	39.03	4990.73
5.5	24.98	6238.41

7000K



Height (m)	Illuminance	Diameter (mm)
1.1	584.21	1247.68
2.2	146.05	2495.36
3.3	64.91	3743.05
4.4	36.51	4990.73
5.5	23.37	6238.41