





VBL-1661-WH & VBL-1671-WH

Applications:

- Residential
- Hotels
- Museums
- Exhibitions
- Restaurants & Cafes
- Promotional Areas
- Supermarkets

Features:

- BRIDGELUX LED CHIP
- SAA Approved Driver
- Architecturally designed
- Replaces 75-100W Halogen, 20W Metal Halide
- High LOR patented reflector
- Very high light output

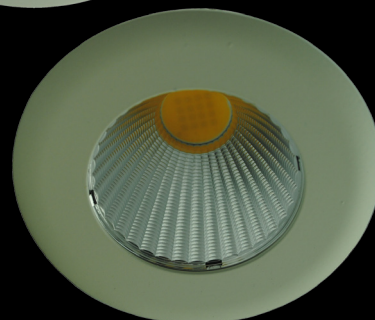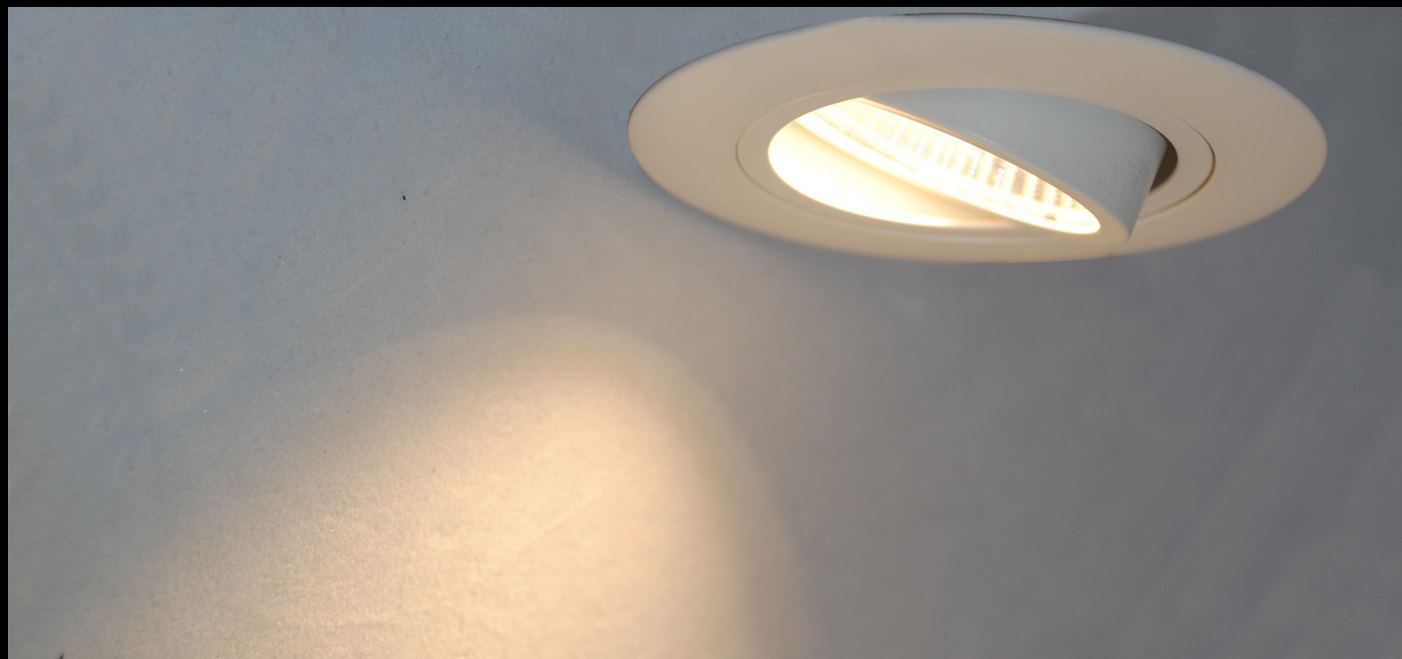





Specifications:

Model Number	VBL-1661-WH-3K	VBL-1661-WH-4K	VBL-1671-WH-3K	VBL-1671-WH-4K
Fixed / Gimbal	Gimbal	Gimbal	Fixed	Fixed
Power Consumption	16W	16W	16W	16W
Input Voltage	220-240V	220-240V	220-240V	220-240V
Output Voltage	9-16V	9-16V	9-16V	9-16V
Constant Current	1050mA	1050mA	1050mA	1050mA
HZ	50Hz	50Hz	50Hz	50Hz
LED Source	BRIDGELUX	BRIDGELUX	BRIDGELUX	BRIDGELUX
Colour Temperature	3000K	4100K	3000K	4100K
Lumens Output	717lm	826lm	717lm	826lm
Luminaire Efficacy	82%	82%	82%	82%
CRI	>80	>80	>80	>80
Beam Angle	40°	40°	40°	40°
Lamp Life	35,000 ~ 50,000 hrs	35,000 ~ 50,000 hrs	35,000 ~ 50,000 hrs	35,000 ~ 50,000 hrs
Energy Grade	1	1	1	1
Dimension	Ø98 x 90mm	Ø98 x 90mm	Ø80 x 90mm	Ø80 x 90mm
Cutout	Ø88mm	Ø88mm	Ø70mm	Ø70mm
Safety Certificates	CE, SAA	CE, SAA	CE, SAA	CE, SAA
Warranty	3 years	3 years	3 years	3 years
Replacement	75-100W Halogen, 20W Metal Halide	75-100W Halogen, 20W Metal Halide	75-100W Halogen, 20W Metal Halide	75-100W Halogen, 20W Metal Halide

IES Files and Comprehensive Photometric Reports are available.
Non-dimmable fitting

3000K - Warm White

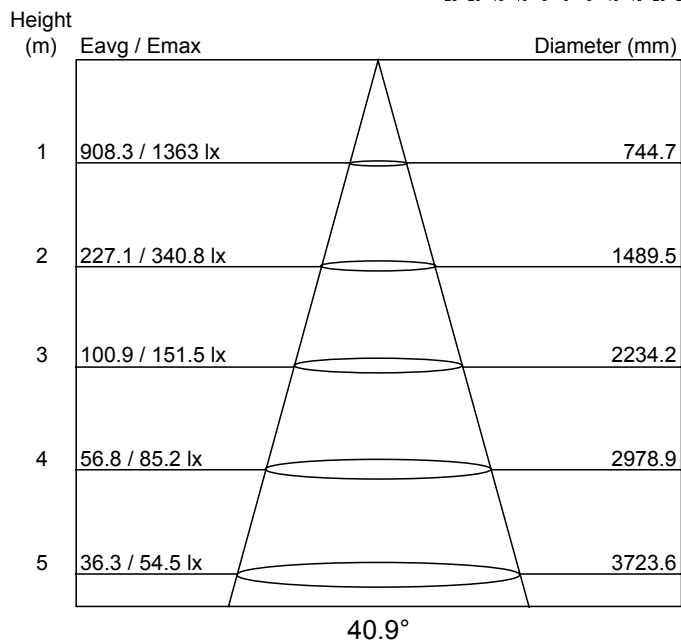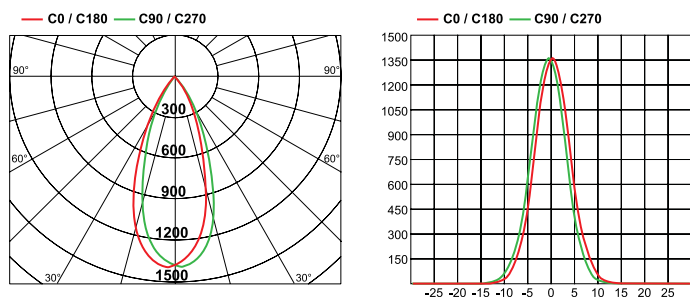

4100K - Cool White

