



VBLDL-102

Applications:

- Residential
- Hotels
- Offices
- Restaurants

Features:


- SAA Approved
- Life time of 40,000 hours
- Low energy consumption
- Dimmable with most HPM/CLIPSAL leading or trailing edge dimmers



Specifications:


Model Number	VBLDL-102-1-30	VBLDL-102-1-50	VBLDL-102-2-30	VBLDL-102-2-50
Power Consumption	15W	15W	15W	15W
Input Voltage	220-240V	220-240V	220-240V	220-240V
HZ	50/60Hz	50/60Hz	50/60Hz	50/60Hz
LED Source	Epistar	Epistar	Epistar	Epistar
Colour Temperature	3000K	5000K	3000K	5000K
Lumens Output	817.49lm	918.94lm	817.49lm	918.94lm
Luminaire Efficacy	54.5lm/W	61.27lm/W	54.5lm/W	61.27lm/W
CRI	80-85	80-85	80-85	80-85
Beam Angle	103°	106°	103°	106°
Lamp Life	40,000 hours	40,000 hours	40,000 hours	40,000 hours
Energy Grade	1	1	1	1
Dimension	Ø110 x 68mm	Ø110 x 68mm	Ø110 x 68mm	Ø110 x 68mm
Cutout	Ø90	Ø90	Ø90	Ø90
Trim	White	White	Satin Chrome	Satin Chrome
Weight per Item	0.6kg	0.6kg	0.6kg	0.6kg
Power Supply	HY12W400R22	HY12W400R22	HY12W400R22	HY12W400R22
Safety Certificates	SAA / RCM	SAA / RCM	SAA / RCM	SAA / RCM
Warranty	3 years	3 years	3 years	3 years

3000K

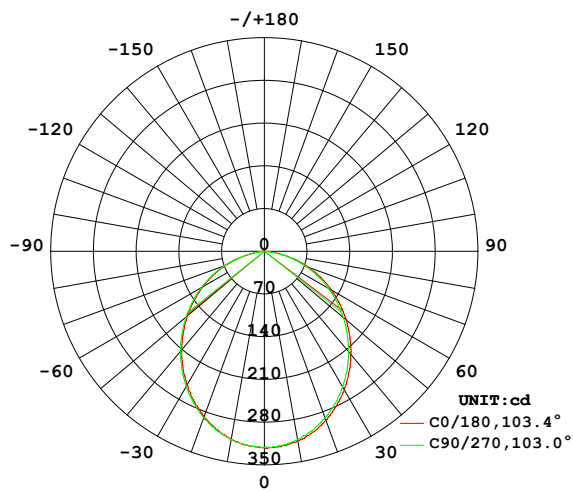

Height (m)	Emax	Diameter (mm)
1	322.8lx	2507.2
2	80.69lx	5014.4
3	35.86lx	7521.6
4	20.17lx	10028.8
5	12.91lx	12536

5000K

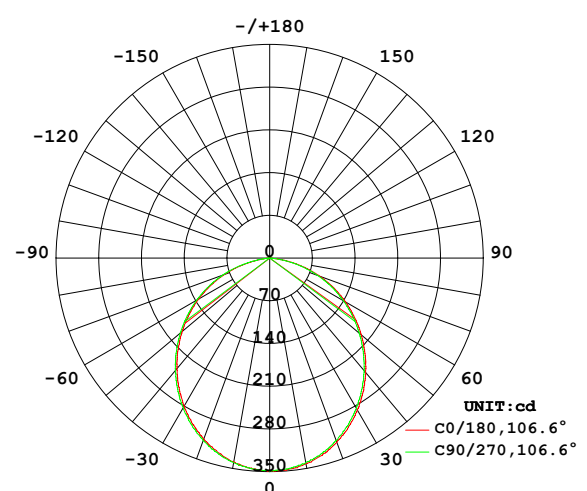

Height (m)	Emax	Diameter (mm)
1	349.9lx	2676.4
2	87.46lx	5352.8
3	38.87lx	8029.2
4	21.87lx	10705.6
5	13.99lx	13382